

NOTES:

1.0 SPECIFICATIONS

1.1 FREQ. RANGE: DC to 2.0 GHz

1.2 ATTENUATION ACCURACY:

0dB	+0.3dB
0.5 to 6dB	±0.3dB
7 to 20dB	±0.5dB
21 to 30dB	±1.0dB

1.3 MAXIMUM VSWR: 1.07 + .015f (GHz)

1.4 MAXIMUM INPUT POWER:
2 WATTS AVG AT +25°C DERATED LINEARLY
TO 0.5 WATTS AT +125°C.


1.5 OPERATING TEMP. RANGE: -65°C to +125°C

2.0 MARKING

2.1 MARK UNIT AS SHOWN
(REF: INK-05022-27-XX)

△3 EPOXY SEAL FEMALE END ONLY FOR 1-30dB.
EPOXY SEAL MALE & FEMALE ENDS FOR 31-60dB.
PER EPX-08000-44-01. N/A FOR "O" RING HARDWARE

4.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS.

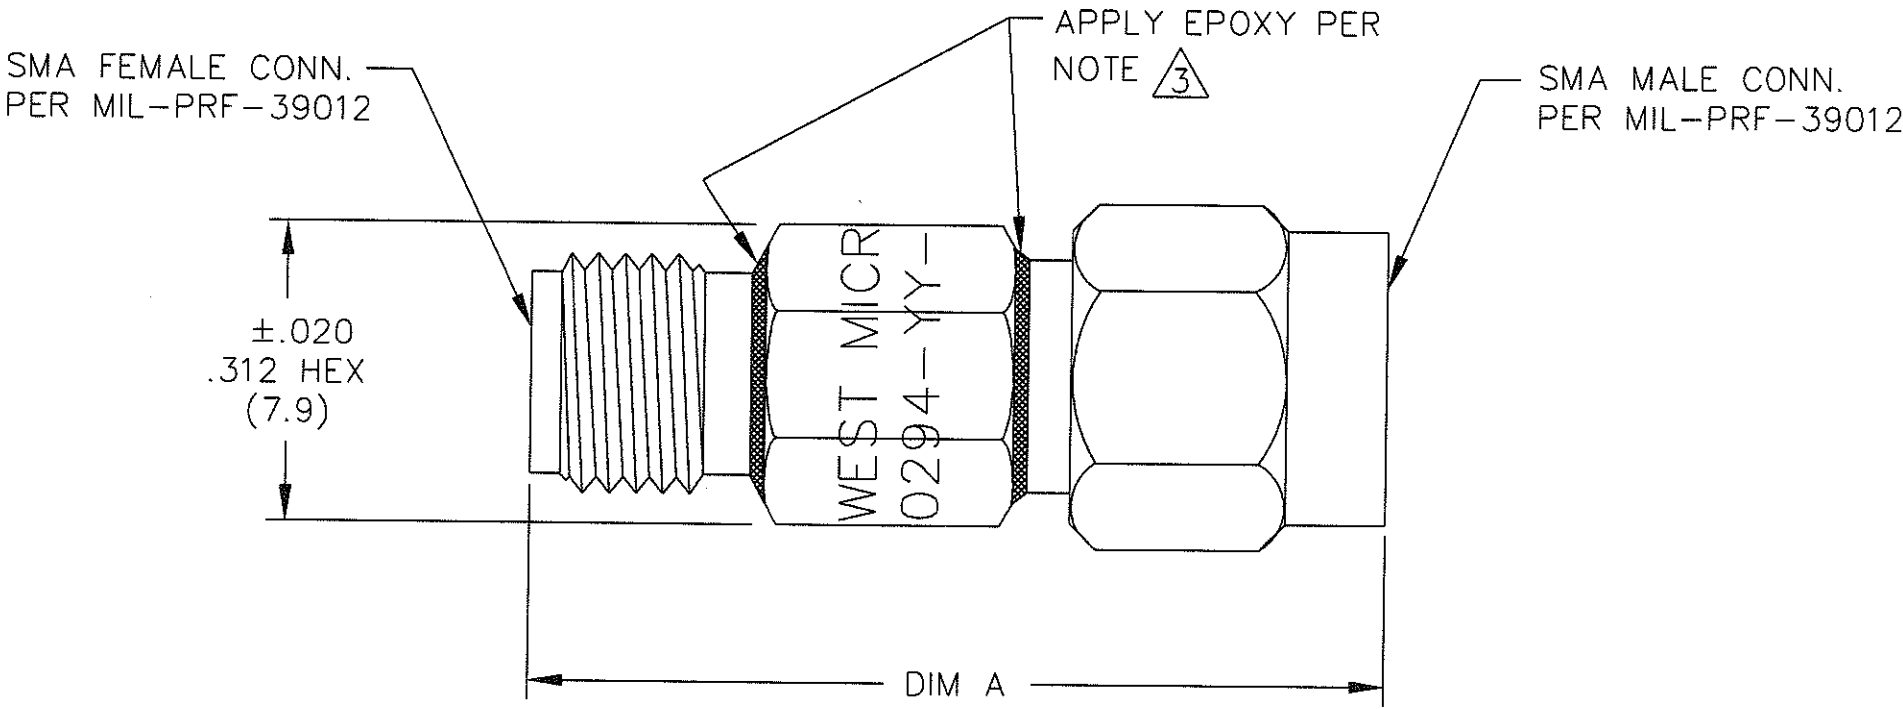

13 - 30dB	1.02 (25.9)
0 - 12dB	.86 (21.8)
ATTENUATION VALUE	DIM A

REV.	DESCRIPTION	DATE
-	RELEASED	4/20/84
A	ECR 2943	6-21-84
B	ECR 3979	10-30-85
C	ECR 4083	12-6-85
D	ECR 4684	7-17-86
E	ECR 6239	10-27-86
F	ECR 6545	7-10-89
G	REDRAW ON CAD	8/19/92
H	ECN 16216	9/16/97
J	ECN 20367	3/28/05

DWG NO. WAS: 04243-01-00

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		FSCM NO. 34078		MIDWEST MICROWAVE	
3 PLACE DECIMALS ±.005		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE ATTENUATOR	
2 PLACE DECIMALS ±.02					
FRACTIONS ±1/64					
PARALLELITY: T.I.R. _____					
FLATNESS: T.I.R. _____		DRAWN/DATE M.HOLLMAN 8/20/92		ENG./DATE G.KOZAK 9/15/92	
CONCENTRICITY: T.I.R. _____		CHECKED/DATE A.BEATTY 9/14/92		APPROVED/DATE	
ANGLES AND PERPENDICULARITY: ±1°				DRAWING NUMBER ATT-0294-XX-HEX-02	
		SCALE: 5=1		SHEET 1 of 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions:

[ATT-0294-30-HEX-02](#) [ATT-0294-07-HEX-02](#) [ATT-0294-08-HEX-02](#) [ATT-0294-09-HEX-02](#) [ATT-0294-10-HEX-02](#)
[ATT-0294-15-HEX-02](#) [ATT-0294-20-HEX-02](#) [ATT-0294-01-HEX-02](#) [ATT-0294-02-HEX-02](#) [ATT-0294-03-HEX-02](#)
[ATT-0294-04-HEX-02](#) [ATT-0294-05-HEX-02](#)