

NOTES:

- 1.0 SPECIFICATIONS.
- 1,1 FREQUENCY RANGE: DC to 26.5 GHz
- 1.2 ATTENUATION ACCURACY:


1 thru 6dB: ±0.5dB

7 thru 20dB: ±0.7dB

21 thru 30dB: ±1.0dB
- 1.3 MAXIMUM VSWR: 1.07 + .015 f (GHz)
- 1.4 MAXIMUM INPUT POWER:

2 WATTS AVG. AT +25°C DERATED

LINEARLY TO 0.5 WATTS AT +125°C.
- 1.5 OPERATING TEMP. RANGE: -65°C to +125°C
- 2.0 MARKING.
- 2.1 MARK UNIT AS SHOWN.
- (REF.: INK-08064-27-XX)
- 3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

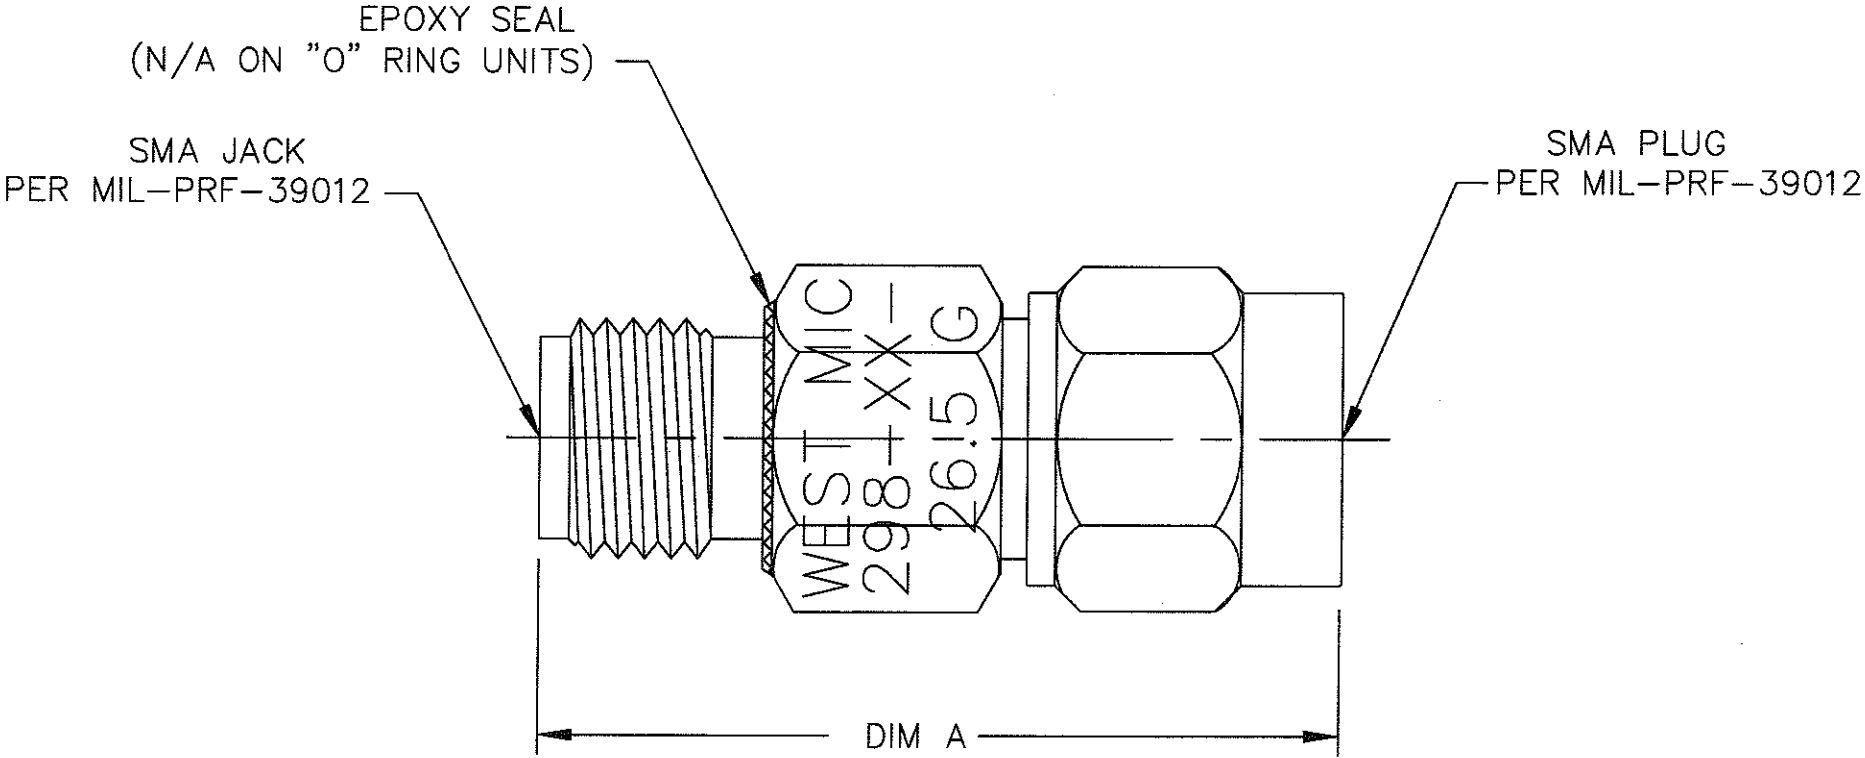

ATTENUATION VALUE	DIM A
1 to 12dB	.86(21.8)
13 to 30dB	1.02(25.9)

MODEL NUMBER	REV.
ATT-0298-XX-HEX-02	B

REV.	DESCRIPTION	DATE
-	RELEASED	7/1/99
A	ECN 19827	5/14/04
B	ECN 20463	6/20/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS ±.005

2 PLACE DECIMALS ±.02

FRACTIONS ±1/64

PARALLELITY: T.I.R. _____

FLATNESS: T.I.R. _____

CONCENTRICITY: T.I.R. _____

ANGLES AND PERPENDICULARITY: ±1°

FSCM NO.

34078

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave

DRAWN/DATE

M.STAFFORD

6/25/99

CHECKED/DATE

ENG./DATE

G.KOZAK

7/1/99

APPROVED/DATE

TITLE

ATTENUATOR

DRAWING NUMBER

ATT-0298-XX-HEX-02

SCALE: 5=1

SHEET 1 of 1

MIDWEST MICROWAVE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions:

[ATT-0298-18-HEX-02](#) [ATT-0298-19-HEX-02](#) [ATT-0298-20-HEX-02](#) [ATT-0298-30-HEX-02](#) [ATT-0298-12-HEX-02](#)
[ATT-0298-13-HEX-02](#) [ATT-0298-14-HEX-02](#) [ATT-0298-15-HEX-02](#) [ATT-0298-16-HEX-02](#) [ATT-0298-17-HEX-02](#)
[ATT-0298-06-HEX-02](#) [ATT-0298-07-HEX-02](#) [ATT-0298-08-HEX-02](#) [ATT-0298-09-HEX-02](#) [ATT-0298-10-HEX-02](#)
[ATT-0298-11-HEX-02](#) [ATT-0298-01-HEX-02](#) [ATT-0298-02-HEX-02](#) [ATT-0298-03-HEX-02](#) [ATT-0298-04-HEX-02](#)
[ATT-0298-05-HEX-02](#)