



The VKA100xSC Series DC/DC converters present an economical and practical solution for distributed power system architectures which require high power density and efficiency while maintaining system modularity and upgradeability. With the ability to operate over a wide input voltage range of 18 to 36 and 33 to 75 volts, these modules are ideal for use in battery

- RoHS Compliant
- 33 - 75V Input Range
- High Efficiency: 87% Typical at 5V
- 100mS Transient Response 50-100% Load Step
- 420 kHz Fixed-Frequency Operation
- Remote Sense

- Operation to +100°C Baseplate Temperature
- Primary Remote On/Off, Choice of Pos/Neg Logic
- Adjustable Output Voltage
- Continuous Short-Circuit Protection
- Thermal Shutdown
- Case Ground Pin

backup applications common in today's telecommunication and electronic data processing applications. The output is fully isolated from the input, allowing for a variety of polarity and grounding configurations.

The VKA100xSC's proprietary control circuitry responds to 50-100% load steps in 100mSeconds to within 1% nominal Vout.

The patented fixed frequency architecture combined with surface mount technology results in a compact, efficient and reliable solution to DC/DC conversion requirements. Safety Per UL1950, EN 60950 and CSA 22.2 #234

PRODUCT SELECTION CHART

MODEL	INPUT VOLTAGE	VOUT (VDC)	IOUT (A)	EFFICIENCY	
				MIN	TYP
VKA100LS02C		2.0V	20.0	75	76
VKA100LS02FC		2.0V	30.0	73	74
VKA100LS2V5FC		2.5V	30.0	75	76
VKA100LS03C		3.3V	20.0	80	81
VKA100LS03FC		3.3V	30.0	80	81
VKA100LS05C	24VDC	5.0V	20.0	85	86
VKA100LS12C		12.0V	8.3	87	88
VKA100LS15C	(18-36)	15.0V	6.7	88	89
VKA100LS24C		24.0V	4.2	89	90
VKA100MS02C		2.0V	20.0	76	77
VKA100MS02FC		2.0V	30.0	74	75
VKA100MS2V5FC		2.5V	30.0	77	78
VKA100MS03C		3.3V	20.0	81	82
VKA100MS03FC		3.3V	30.0	81	82
VKA100MS05C	48VDC	5.0V	20.0	86	87
VKA100MS12C		12.0V	8.3	88	89
VKA100MS15C	(33-75)	15.0V	6.7	89	90
VKA100MS24C		24.0V	4.2	89	90




For full details go to
www.murata-ps.com/rohs



SPECIFICATIONS, ALL MODELS


Specifications are at $T_{CASE} = +40^{\circ}\text{C}$ nominal input voltage unless otherwise specified.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT	Voltage Range VKA100LS	18	24	36	VDC
	VKA100MS	33	48	75	VDC
	Maximum Input Current VKA100LS	$V_{IN} = 16\text{VDC}$		7.4	A
	VKA100MS	$V_{IN} = 27\text{VDC}$		4.4	A
	Reflected Ripple Current	Peak - Peak	20		mA
	Input Ripple Rejection	DC to 1KHz	50	60	dB
	No Load Input Current LS/MS		140/80		mA
	No Load	Power Dissipation LS/MS	3.4/3.8		W
	Standby, Primary On/Off Disabled LS/MS		0.12/0.24		W
	Inrush Charge VKA100LS	$V_{IN} = V_{IN} \text{ max.}$		0.520	mC
OUTPUT	VKA100MS			0.360	mC
	Quiescent Operating Current Primary On/Off Disabled		5	12	mA
	Rated Power	0		100	W
	Set point Accuracy			1	%
	Line Regulation	High Line to Low Line	0.02	0.05	%
	Load Regulation	No Load to Rated Load	0.2	0.5	%
	Output Temperature Drift		± 0.2		$^{\circ}\text{C}$
	Output Ripple, p-p	DC to 20MHz BW	1%		V_{OUT} , Nom
	Output Current Limit Inception		130%	150%	I_{OUT} , Nom
	Output Short-Circuit Current (2)	test	120%	150%	I_{OUT} , Nom
GENERAL	Output Overvoltage Limit		125%	135%	V
	Transient Response	50 to 100% Load Step			
	Peak Deviation	$dI/dt = 0.1\text{A}/\mu\text{Sec}$	2%		V_{OUT} , Nom
	Settling Time	$V_{OUT}, 1\%$ of Nominal Output	100		μSec
	ISOLATION	Peak Test for 2 Seconds	1500		VDC
	Input to Output		1500		VDC
	Input to Baseplate		500		VDC
	Output to Baseplate		10		MΩ
	Resistance		2000		pF
	Capacitance		180		μA, rms
TEMPERATURE	GENERAL				
	Efficiency, Line, Load, Temp. (3)				
	Switching Frequency		400	420	KHz
	Remote Sense Compensation			0.5	V
	Output Voltage Adjust Range	12 V & higher(4)	-50% / +25%		V_{OUT} , Nom
	Remote On/Off Control Inputs				
	Primary	Open Collector/Drain			
	Sink Current-Logic Low			1.0	mA
	Vlow			0.4	V
	Vhigh0			Open Collector	
NOTES:	Turn-on Time	Within 1% of Rated Output	10.0	12.5	mSec
	Weight			85 (3.0)	g (oz.)
	OPERATION/SPECIFICATION				
	Operation/Specification	Case Temperature	-40	+25	°C
	Storage	Case Temperature	-55	+25	°C
	Shutdown Temperature	Case Temperature	+100		°C
	Thermal Impedance, case-ambient			7.1	°C/W
	Lead Solder Temperature	10 Seconds max		+300	°C
	(1) See Typical Performance Curves, page 3				
	(2) Continuous Mode				
(3) See graphs for Efficiency vs. Output Load, V_{IN} , T_{CASE}					
	(4) 3.3V Models Limited in Trim Down Range				
	(5) Consult Factory for Details				

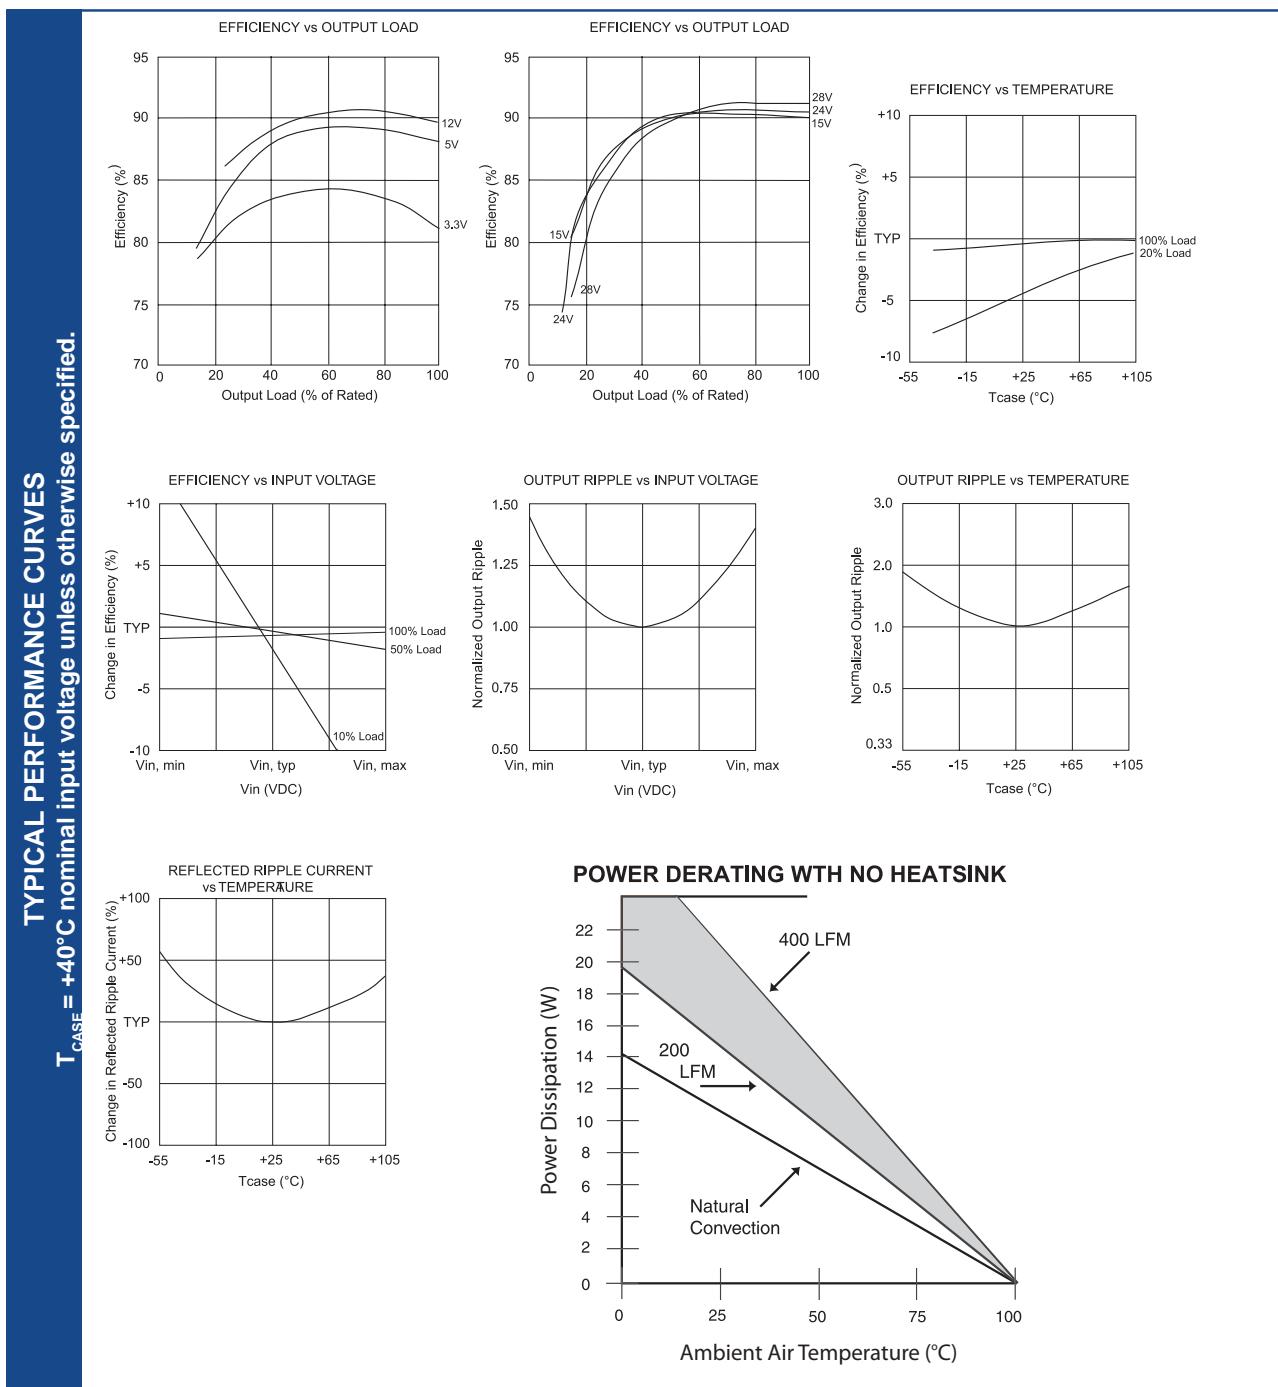

ORDERING INFORMATION

Device Family _____
 Indicates 100 Watt Regulated Unit
 Model Number _____
 Selected from Table of Electrical Characteristics
 Where:
 x = Input Voltage (L = 24VDC; M = 48VDC)
 zz = Output Voltage (03=3.3V, 05=5V, etc.)
 Lead Length _____
 0.200" - No Number
 0.145" - (6)
 0.110" - (8)
 Remote On-Off Logic: _____
 Positive - No Number
 Negative - (1)

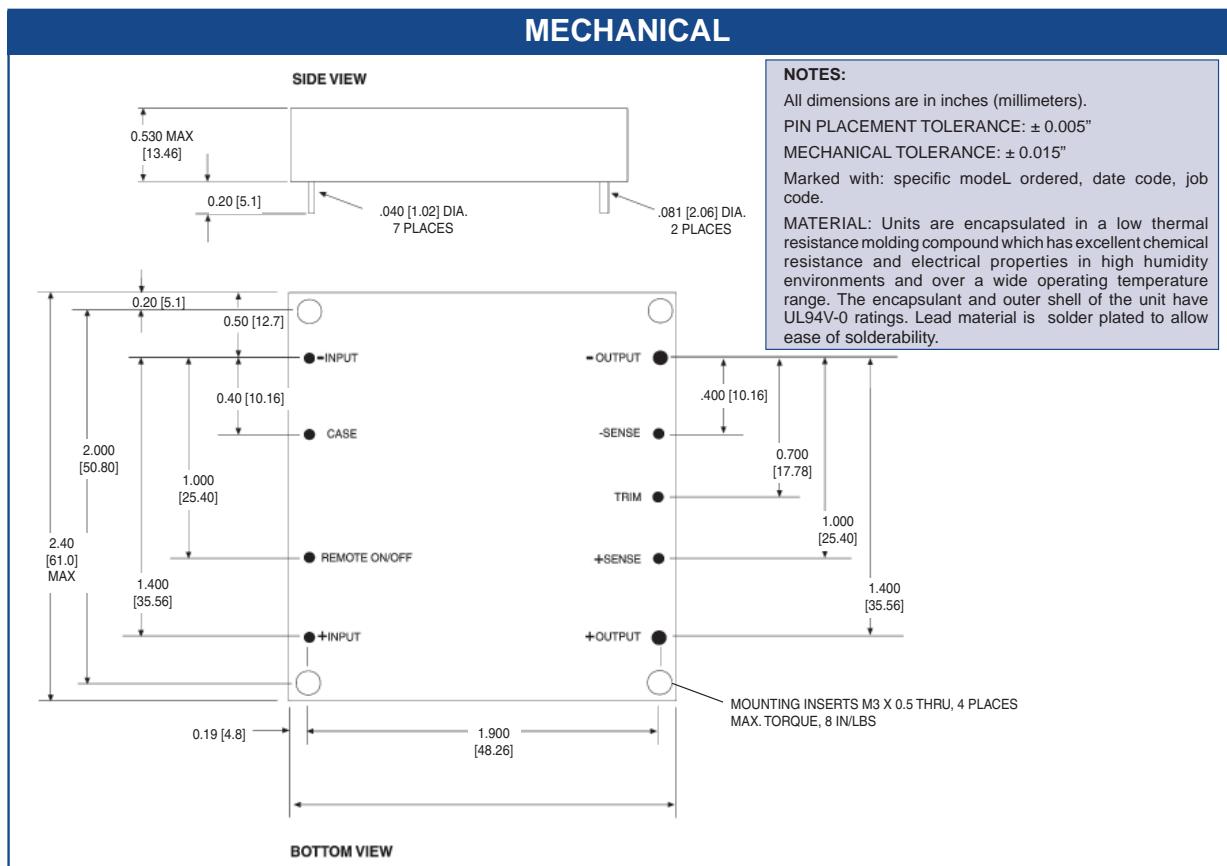

OUTPUT ADJUST VOLTAGE

This feature allows the user to accurately adjust the module's output voltage set point to a specified level. This is achieved by connecting a resistor or potentiometer from the TRIM terminal to either the +Vout terminal (for increased Vout) or the -Vout terminal (for decreased Vout). The formulae below describe the trim resistor value to obtain a Vout change of $\Delta\%$. Vo is output voltage prior to adjustment (3.3V, 5V, 12V, 15V, or 24V).

$$R_{adj-up} = \left(\frac{V_o(100 + \Delta\%)}{1.225\Delta\%} - \frac{(100 + 2\Delta\%)}{\Delta\%} \right) k\Omega$$

$$R_{adj-down} = \left(\frac{100}{\Delta\%} - 2 \right) k\Omega$$

OVP NOTE

Special attention should be given to the peak voltage deviation during a dynamic load step when trimming the output above the original set point to avoid tripping the overvoltage protection circuit. Should an OVP condition occur, the converter will go into a latch condition and must be externally reset before it will return to normal operation.