



# SAW Components

Data Sheet B4864

Data Sheet

A large, stylized, 3D-rendered graphic of the EPCOS logo. The letters "EPCOS" are in a bold, sans-serif font, appearing to be part of a larger, curved structure that resembles a stylized globe or a series of overlapping planes. The graphic is rendered in shades of gray and white, with a glowing effect around the letters.



## SAW Components

B4864

## Low Loss Filter for Mobile Communication

183,60 MHz

### Data Sheet




#### Features

- Low-loss IF filter for mobile telephone
- Channel selection in AMPS systems
- Filter surface passivated
- Balanced or unbalanced operation possible
- Package for **Surface Mounted Technology (SMT)**

#### Terminals

- Ni, gold plated


#### Ceramic package QCC10B

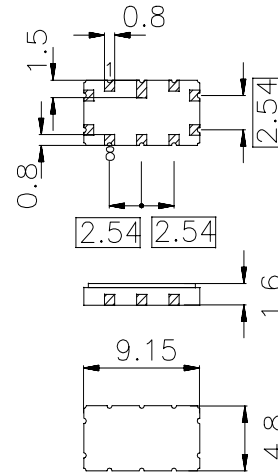

Dimensions in mm, approx. weight 0,23 g

#### Pin configuration

10	Input
5	Output
9	Balanced input or input ground
4	Balanced output or output ground
1,3,6,8	Case ground
2,7	Not connected



Type	Ordering code	Marking and Package according to	Packing according to
B4864	B39181-B4864-Z710	C61157-A7-A49	F61064-V8035-Z000

#### Electrostatic Sensitive Device (ESD)

#### Maximum ratings

Operable temperature range	$T$	- 25/+ 75	°C
Storage temperature range	$T_{stg}$	- 40/+ 85	°C
DC voltage	$V_{DC}$	13	V
Source power	$P_s$	10	dBm



## SAW Components

B4864

### Low Loss Filter for Mobile Communication

183,60 MHz

#### Data Sheet



#### Characteristics

Operating temperature range:	$T = -25^{\circ}\text{C} \dots 75^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 410 \, \Omega \parallel -0,4 \, \text{pF}$
Terminating load impedance:	$Z_L = 410 \, \Omega \parallel -0,4 \, \text{pF}$

		min.	typ.	max.	
<b>Nominal center frequency</b>	$f_N$	—	183,60	—	MHz
<b>Filter bandwidth at -5 dB</b>		+/-11	62	—	kHz
<b>Minimum insertion attenuation</b> (including losses in the matching network without loss of the balun)	$\alpha_{\min}$	—	4,8	6,0	dB
<b>Group delay ripple (p-p)</b> $f_N - 13,0 \, \text{kHz} \dots f_N + 13,0 \, \text{kHz}$	$\Delta\tau$	—	2,0	10,0	$\mu\text{s}$
<b>Relative attenuation (relative to <math>\alpha_{\min}</math>)</b>	$\alpha_{\text{rel}}$				
$f_N - 11,0 \, \text{kHz}$		—	0,5	5	dB
$f_N + 11,0 \, \text{kHz}$		—	0,5	5	dB
$f_N - 120,0 \, \text{kHz} \dots f_N - 60,0 \, \text{kHz}$		11	30	—	dB
$f_N + 60,0 \, \text{kHz} \dots f_N + 120,0 \, \text{kHz}$		11	24	—	dB
$f_N \pm 120,0 \, \text{kHz} \dots f_N \pm 130,0 \, \text{kHz}$		43	50	—	dB
$f_N \pm 130,0 \, \text{kHz} \dots f_N \pm 360,0 \, \text{kHz}$		45	55	—	dB
$f_N \pm 360,0 \, \text{kHz} \dots f_N \pm 1,4 \, \text{MHz}$		40	60	—	dB
<b>Impedance within the passband</b>					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	410 $\parallel$ 0,4	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	410 $\parallel$ 0,4	—	$\Omega \parallel \text{pF}$
<b>Temperature coefficient of frequency <sup>1)</sup></b>	$TC_f$	—	-0,036	—	ppm/K <sup>2</sup>
<b>Turnover temperature</b>	$T_0$	—	25	—	$^{\circ}\text{C}$

<sup>1)</sup> Temperature dependance of  $f_c$ :  $f_c(T) = f_c(T_0)(1 + TC_f(T - T_0)^2)$



<b>SAW Components</b>	<b>B4864</b>
<b>Low Loss Filter for Mobile Communication</b>	<b>183,60 MHz</b>
<b>Data Sheet</b>	<b>SMD</b>

### Characteristics

Operating temperature range:	$T = -30^{\circ}\text{C} \dots 80^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 410 \Omega \parallel -0,4 \text{ pF}$
Terminating load impedance:	$Z_L = 410 \Omega \parallel -0,4 \text{ pF}$

		min.	typ.	max.	
<b>Nominal center frequency</b>	$f_N$	—	183,60	—	MHz
<b>Filter bandwidth at -5 dB</b>		+11	62	—	kHz
<b>Minimum insertion attenuation</b> (including losses in the matching network without loss of the balun)	$\alpha_{\min}$	—	4,8	6,0	dB
<b>Group delay ripple (p-p)</b> $f_N - 13,0 \text{ kHz} \dots f_N + 13,0 \text{ kHz}$	$\Delta\tau$	—	2,0	10,0	$\mu\text{s}$
<b>Relative attenuation (relative to <math>\alpha_{\min}</math>)</b>	$\alpha_{\text{rel}}$				
$f_N - 11,0 \text{ kHz}$		—	0,5	5	dB
$f_N + 11,0 \text{ kHz}$		—	0,5	5	dB
$f_N - 120,0 \text{ kHz} \dots f_N - 60,0 \text{ kHz}$		8	30	—	dB
$f_N + 60,0 \text{ kHz} \dots f_N + 120,0 \text{ kHz}$		8	24	—	dB
$f_N \pm 120,0 \text{ kHz} \dots f_N \pm 130,0 \text{ kHz}$		40	50	—	dB
$f_N \pm 130,0 \text{ kHz} \dots f_N \pm 360,0 \text{ kHz}$		42	55	—	dB
$f_N \pm 360,0 \text{ kHz} \dots f_N \pm 1,4 \text{ MHz}$		40	60	—	dB
<b>Impedance within the passband</b>					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	410 $\parallel$ 0,4	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	410 $\parallel$ 0,4	—	$\Omega \parallel \text{pF}$
<b>Temperature coefficient of frequency <sup>1)</sup></b>	$TC_f$	—	-0,036	—	ppm/K <sup>2</sup>
<b>Turnover temperature</b>	$T_0$	—	25	—	$^{\circ}\text{C}$

<sup>1)</sup> Temperature dependance of  $f_c$ :  $f_c(T) = f_c(T_0)(1 + TC_f(T - T_0)^2)$



## SAW Components

B4864

## Low Loss Filter for Mobile Communication


183,60 MHz

### Data Sheet



#### Recommended pin configurations / test matching networks:

##### a) single-ended 50Ω / single-ended 50Ω

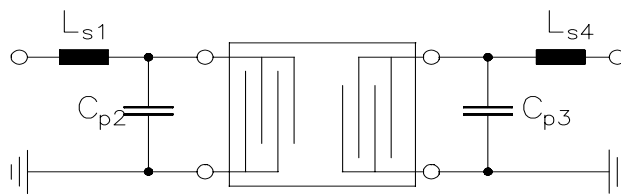

**Input :** Pin 10

**Output :** Pin 5


$L_{s1} = 100 \text{ nH}$

$C_{p2} = 3,9 \text{ pF}$

$C_{p3} = 3,9 \text{ pF}$

$L_{s4} = 100 \text{ nH}$

##### b) single-ended 50Ω / balanced 50Ω

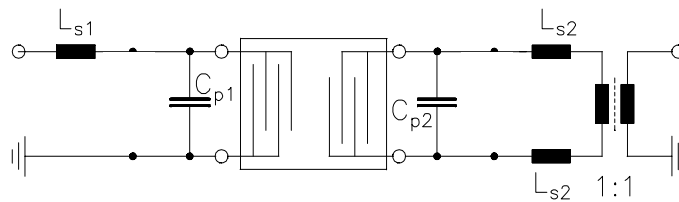

**Input :** Pin 10

**Output :** Pins 5 and 4

$L_{s1} = 100 \text{ nH}$

$C_{p1} = 3,9 \text{ pF}$

$C_{p2} = 3,9 \text{ pF}$

$L_{s2} = 39 / 47 \text{ nH}$

#### Note :

The balanced network is realized using TOKO 1:1 balun B5FL. The insertion attenuation of a balun is 0.3 dB at 183.6 MHz. The loss of the balun is not included in the specified filter insertion attenuation.

The level of ultimate suppression may be limited by electromagnetic feedthrough depending on the layout of the pcb and the arrangement of the matching components.

The above mentioned characteristics can be realized either in balanced or in unbalanced mode of operation.



SAW Components

B4864


Low Loss Filter for Mobile Communication

183,60 MHz


Data Sheet



**Normalized transfer function passband** (measured single ended / single ended)

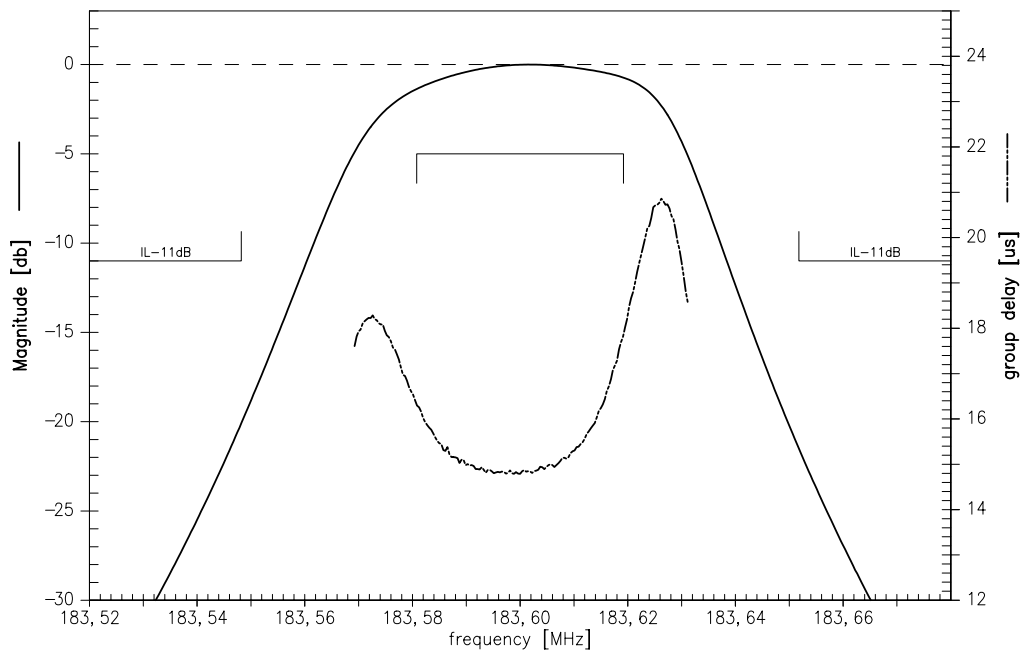

**Normalized transfer function wideband** (measured single ended / single ended)

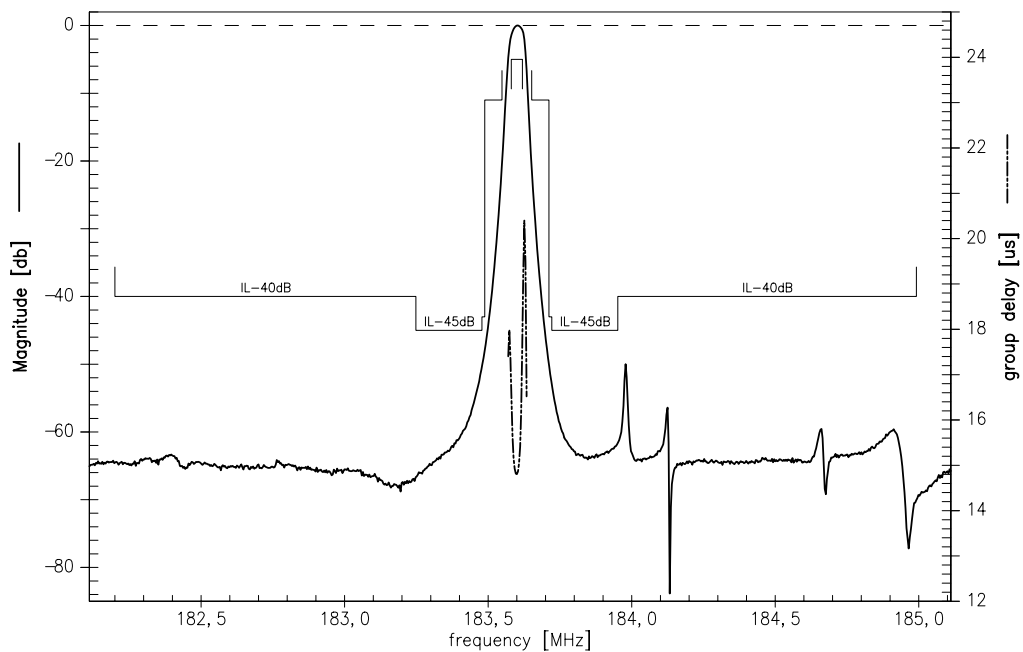



<b>SAW Components</b>	<b>B4864</b>
<b>Low Loss Filter for Mobile Communication</b>	<b>183,60 MHz</b>
<b>Data Sheet</b>	<b>SMD</b>

**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, OFW E MF**  
**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.