

NOTES:

1.0 SPECIFICATIONS:

1.1 FREQ. RANGE: DC to 12.4 GHz

1.2 ATTENUATION ACCURACY:

0dB	+0.3/-0dB
0.5 - 6dB	±0.3dB
7 - 20dB	±0.5dB
21 - 30dB	±1.0dB
31 - 40dB	±1.5dB

1.3 MAXIMUM VSWR: 1.07 + .015 f (GHz)

1.4 MAXIMUM INPUT POWER: 2 WATTS AVG
AT +25°C DERATED LINEARLY TO
0.5 WATTS AT +125°C


1.5 OPERATING TEMP. RANGE: -65°C to +125°C

2.0 MARKING

2.1 MARK UNIT AS SHOWN
(REF.: INK-03811-27-XX)

3.0 EPOXY UNIT AS SHOWN (REF.: EPX-08000-44-01)

4.0 DIMENSIONS IN PARENTHESIS ARE IN
MILLIMETERS.

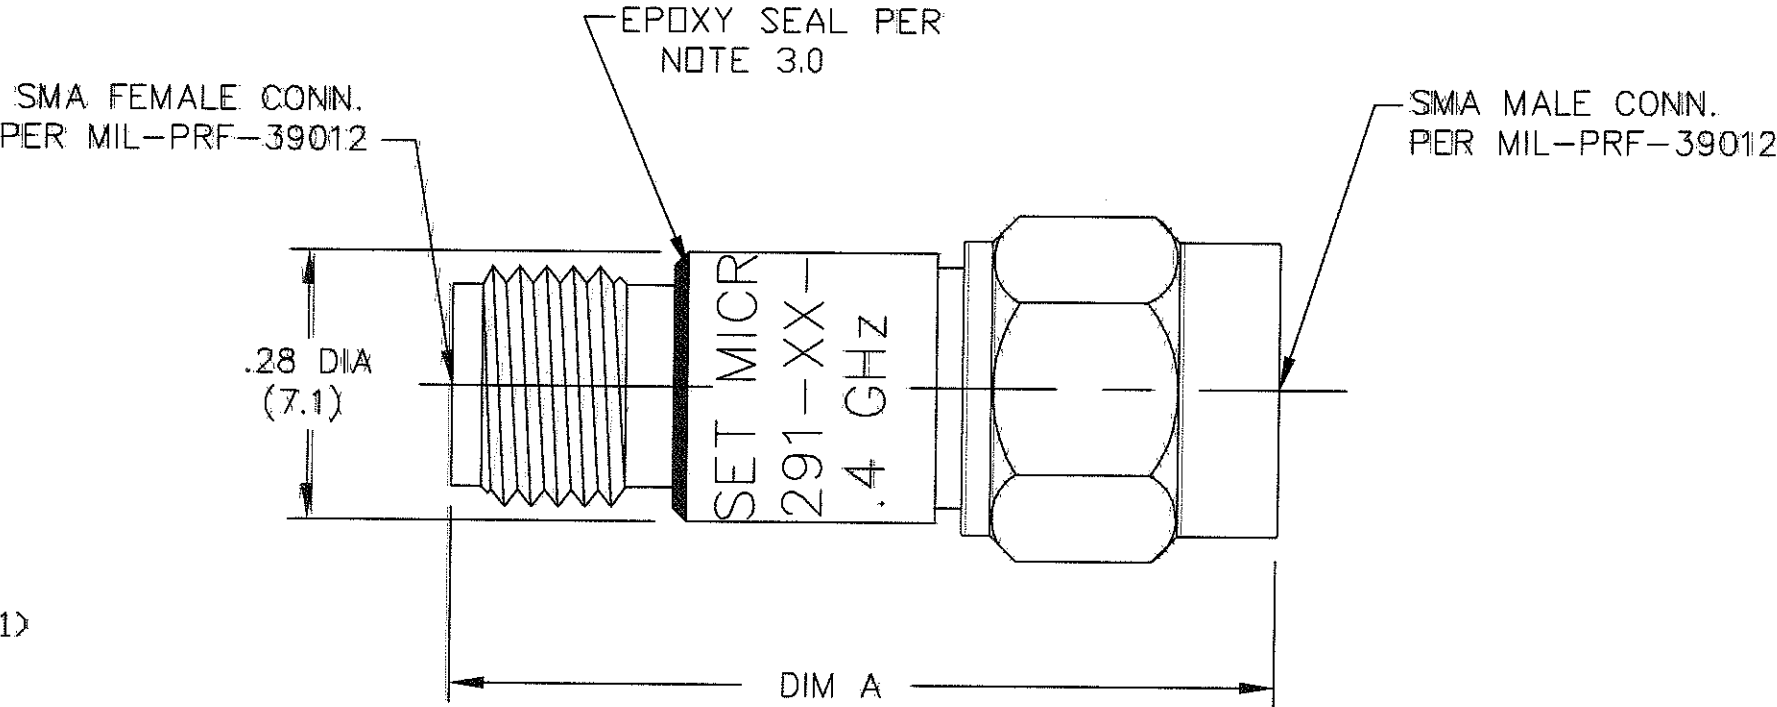

ATTENUATION VALUE	DIM A
0-12dB	.86(21.8)
13-30dB	1.02(25.9)
31-40dB	1.13(28.6)

SEE HISTORY FILE FOR REV. HISTORY

DWG NO. WAS: 02333-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	10/2/92
M	ECR 6933	1/26/90
M1	SHOW CORR. P/N	2/15/90
N	ECN 10832	9/3/91
Q	REDRAW ON CAD	9/29/92
P	ECN 17389	12/16/99
R	ECN 19049	2/24/03
S	ECN 21171	1/4/07

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS ±.005
2 PLACE DECIMALS ±.02
FRACTIONS ±1/64
PARALLELITY: T.I.R. _____
FLATNESS: T.I.R. _____
CONCENTRICITY: T.I.R. _____
ANGLES AND PERPENDICULARITY: ±1°

FSCM NO.
34078

MIDWEST MICROWAVE

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave.

TITLE
ATTENUATOR

DRAWN/DATE
A.BEATTY
9/29/92

ENG./DATE
G.KOZAK
10/1/92

CHECKED/DATE

APPROVED/DATE

DRAWING NUMBER
ATT-0291-XX-SMA-02

SCALE: 5=1

SHEET 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions:

[ATT-0291-15-SMA-02](#) [ATT-0291-20-SMA-02](#) [ATT-0291-30-SMA-02](#) [ATT-0291-05-SMA-02](#) [ATT-0291-06-SMA-02](#)
[ATT-0291-07-SMA-02](#) [ATT-0291-08-SMA-02](#) [ATT-0291-09-SMA-02](#) [ATT-0291-10-SMA-02](#) [ATT-0291-00-SMA-02](#)
[ATT-0291-01-SMA-02](#) [ATT-0291-02-SMA-02](#) [ATT-0291-03-SMA-02](#) [ATT-0291-04-SMA-02](#)