


## IB ST 24 AO 4/SF

Order No.: 2754312

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2754312>

INTERBUS-ST analog output module, D/A resolution 13 bit, 4 outputs, 0 - 20 mA, 0 - 10 V, consisting of: Terminal part with screw connection and module electronics

### Commercial data

GTIN (EAN)	 4 017918 063078
sales group	K402
Pack	1 pcs.
Customs tariff	85389091
Catalog page information	Page 239 (AX-2011)

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Product description

INTERBUS ST analog output modules

These INTERBUS analog output modules can be used to connect all actuators which work with the standardized voltage or current ranges 0-10 V or 0 (4) - 20 mA or -10 V to +10 V.

- Both signals are made available simultaneously for all channels, so that "current" and "voltage" actuators can be mixed.
- All commercially available actuators can be connected without additional interconnecting terminals.
- Diagnostic LEDs provide information on the operating status at any time.
- All modules can be individually labeled on the large pull-out labeling field. The insert cards can be prepared by hand, or by plotter or printer.

- In the event of failure or malfunction, the electronics of the module can be easily replaced. The passive termination block remains mounted on the rail. This means that the replacement process can be carried out in a just a few seconds and without the need for tools.

- The fuses are accessible from outside, so that a fault can be cleared quickly.
- The connection to protective earth ground is made directly via the DIN rail.
- The conventional labeling materials (Zack strip ZB-6, etc.) can be used to label the termination blocks.

## Technical data

### Interfaces

Interface	ST local bus
Connection method	ST local bus connector

### Power supply

Communications power $U_L$	9 V DC (from the ST local bus)
Typical current consumption	100 mA (from the ST local bus)
Max. current consumption	130 mA (from the ST local bus)
I/O voltage	24 V DC
Peripherals voltage range	18.5 V DC ... 30.5 V DC
Residual ripple	$\pm 1.2$ V

### Electrical isolation

Test section	Bus/Outputs 500 V AC 50 Hz 1 min
	Supply voltage/Outputs 500 V AC 50 Hz 1 min
	Supply voltage/Ground conductor 500 V AC 50 Hz 1 min
	I/O voltage/Ground conductor 500 V AC 50 Hz 1 min

### Outputs

No. of channels	4
Connection method	2-wire
	Screw connection
Current output signal	0 A ... 20 mA
Load/output load current output	< 500 $\Omega$
Quantization current output	4.88 $\mu$ A
Basic error limit	0.1 %
Voltage output signal	0 V ... 10 V (max. 5 mA)
Load/output load voltage output	> 2 k $\Omega$
Voltage output quantization	2.44 mV

Basic error limit	0.05 %
Representation of output values	16 bit complement on two
	16 bit complement on two
Transmission of output values from the control system	All channels simultaneously
	All channels simultaneously
DAC resolution	12 Bit
	12 Bit
Process data update	1 ms (incl. slew rate)
	1 ms (incl. slew rate)

**General data**

Weight	600 g
Width	118 mm
Height	117 mm
Length	116 mm

**Certificates / Approvals**



Certification CUL, GOST, UL

**Accessories**

Item	Designation	Description
<b>Bridges</b>		
2836269	EB 84 IB ST BU	Insertion bridges, divisible, isolated comb spine, color blue, 84-pos.
2836272	EB 84 IB ST RD	Insertion bridges, divisible, isolated comb spine, color red, 84-pos.
<b>Cable/conductor</b>		
2836492	IB ST LBC	Spare local bus cable, for INTERBUS-ST modules
<b>Fuse</b>		
2753478	IBS TR5 0,4AT	Replacement fuse, for INTERBUS-ST modules

**Replacement module electronics**


2754354

IB STME 24 AO 4/SF


Replacement module electronics for IB ST (ZF) 24 AO 4/SF

**Diagrams/Drawings**

Connection diagram

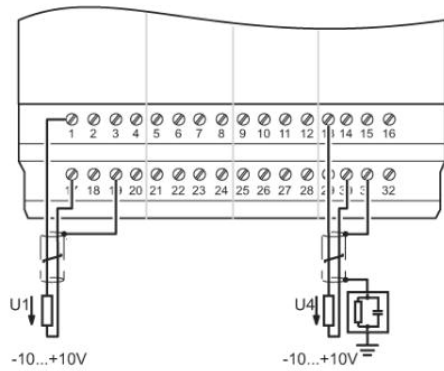

Dimensioned drawing

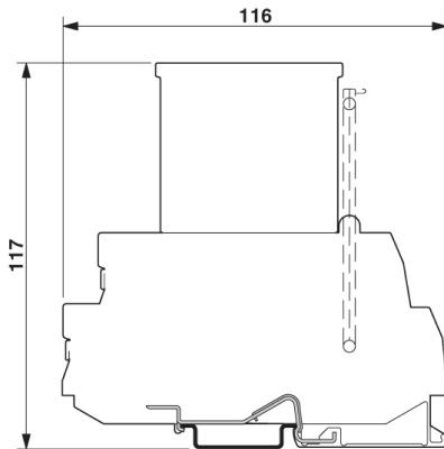

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;