


BNC MALE CONNECTOR
PER MIL-STD-348
FIGURE 301-1

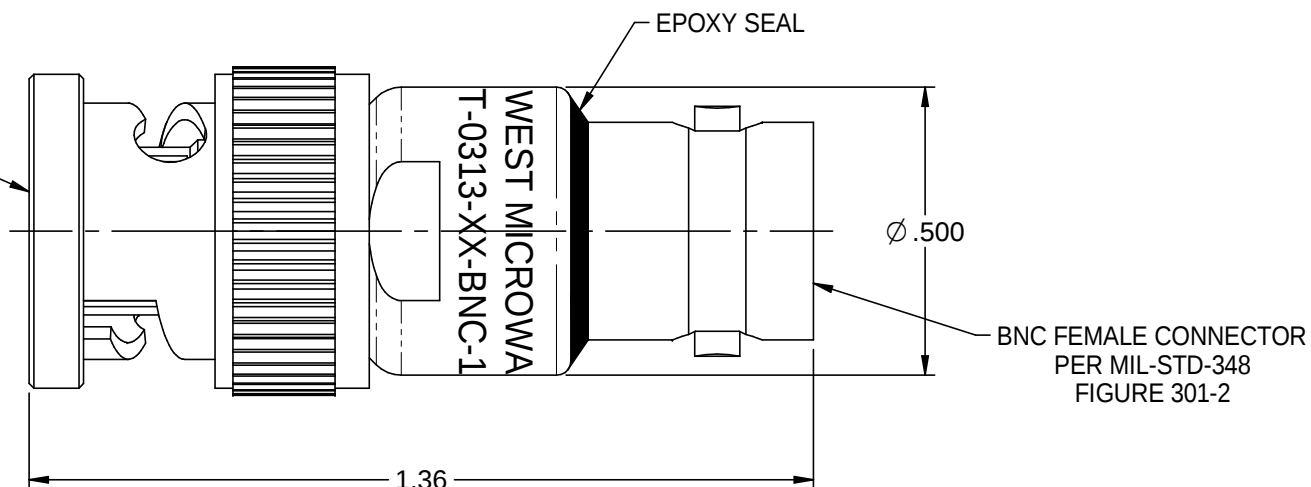

BNC FEMALE CONNECTOR
PER MIL-STD-348
FIGURE 301-2

NOTES: UNLESS OTHERWISE SPECIFIED.

1. SPECIFICATIONS:

1.1 FREQUENCY RANGE: DC TO 4.0 GHz

1.2 ATTENUATION & ACCURACY:

0 dB: +0.3/-0 dB

1-6 dB: ± 0.3 dB

7-20 dB: ± 0.5 dB

21-30 dB: ± 0.8 dB

1.3 IMPEDANCE: 50 OHM


1.4 VSWR (MAX): 1.25:1

1.5 MAXIMUM INPUT POWER: 2 WATTS AVG. AT 25°C

DERATED LINEARLY TO 0.5 WATTS AT 125°C

1.6 OPERATING TEMP. RANGE: -55°C TO 125°C

1.7 FINISH: NICKEL PLATED BRASS.

 EMERSON Network Power Connectivity Solutions This PROPRIETARY Document is property of Emerson Network Power. Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	3RD ANGLE PROJECTION  RoHS ☒ 2002/95/EC UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX $\pm .02$.XXX $\pm .005$ ANGLES $\pm 2^\circ$	Midwest Microwave Title: BNC ATTENUATOR, 0-30 dB		
		Model No.	ATT-0313-XX-BNC-10	
	Size A	DO NOT SCALE DRAWING	Date: 5/8/2013	Sheet 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions:

[ATT-0313-00-BNC-10](#) [ATT-0313-01-BNC-10](#) [ATT-0313-02-BNC-10](#) [ATT-0313-03-BNC-10](#) [ATT-0313-10-BNC-10](#)
[ATT-0313-15-BNC-10](#) [ATT-0313-20-BNC-10](#) [ATT-0313-30-BNC-10](#) [ATT-0313-04-BNC-10](#) [ATT-0313-05-BNC-10](#)
[ATT-0313-06-BNC-10](#) [ATT-0313-07-BNC-10](#) [ATT-0313-08-BNC-10](#) [ATT-0313-09-BNC-10](#)