

MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7, -5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

DESCRIPTION

This is a family of 262144-word by 16-bit dynamic RAMs with Hyper Page mode function, fabricated with the high performance CMOS process, and is ideal for the buffer memory systems of personal computer graphics and HDD where high speed, low power dissipation, and low costs are essential.

The use of double-layer metalization process technology and a single-transistor dynamic storage stacked capacitor cell provide high circuit density at reduced costs. Multiplexed address inputs permit both a reduction in pins and an increase in system densities. Self or extended refresh current is low enough for battery back-up application.

This device has $2\overline{CAS}$ and $1\overline{W}$ terminals with a refresh cycle of 512 cycles every 8.2ms.

FEATURES

Type name	RAS access time (max.ns)	CAS access time (max.ns)	Address access time (max.ns)	OE access time (max.ns)	Cycle time (min.ns)	Power dissipation (typ.mW)
M5M44265CXX-5,-5S	50	13	25	13	90	625
M5M44265CXX-6,-6S	60	15	30	15	110	550
M5M44265CXX-7,-7S	70	20	35	20	130	475

XX=J,TP

- Standard 40pin SOJ, 44 pin TSOP (II)
- Single $5V \pm 10\%$ supply
- Low stand-by power dissipation
 - CMOS Input level 5.5mW (Max)
 - CMOS Input level $550\mu W$ (Max)*
- Operating power dissipation
 - M5M44265Cxx-5,-5S 688mW (Max)
 - M5M44265Cxx-6,-6S 605mW (Max)
 - M5M44265Cxx-7,-7S 523mW (Max)
- Self refresh capability*
 - Self refresh current $150\mu A$ (Max)
- Extended refresh capability
 - Extended refresh current $150\mu A$ (Max)
- Hyper-page mode (512-column random access), Read-modify-write, $\overline{RAS}$ -only refresh, $\overline{CAS}$ before $\overline{RAS}$ refresh, Hidden refresh capabilities.
- Early-write mode, $\overline{OE}$ and $\overline{W}$ to control output buffer impedance
- 512 refresh cycles every 8.2ms (A_0 ~ A_8)
- 512 refresh cycles every 128ms (A_0 ~ A_8)*
- Byte or word control for Read/Write operation ($2\overline{CAS}$, $1\overline{W}$ type)
 - * : Applicable to self refresh version (M5M44265CJ,TP-5S,-6S,-7S : option) only


APPLICATION

Microcomputer memory, Refresh memory for CRT, Frame Buffer memory for CRT


PIN DESCRIPTION

Pin name	Function
A_0 ~ A_8	Address inputs
DQ_1 ~ DQ_{16}	Data inputs / outputs
$\overline{RAS}$	Row address strobe input
$\overline{LCAS}$	Lower byte control column address strobe input
$\overline{UCAS}$	Upper byte control column address strobe input
$\overline{W}$	Write control input
$\overline{OE}$	Output enable input
V_{CC}	Power supply (+5V)
V_{SS}	Ground (0V)

PIN CONFIGURATION (TOP VIEW)

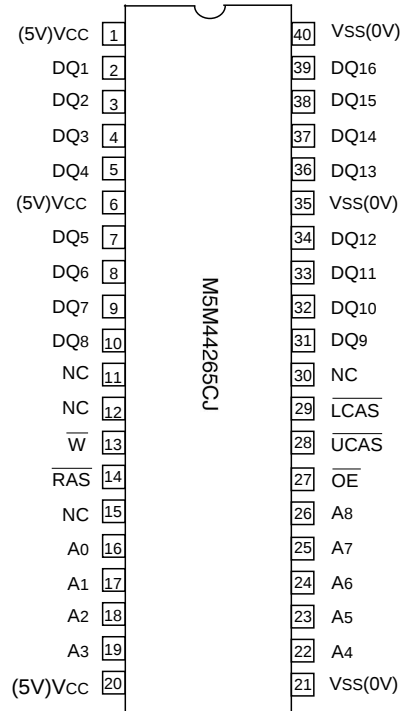

Outline 40P0K (400mil SOJ)

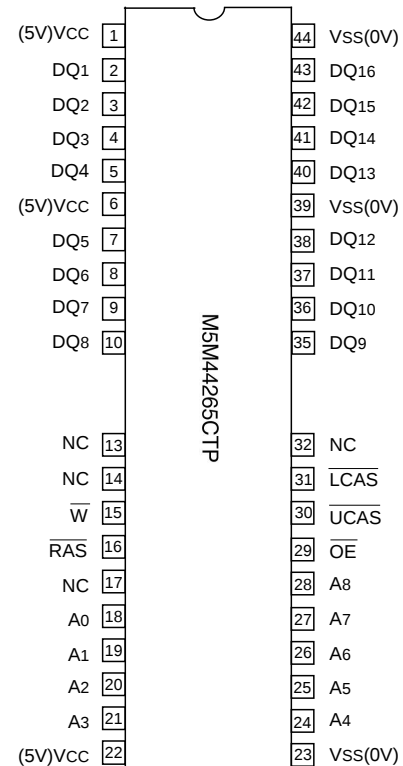

Outline 44P3W-R (400mil TSOP Nomal Bend)

NC: NO CONNECTION

MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

FUNCTION


In addition to Hyper page mode, normal read, write and read-modify-write operations the M5M44265CJ, TP provides a number

of other functions, e.g., $\overline{\text{RAS}}$ -only refresh and delayed-write. The input conditions for each are shown in Table 1.

Table 1 Input conditions for each mode

Operation	Inputs					Input/Output	
	RAS	LCAS	UCAS	$\overline{\text{W}}$	$\overline{\text{OE}}$	DQ1~DQ8	DQ9~DQ16
Lower byte read	ACT	ACT	NAC	NAC	ACT	DoUT	OPN
Upper byte read	ACT	NAC	ACT	NAC	ACT	OPN	DoUT
Word read	ACT	ACT	ACT	NAC	ACT	DoUT	DoUT
Lower byte write	ACT	ACT	NAC	ACT	NAC	DiN	DNC
Upper byte write	ACT	NAC	ACT	ACT	NAC	DNC	DiN
Word write	ACT	ACT	ACT	ACT	NAC	DiN	DiN
RAS only refresh	ACT	NAC	NAC	DNC	DNC	OPN	OPN
Hidden refresh	ACT	ACT	ACT	NAC	ACT	DoUT	DoUT
CAS before RAS (Extended*) refresh	ACT	ACT	ACT	DNC	DNC	OPN	OPN
Self refresh*	ACT	ACT	ACT	DNC	DNC	OPN	OPN
Stand-by	NAC	DNC	DNC	DNC	DNC	OPN	OPN

Note : ACT : active, NAC : nonactive, DNC : don't care, OPN : open

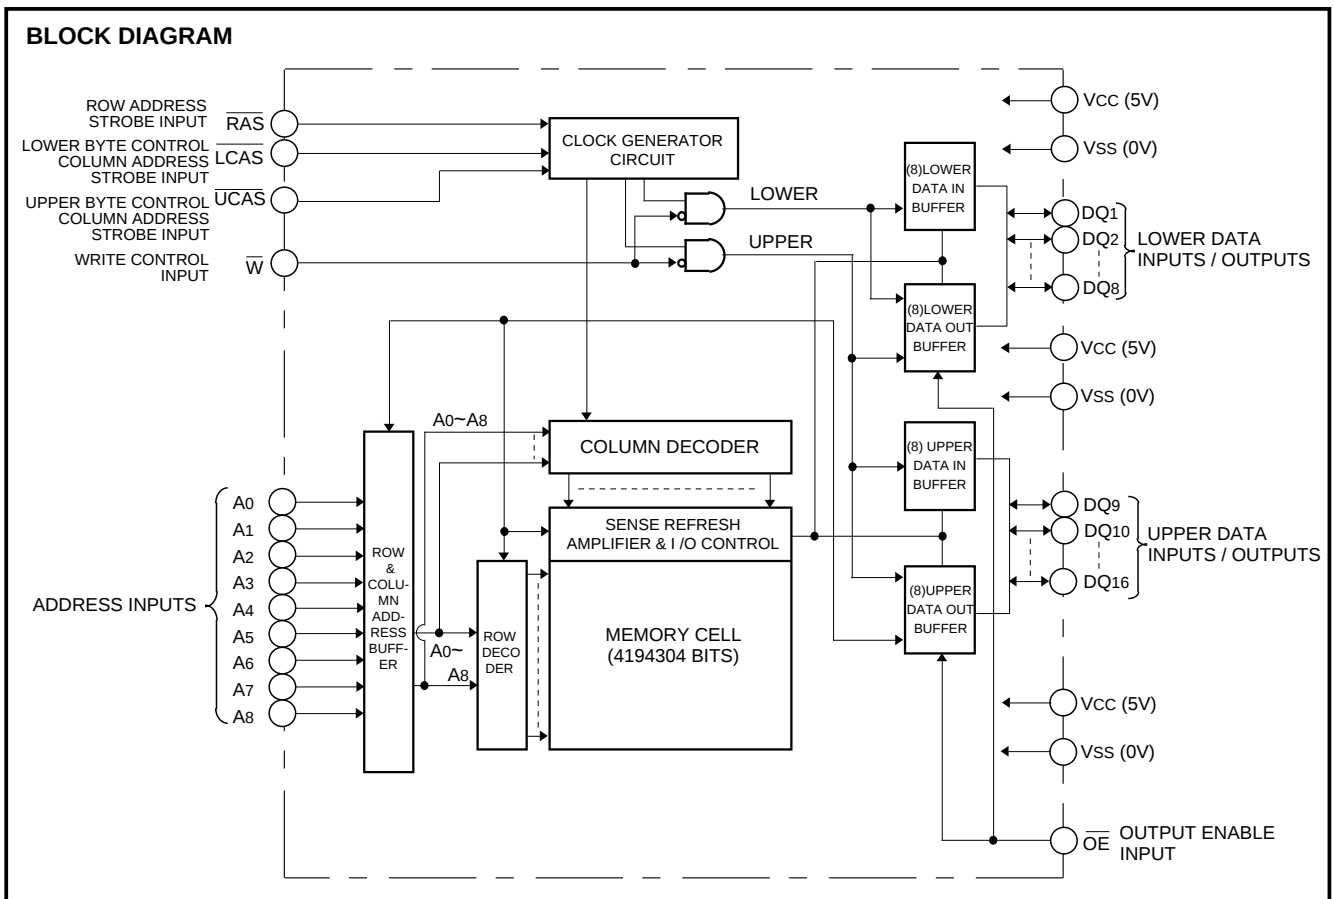

MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Conditions	Ratings	Unit
V _{CC}	Supply voltage	With respect to V _{SS}	-1~7	V
V _I	Input voltage		-1~7	V
V _O	Output voltage		-1~7	V
I _O	Output current		50	mA
P _d	Power dissipation	T _a =25 °C	1000	mW
T _{opr}	Operating temperature		0~70	°C
T _{stg}	Storage temperature		-65~150	°C

RECOMMENDED OPERATING CONDITIONS (T_a=0~70°C, unless otherwise noted) (Note 1)

Symbol	Parameter	Limits			Unit
		Min	Nom	Max	
V _{CC}	Supply voltage	4.5	5.0	5.5	V
V _{SS}	Supply voltage	0	0	0	V
V _{IH}	High-level input voltage, all inputs	2.4		6.0	V
V _{IL}	Low-level input voltage, all inputs	-0.5**		0.8	V

Note 1 : All voltage values are with respect to V_{SS}.

* * : V_{IL}(min) is -2.0V when pulse width is less than 25ns. (Pulse width is with respect to V_{SS}.)

ELECTRICAL CHARACTERISTICS (T_a=0~70°C, V_{CC}=5V±10%, V_{SS}=0V, unless otherwise noted) (Note 2)

Symbol	Parameter		Test conditions	Limits			Unit
				Min	Typ	Max	
V _{OH}	High-level output voltage		I _{OH} =-2mA	2.4		V _{CC}	V
V _{OL}	Low-level output voltage		I _{OL} =2mA	0		0.4	V
I _{OZ}	Off-state output current		Q floating 0V ≤ V _{OUT} ≤ 5.5V	-10		10	μA
I _I	Input current		0V ≤ V _{IN} ≤ +6.0V, Other inputs pins=0V	-10		10	μA
I _{CC1} (AV)	Average supply current from V _{CC} , operating (Note 3,4,5)	M5M44265C-5,-5S	RAS, CAS cycling trc=twc=min. output open			125	mA
		M5M44265C-6,-6S				110	
		M5M44265C-7,-7S				95	
I _{CC2}	Supply current from V _{CC} , stand-by (Note 6)		RAS= CAS =V _{IH} , output open			2	mA
			RAS= CAS ≥ V _{CC} -0.5V output open			1.0	
						0.1*	
I _{CC3} (AV)	Average supply current from V _{CC} , RAS only refresh mode (Note 3,5)	M5M44265C-5,-5S	RAS cycling, CAS=V _{IH} trc=min. output open			125	mA
		M5M44265C-6,-6S				110	
		M5M44265C-7,-7S				95	
I _{CC4} (AV)	Average supply current from V _{CC} Hyper page mode (Note 3,4,5)	M5M44265C-5,-5S	RAS=V _{IL} , CAS cycling tpc=min. output open			125	mA
		M5M44265C-6,-6S				110	
		M5M44265C-7,-7S				95	
I _{CC6} (AV)	Average supply current from V _{CC} CAS before RAS refresh mode (Note 3,5)	M5M44265C-5,-5S	CAS before RAS refresh cycling trc=min. output open			115	mA
		M5M44265C-6,-6S				100	
		M5M44265C-7,-7S				85	
I _{CC8} (AV)*	Average supply current from V _{CC} Extended-refresh mode (Note 6)		RAS cycling CAS ≤ 0.2V or CAS before RAS refresh cycling RAS ≤ 0.2V or ≥ V _{CC} -0.2V CAS ≤ 0.2V or ≥ V _{CC} -0.2V W ≤ 0.2V or ≥ V _{CC} -0.2V OE ≤ 0.2V or ≥ V _{CC} -0.2V A ₀ ~A ₈ ≤ 0.2V or ≥ V _{CC} -0.2V DQ=open trc=250μs, tras=tras min~1μs			150	μA
I _{CC9} (AV)*	Average supply current from V _{CC} Self-refresh mode (Note 6)		RAS=CAS ≤ 0.2V output open			150	μA

Note 2: Current flowing into an IC is positive, out is negative.

3: I_{CC1} (AV), I_{CC3} (AV), I_{CC4} (AV), and I_{CC6} (AV) are dependent on cycle rate. Maximum current is measured at the fastest cycle rate.

4: I_{CC1} (AV) and I_{CC4} (AV) are dependent on output loading. Specified values are obtained with the output open.

5: Column Address can be changed once or less while RAS=V_{IL} and CAS=V_{IH}.

MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

CAPACITANCE (Ta=0~70°C, Vcc=5V±10%, Vss=0V, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
CI(A)	Input capacitance, address inputs	Vi=Vss f=1MHz Vi=25mVrms			5	pF
CI(CLK)	Input capacitance, clock inputs				7	pF
CI/O	Input/Output capacitance, data ports				7	pF

SWITCHING CHARACTERISTICS (Ta=0~70°C, Vcc=5V±10%, Vss=0V, unless otherwise noted, see notes 6,14,15)

Symbol	Parameter	Limits						Unit
		M5M44265C-5,-5S		M5M44265C-6,-6S		M5M44265C-7,-7S		
		Min	Max	Min	Max	Min	Max	
tCAC	Access time from $\overline{\text{CAS}}$ (Note 7,8)		13		15		20	ns
tRAC	Access time from $\overline{\text{RAS}}$ (Note 7,9)		50		60		70	ns
tAA	Column address access time (Note 7,10)		25		30		35	ns
tCPA	Access time from $\overline{\text{CAS}}$ precharge (Note 7,11)		28		33		38	ns
tOEA	Access time from $\overline{\text{OE}}$ (Note 7)		13		15		20	ns
tOHC	Output hold time from $\overline{\text{CAS}}$ (Note 13)	5		5		5		ns
tOHR	Output hold time from $\overline{\text{RAS}}$ (Note 13)	5		5		5		ns
tCLZ	Output low impedance time from $\overline{\text{CAS}}$ low (Note 7)	5		5		5		ns
tOEZ	Output disable time after $\overline{\text{OE}}$ high (Note 12)		13		15		20	ns
tWEZ	Output disable time after $\overline{\text{WE}}$ high (Note 12)		13		15		20	ns
tOFF	Output disable time after $\overline{\text{CAS}}$ high (Note 12,13)		13		15		20	ns
tREZ	Output disable time after $\overline{\text{RAS}}$ high (Note 12,13)		13		15		20	ns

Note 6: An initial pause of 500μs is required after power-up followed by a minimum of eight initialization cycles ($\overline{\text{RAS}}$ -only refresh or $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh cycles).

Note the $\overline{\text{RAS}}$ may be cycled during the initial pause. And 8 initialization cycles are required after prolonged periods (greater than 8.2ms) of $\overline{\text{RAS}}$ inactivity before proper device operation is achieved.

7: Measured with a load circuit equivalent to 1TTL and 50pF.

The reference levels for measuring of output signals are 2.0V(VOH) and 0.8V(VOL).

8: Assumes that $\text{trCD} \geq \text{trCD}(\text{max})$ and $\text{tASC} \geq \text{tASC}(\text{max})$ and $\text{tCP} \geq \text{tCP}(\text{max})$.

9: Assumes that $\text{trCD} \nless \text{trCD}(\text{max})$ and $\text{trAD} \nless \text{trAD}(\text{max})$. If trCD or trAD is greater than the maximum recommended value shown in this table, trAC will increase by amount that trCD exceeds the value shown.

10: Assumes that $\text{trAD} \geq \text{trAD}(\text{max})$ and $\text{tASC} \nless \text{tASC}(\text{max})$.

11: Assumes that $\text{tCP} \nless \text{tCP}(\text{max})$ and $\text{tASC} \geq \text{tASC}(\text{max})$.

12: $\text{tOEZ}(\text{max})$, $\text{tWEZ}(\text{max})$, $\text{tOFF}(\text{max})$ and $\text{tREZ}(\text{max})$ defines the time at which the output achieves the high impedance state ($\text{IOUT} \nless \pm 10\mu\text{A}$) and is not reference to $\text{VOH}(\text{min})$ or $\text{VOL}(\text{max})$.

13: Output is disabled after both $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ go to high.

MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

TIMING REQUIREMENTS (For Read, Write, Read-Modify-Write, Refresh and Hyper-Page Mode Cycles)

(Ta=0~70°C, Vcc=5V±10%, Vss=0V, unless otherwise noted, see notes 14,15)

Symbol	Parameter	Limits						Unit
		M5M44265C-5,-5S		M5M44265C-6,-6S		M5M44265C-7,-7S		
		Min	Max	Min	Max	Min	Max	
tREF	Refresh cycle time		8.2		8.2		8.2	ms
tREF	Refresh cycle time*		128		128		128	ms
trp	RAS high pulse width	30		40		50		ns
trCD	Delay time, RAS low to $\overline{\text{CAS}}$ low (Note 16)	18	32	20	38	20	42	ns
tCRP	Delay time, $\overline{\text{CAS}}$ high to $\overline{\text{RAS}}$ low	5		5		5		ns
trPC	Delay time, $\overline{\text{RAS}}$ high to $\overline{\text{CAS}}$ low	0		0		0		ns
tCPN	$\overline{\text{CAS}}$ high pulse width	8		10		13		ns
trAD	Column address delay time from $\overline{\text{RAS}}$ low (Note 17)	13	25	15	30	15	35	ns
tASR	Row address setup time before RAS low	0		0		0		ns
tASC	Column address setup time before CAS low (Note 18)	0	10	0	13	0	13	ns
trAH	Row address hold time after RAS low	8		10		10		ns
tCAH	Column address hold time after CAS low	8		10		10		ns
tdZC	Delay time, data to $\overline{\text{CAS}}$ low (Note 19)	0		0		0		ns
tdZO	Delay time, data to $\overline{\text{OE}}$ low (Note 19)	0		0		0		ns
trDD	Delay time, $\overline{\text{RAS}}$ high to data (Note 20)	13		15		20		ns
tcDD	Delay time, $\overline{\text{CAS}}$ high to data (Note 20)	13		15		20		ns
tODD	Delay time, $\overline{\text{OE}}$ high to data (Note 20)	13		15		20		ns
tT	Transition time (Note 21)	1	50	1	50	1	50	ns

Note 14: The timing requirements are assumed tT=2ns.

15: VIH(min) and VIL(max) are reference levels for measuring timing of input signals.

16: trCD(max) is specified as a reference point only. If trCD is less than trCD(max), access time is tRAC. If trCD is greater than trCD(max), access time is controlled exclusively by tCAC or tAA.

17: tRAD(max) is specified as a reference point only. If tRAD ≥ tRAD(max) and tASC ≤ tASC(max), access time is controlled exclusively by tAA.

18: tASC(max) is specified as a reference point only. If trCD ≥ trCD(max) and tASC ≥ tASC(max), access time is controlled exclusively by tCAC.

19: Either tdZC or tdZO must be satisfied.

20: Either trDD or tcDD or tODD must be satisfied.

21: tT is measured between VIH(min) and VIL(max).

Read and Refresh Cycles

Symbol	Parameter	Limits						Unit
		M5M44265C-5,-5S		M5M44265C-6,-6S		M5M44265C-7,-7S		
		Min	Max	Min	Max	Min	Max	
t _{RC}	Read cycle time	90		110		130		ns
t _{RA} S	RAS low pulse width	50	10000	60	10000	70	10000	ns
t _{CA} S	CAS low pulse width	8	10000	10	10000	13	10000	ns
t _{CS} H	CAS hold time after RAS low	40		48		55		ns
t _{RS} H	RAS hold time after CAS low	13		15		20		ns
t _{RC} S	Read setup time before CAS low	0		0		0		ns
t _{RC} H	Read hold time after CAS high (Note 22)	0		0		0		ns
t _{RR} H	Read hold time after RAS high (Note 22)	0		0		0		ns
t _{RA} L	Column address to RAS hold time	25		30		35		ns
t _{CA} L	Column address to CAS hold time	13		18		23		ns
t _{OR} H	RAS hold time after OE low	13		15		20		ns
t _{OC} H	CAS hold time after OE low	13		15		20		ns

Note 22: Either trCH or trRH must be satisfied for a read cycle.

MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Write Cycle (Early Write and Delayed Write)

Symbol	Parameter	Limits						Unit
		M5M44265C-5,-5S		M5M44265C-6,-6S		M5M44265C-7,-7S		
		Min	Max	Min	Max	Min	Max	
tWC	Write cycle time	90		110		130		ns
tRAS	RAS low pulse width	50	10000	60	10000	70	10000	ns
tCAS	CAS low pulse width	8	10000	10	10000	13	10000	ns
tCSH	CAS hold time after RAS low	40		48		55		ns
tRSH	RAS hold time after CAS low	13		15		20		ns
twCS	Write setup time before CAS low (Note 24)	0		0		0		ns
twCH	Write hold time after CAS low	8		10		13		ns
tcWL	CAS hold time after W low	8		10		13		ns
trWL	RAS hold time after W low	8		10		13		ns
tWP	Write pulse width	8		10		13		ns
tDS	Data setup time before CAS low or W low	0		0		0		ns
tDH	Data hold time after CAS low or W low	8		10		13		ns

Read-Write and Read-Modify-Write Cycles

Symbol	Parameter	Limits						Unit
		M5M44265C-5,-5S		M5M44265C-6,-6S		M5M44265C-7,-7S		
		Min	Max	Min	Max	Min	Max	
trWC	Read write/read modify write cycle time (Note 23)	109		133		161		ns
trAS	RAS low pulse width	75	10000	89	10000	107	10000	ns
tCAS	CAS low pulse width	38	10000	44	10000	57	10000	ns
tCSH	CAS hold time after RAS low	70		82		99		ns
trSH	RAS hold time after CAS low	38		44		57		ns
trCS	Read setup time before CAS low	0		0		0		ns
tcWD	Delay time, CAS low to W low (Note 24)	28		32		42		ns
trWD	Delay time, RAS low to W low (Note 24)	65		77		92		ns
tAWD	Delay time, address to W low (Note 24)	40		47		57		ns
toEH	OE hold time after W low	13		15		20		ns

Note 23: trWC is specified as trWC(min)=trAC(max)+tODD(min)+trWL(min)+trP(min)+4tT.

24: twCS, tcWD, trWD and tAWD are specified as reference points only. If twCS $\geq$ twCS(min) the cycle is an early write cycle and the DQ pins will remain high impedance throughout the entire cycle. If tcWD $\geq$ tcWD(min), trWD $\geq$ trWD(min), tAWD $\geq$ tAWD(min) and tcpWD $\geq$ tcpWD(min) (for Hyper page mode cycle only), the cycle is a read-modify-write cycle and the DQ will contain the data read from the selected address. If neither of the above condition (delayed write) of the DQ (at access time and until CAS or OE goes back to VIH) is indeterminate.

MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Hyper Page Mode Cycle

(Read, Early Write, Read-Write, Read-Modify-Write Cycle, Read Write Mix Cycle, Hi-Z control by $\overline{OE}$ or $\overline{W}$) (Note 25)

Symbol	Parameter	Limits						Unit
		M5M44265C-5,-5S		M5M44265C-6,-6S		M5M44265C-7,-7S		
		Min	Max	Min	Max	Min	Max	
tHPC	Hyper page mode read/write cycle time (Note 26)	20		25		30		ns
tHPRWC	Hyper page mode read write / read modify write cycle time	57		66		79		ns
tDOH	Output hold time from CAS low	5		5		5		ns
tRAS	RAS low pulse width for read or write cycle (Note 27)	65	100000	77	100000	92	100000	ns
tCP	CAS high pulse width (Note 28)	8	13	10	16	13	16	ns
tCPRH	RAS hold time after CAS precharge	28		33		38		ns
tCPWD	Delay time, CAS precharge to W low (Note 24)	43		50		60		ns
tCHOL	Hold time to maintain the data Hi-Z until CAS access	7		7		7		ns
tOEPE	OE pulse width (Hi-Z control)	7		7		7		ns
twPE	W pulse width (Hi-Z control)	7		7		7		ns
tHCWD	Delay time, CAS low to W low after read	28		32		42		ns
tHAWD	Delay time, Address to W low after read	40		47		57		ns
tHPWD	Delay time, CAS precharge to W low after read	43		50		60		ns
tHCOD	Delay time, CAS low to OE high after read	13		15		20		ns
tHAOD	Delay time, Address to OE high after read	25		30		35		ns
tHPOD	Delay time, CAS precharge to OE high after read	28		33		38		ns

Note 25: All previously specified timing requirements and switching characteristics are applicable to their respective Hyper page mode cycle.

26: tHPC(min) is specified in the case of read-only and early write-only in Hyper page mode.

27: tRAS(min) is specified as two cycles of $\overline{CAS}$ input are performed.

28: tCP(max) is specified as a reference point only.

$\overline{CAS}$ before $\overline{RAS}$ Refresh Cycle (Note 29)

Symbol	Parameter	Limits						Unit
		M5M44265C-5,-5S		M5M44265C-6,-6S		M5M44265C-7,-7S		
		Min	Max	Min	Max	Min	Max	
tCSR	CAS setup time before RAS low	5		5		5		ns
tCHR	CAS hold time after RAS low	10		10		15		ns
tCAS	CAS low pulse width	17		17		22		ns

Note 29: Eight or more $\overline{CAS}$ before $\overline{RAS}$ cycles instead of eight $\overline{RAS}$ cycles are necessary for proper operation of $\overline{CAS}$ before $\overline{RAS}$ refresh mode.

Self Refresh Cycle* (Note 30)


Symbol	Parameter	Limits						Unit
		M5M44265C-5,-5S		M5M44265C-6,-6S		M5M44265C-7,-7S		
		Min	Max	Min	Max	Min	Max	
t _{RASS}	CBR self refresh $\overline{RAS}$ low pulse width	100		100		100		μs
t _{RPS}	CBR self refresh $\overline{RAS}$ high precharge time	90		110		130		ns
t _{CHS}	CBR self refresh $\overline{CAS}$ hold time	-50		-50		-50		ns

MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Timing Diagrams (Note 31) Read Cycle

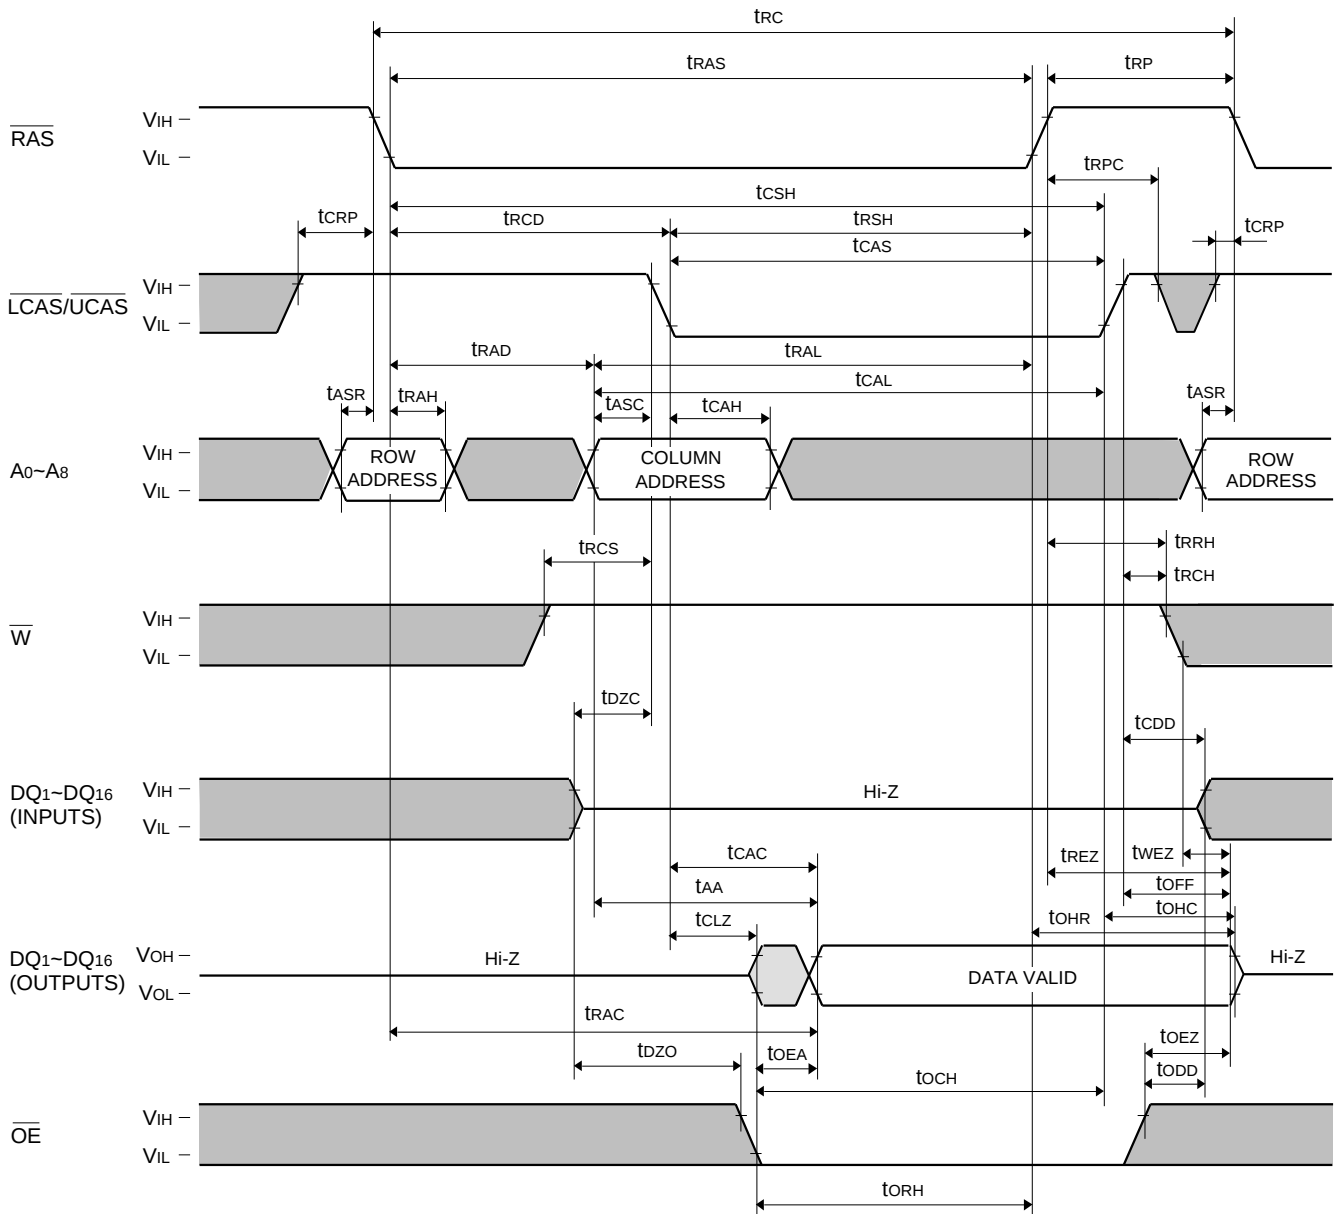

Note 31


- Indicates the don't care input.
 $V_{\text{IH}}(\text{min}) \leq V_{\text{IN}} \leq V_{\text{IH}}(\text{max})$ or $V_{\text{IL}}(\text{min}) \leq V_{\text{IN}} \leq V_{\text{IL}}(\text{max})$
- Indicates the invalid output.

MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Byte Read Cycle

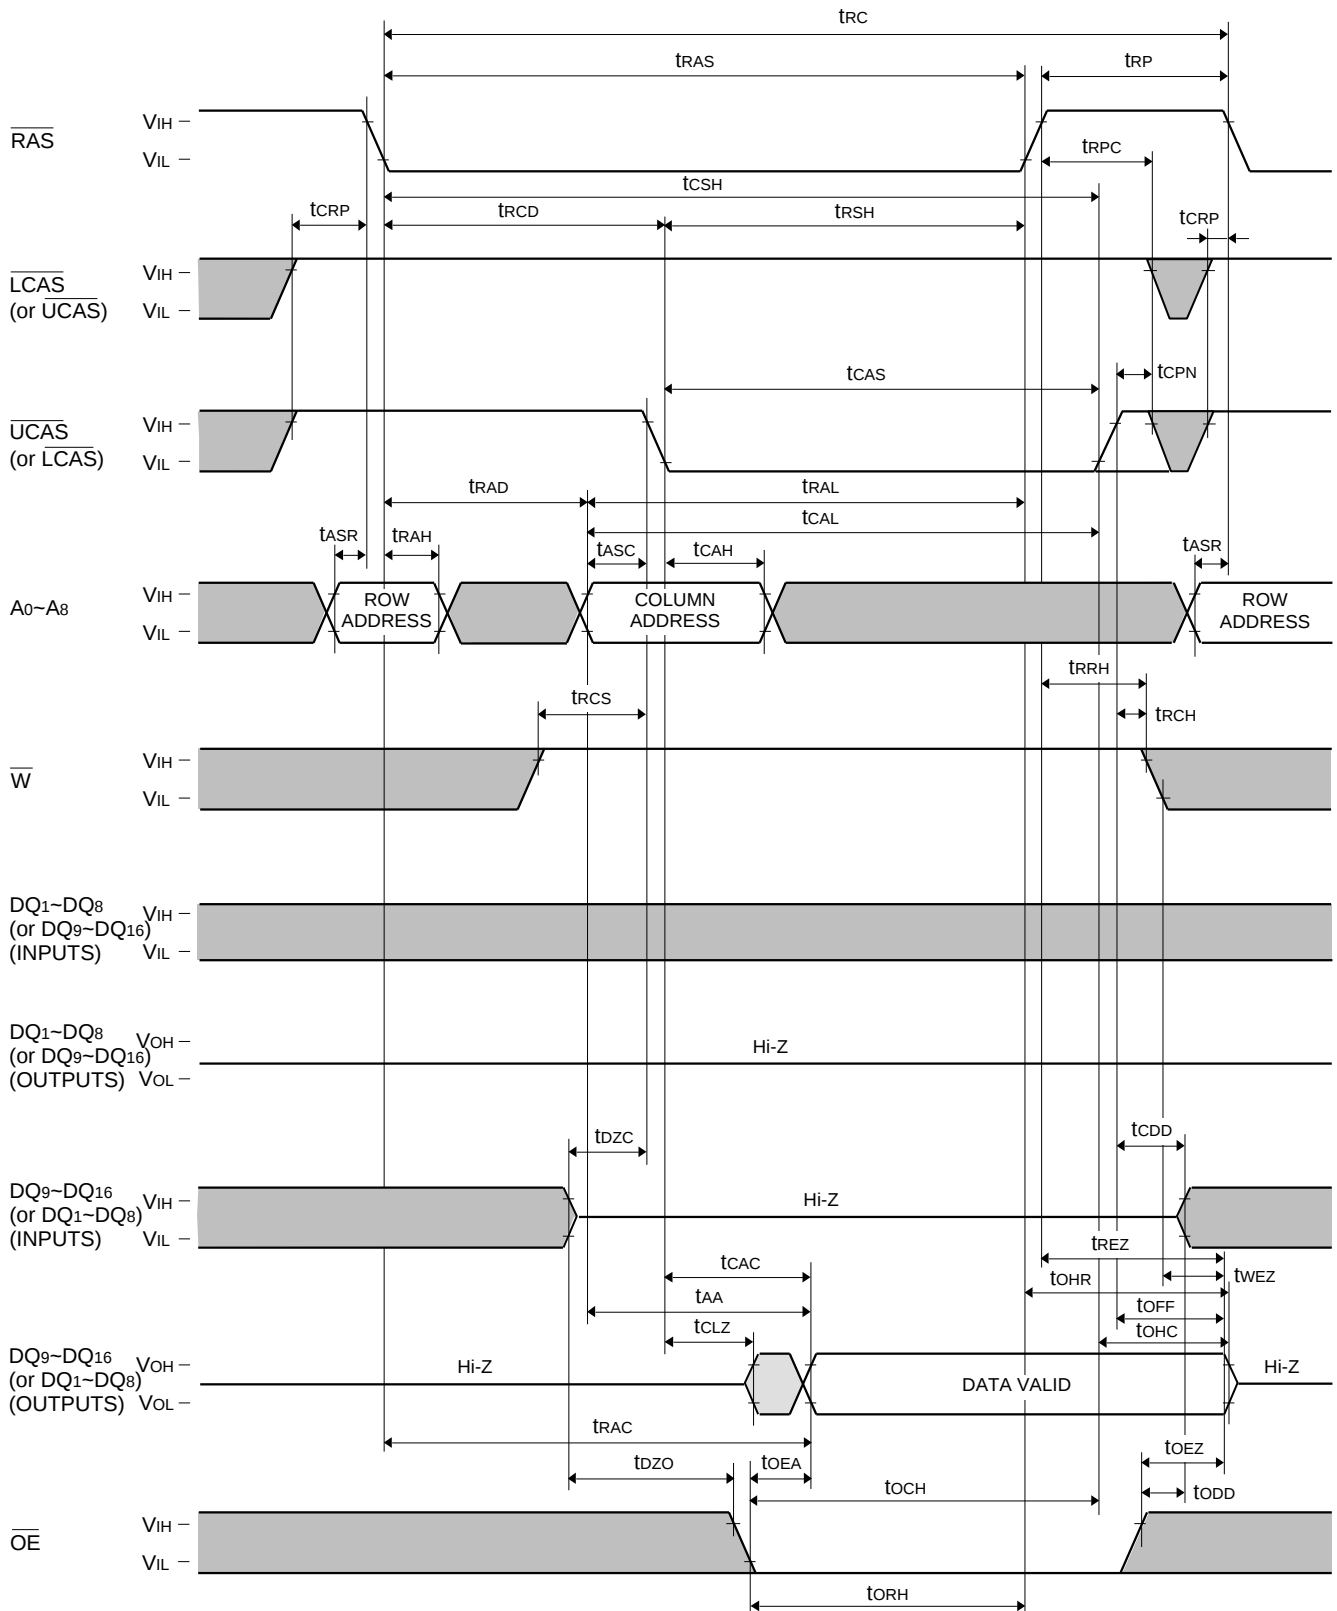


MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Early Write Cycle

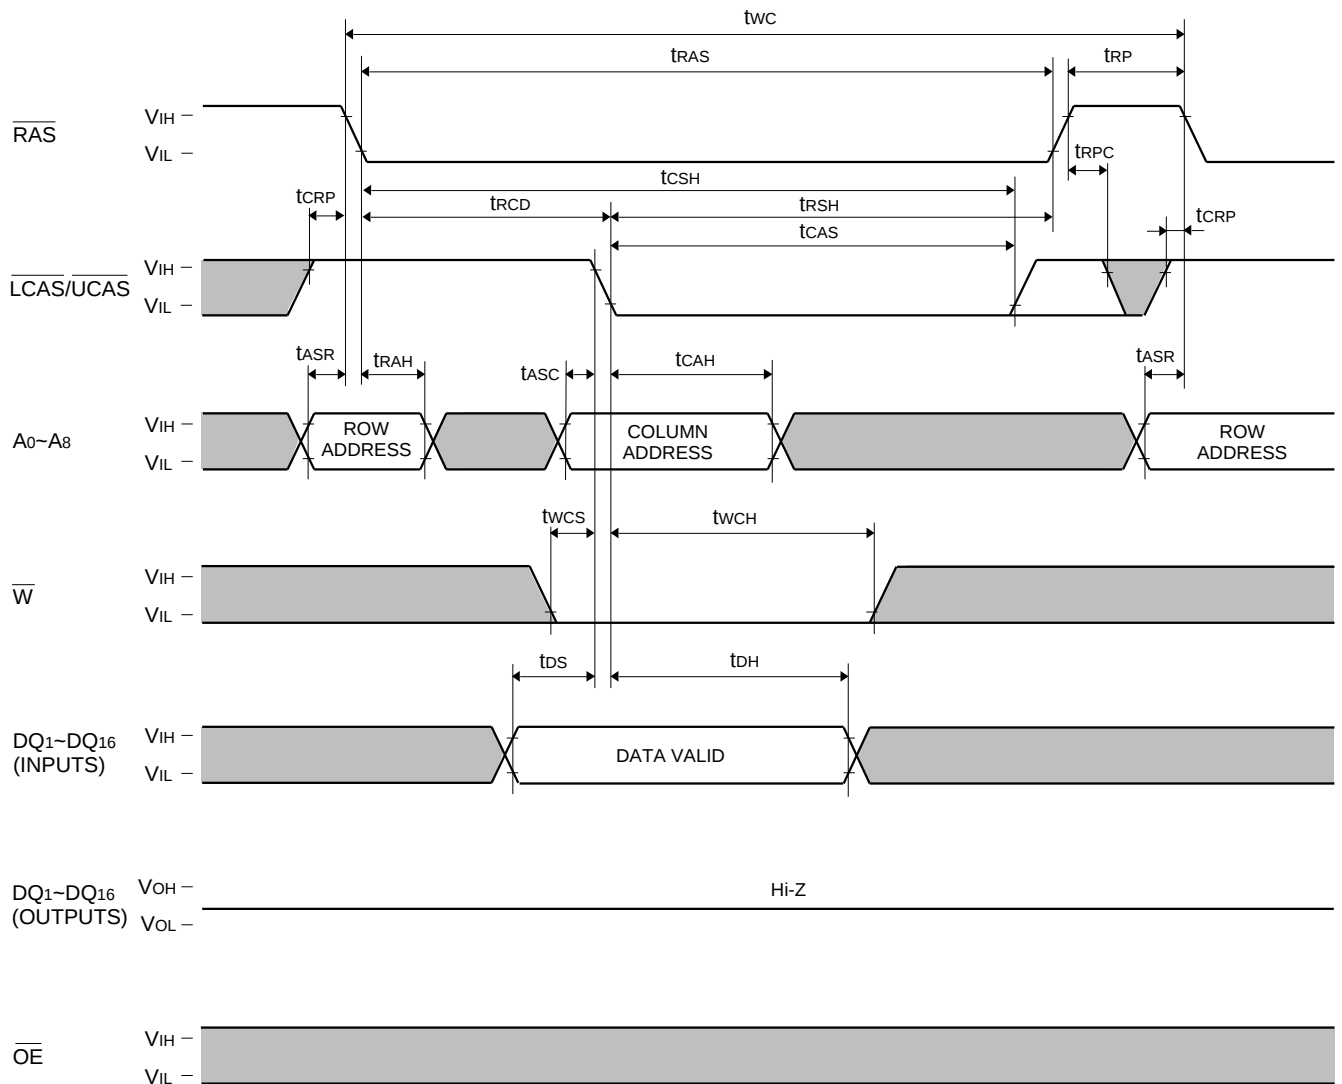


MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S


EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Byte Early Write Cycle

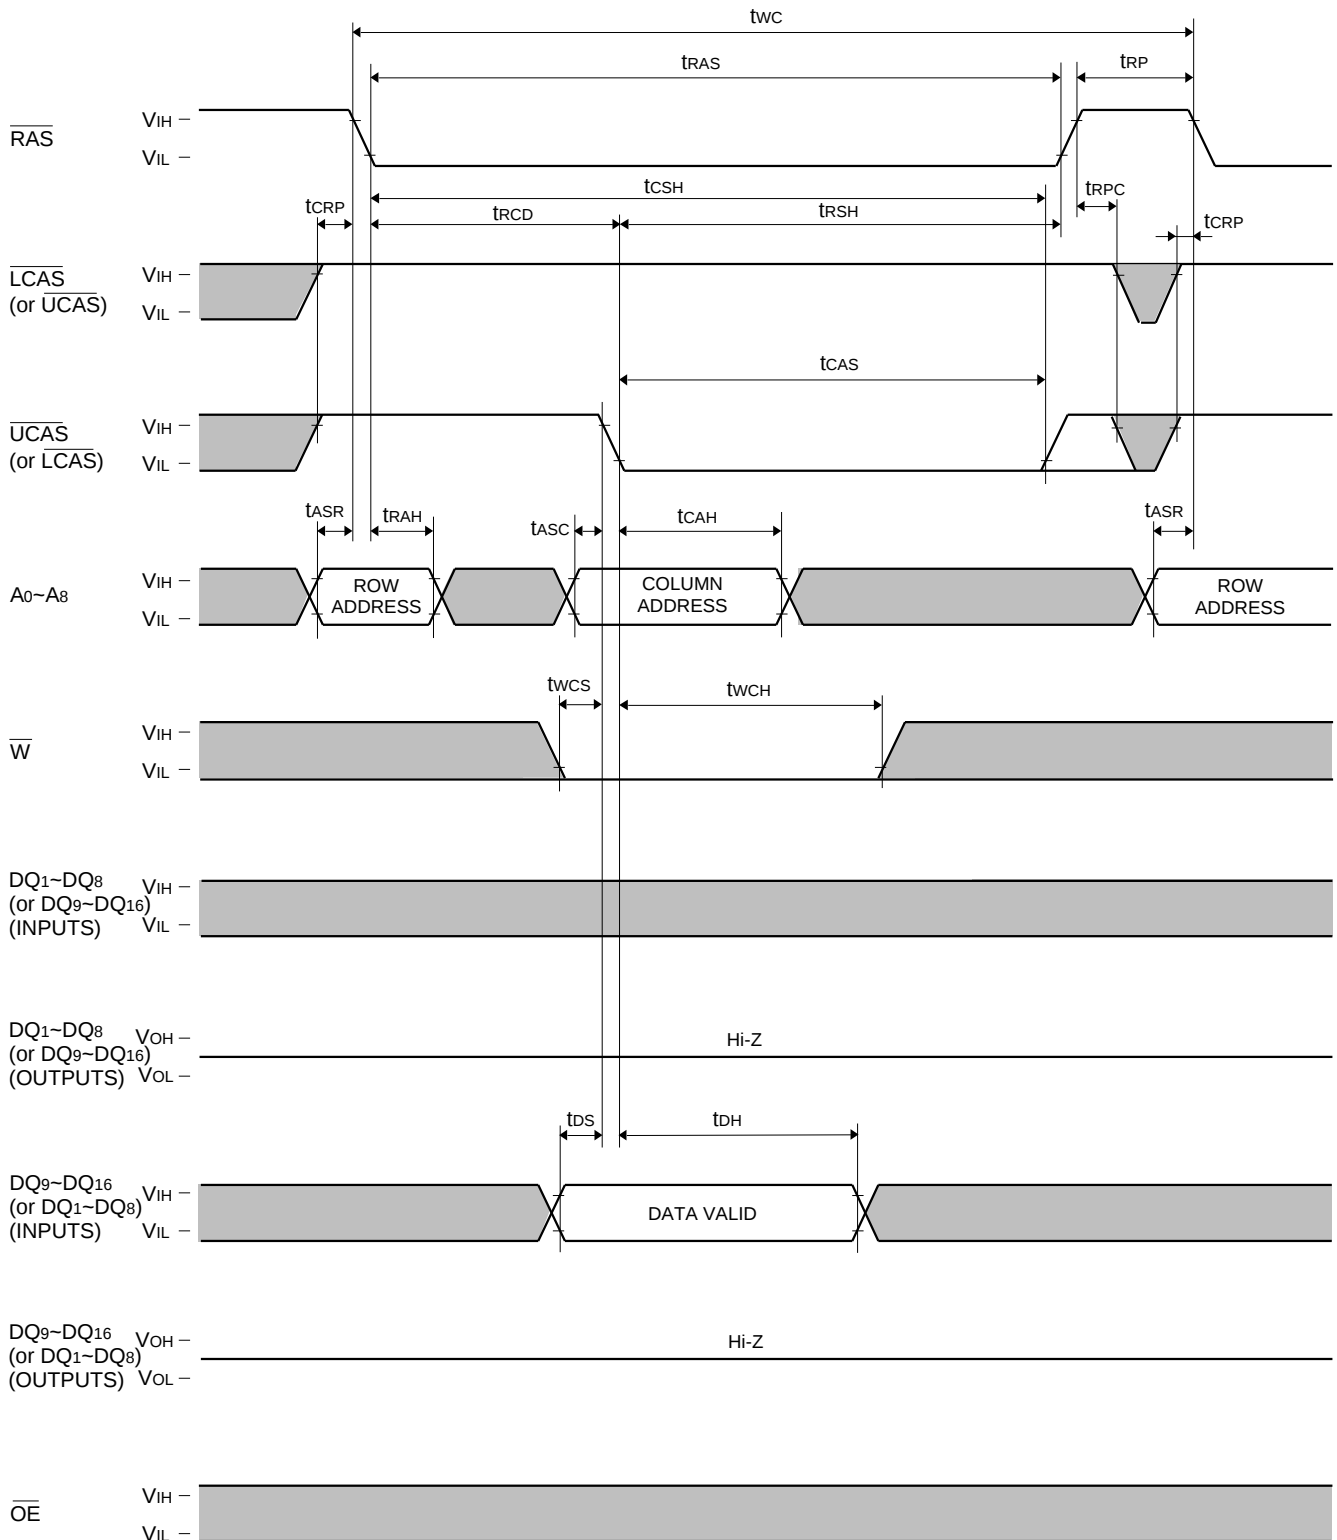

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Delayed Write Cycle

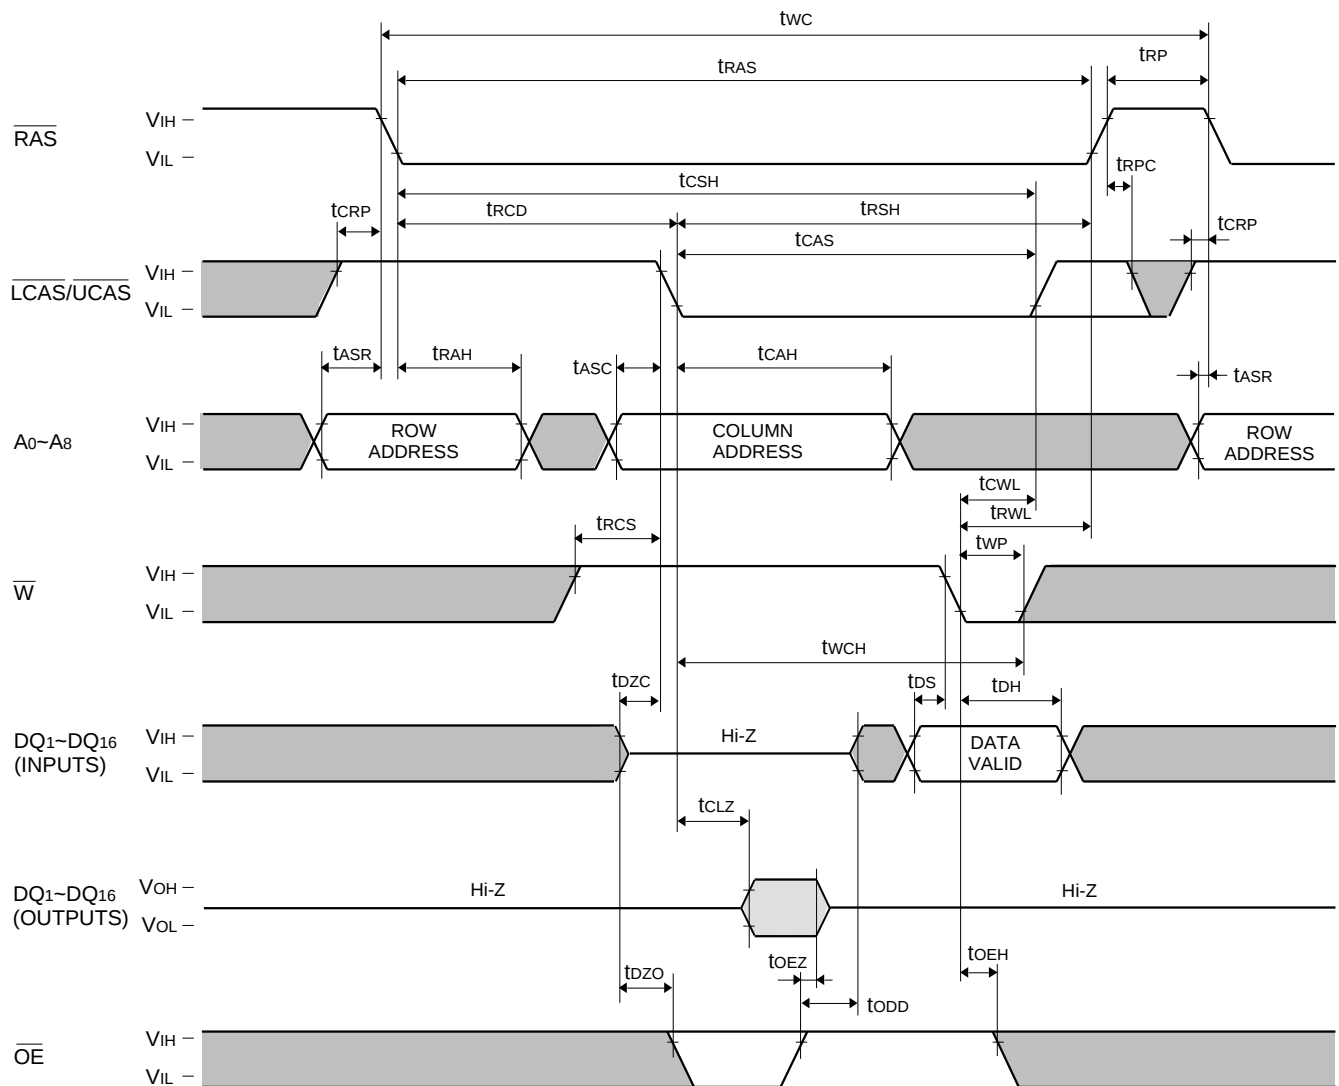


MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S


EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Byte Delayed Write Cycle

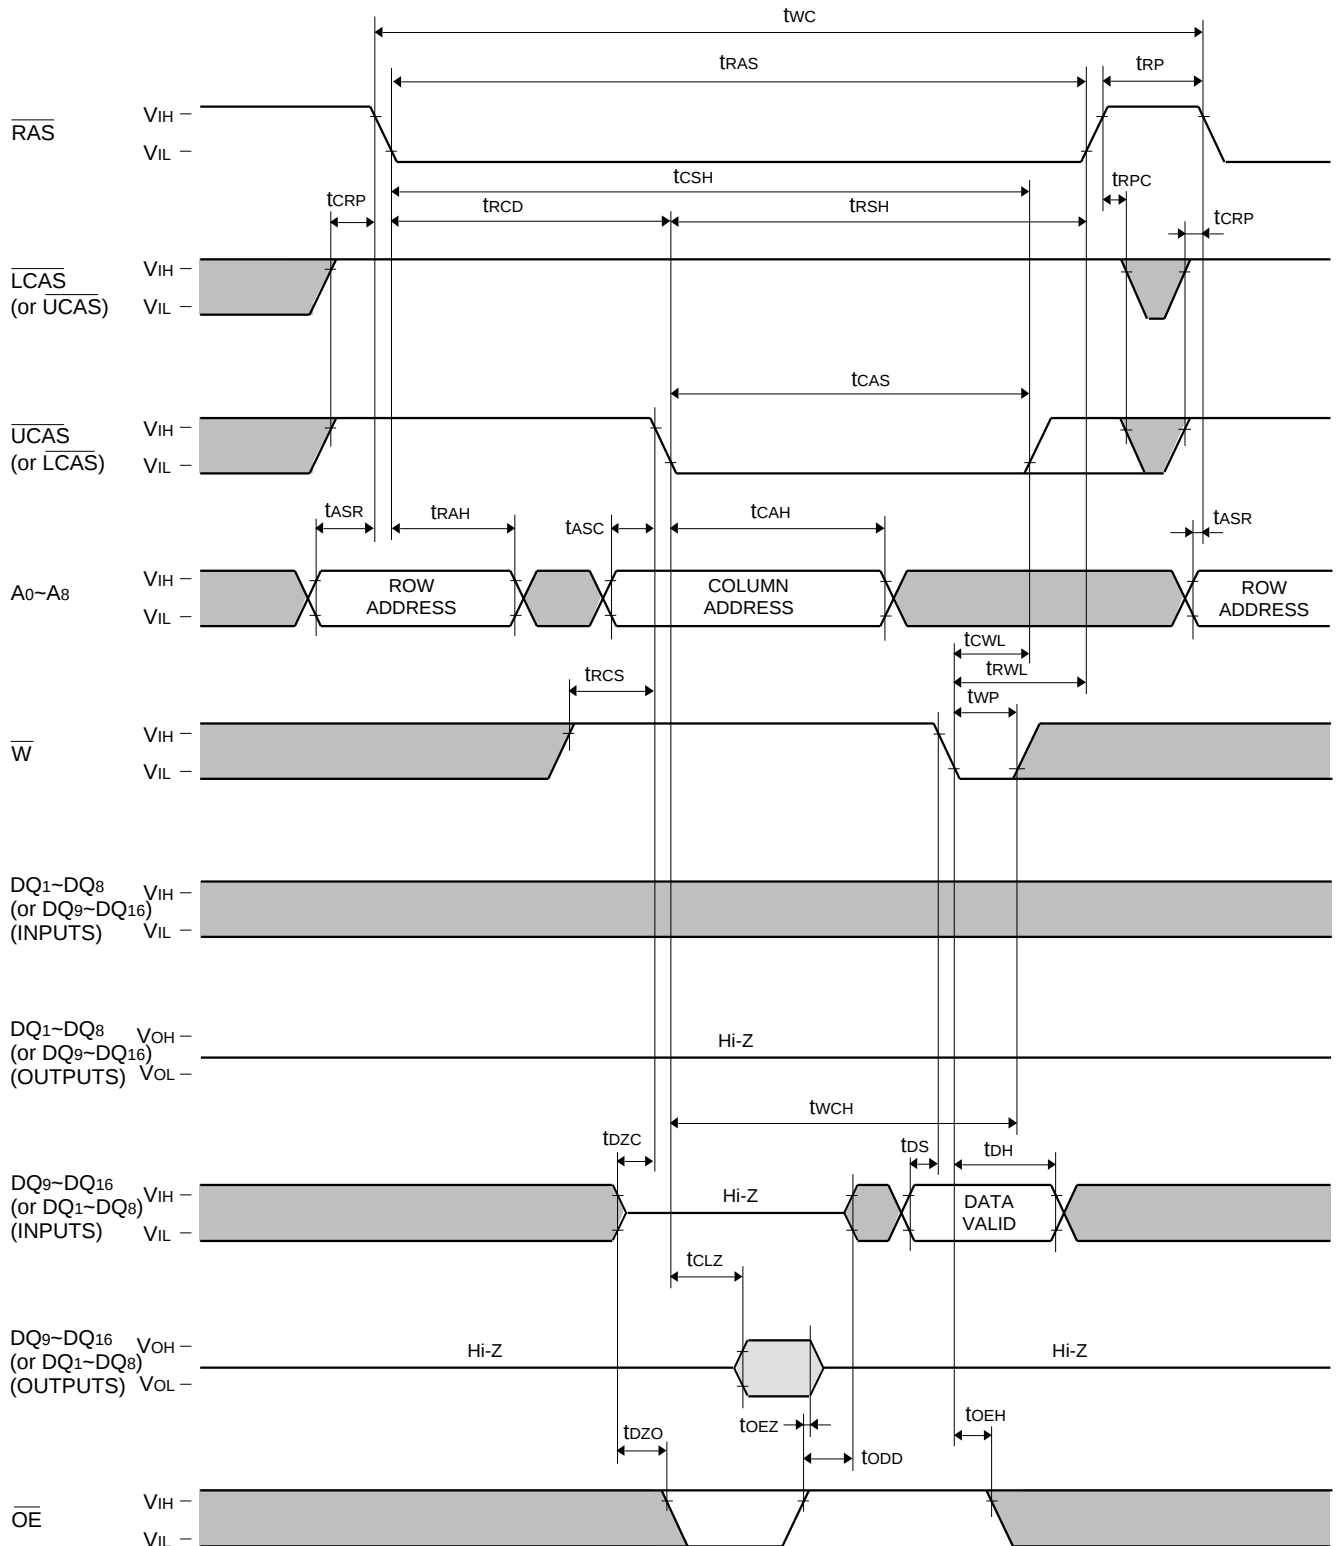

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Read-Write, Read-Modify-Write Cycle

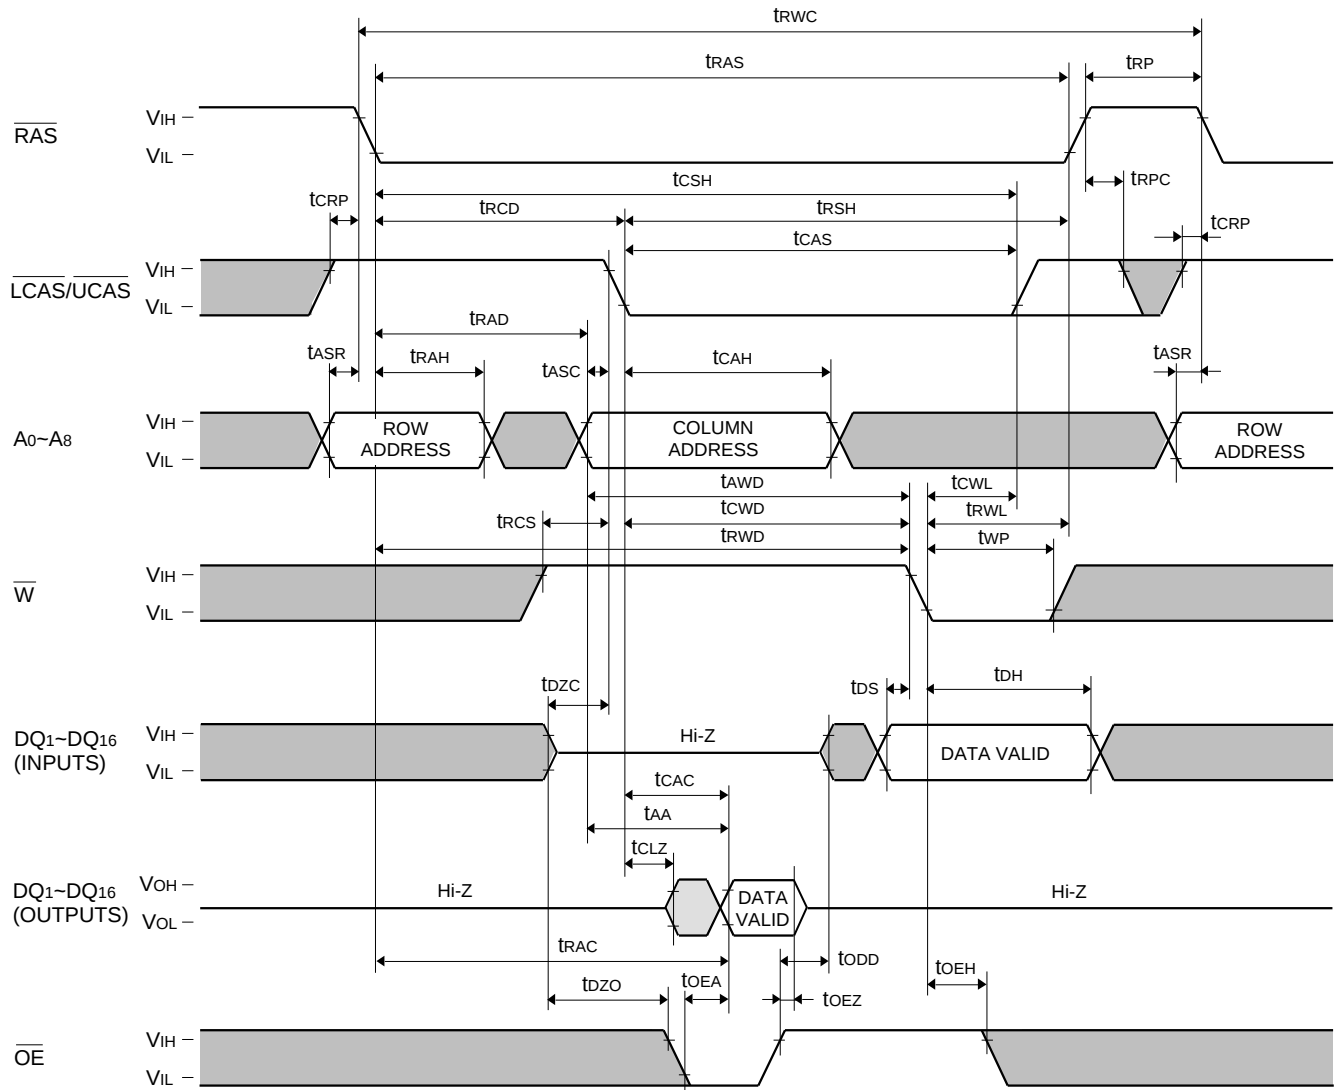


MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Byte Read-Write, Read-Modify-Write Cycle

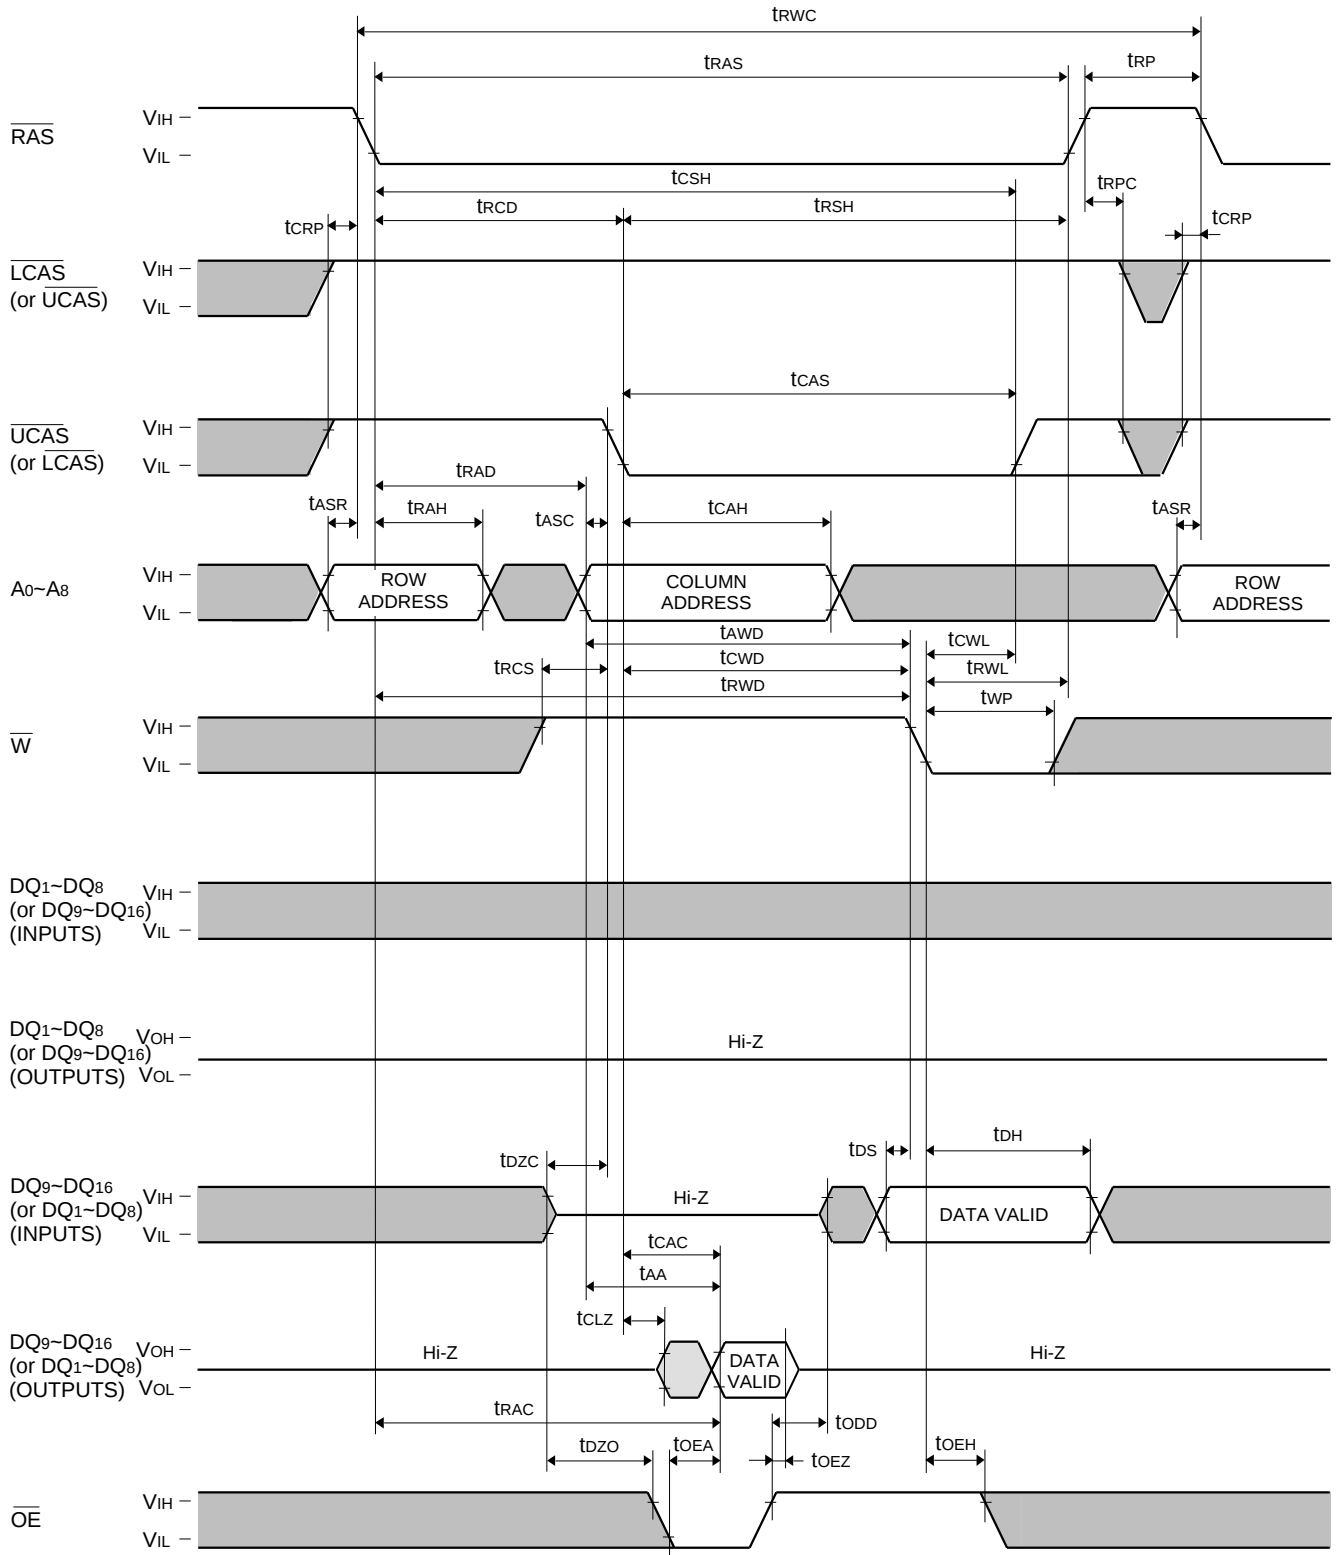


MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Hyper Page Mode Read Cycle

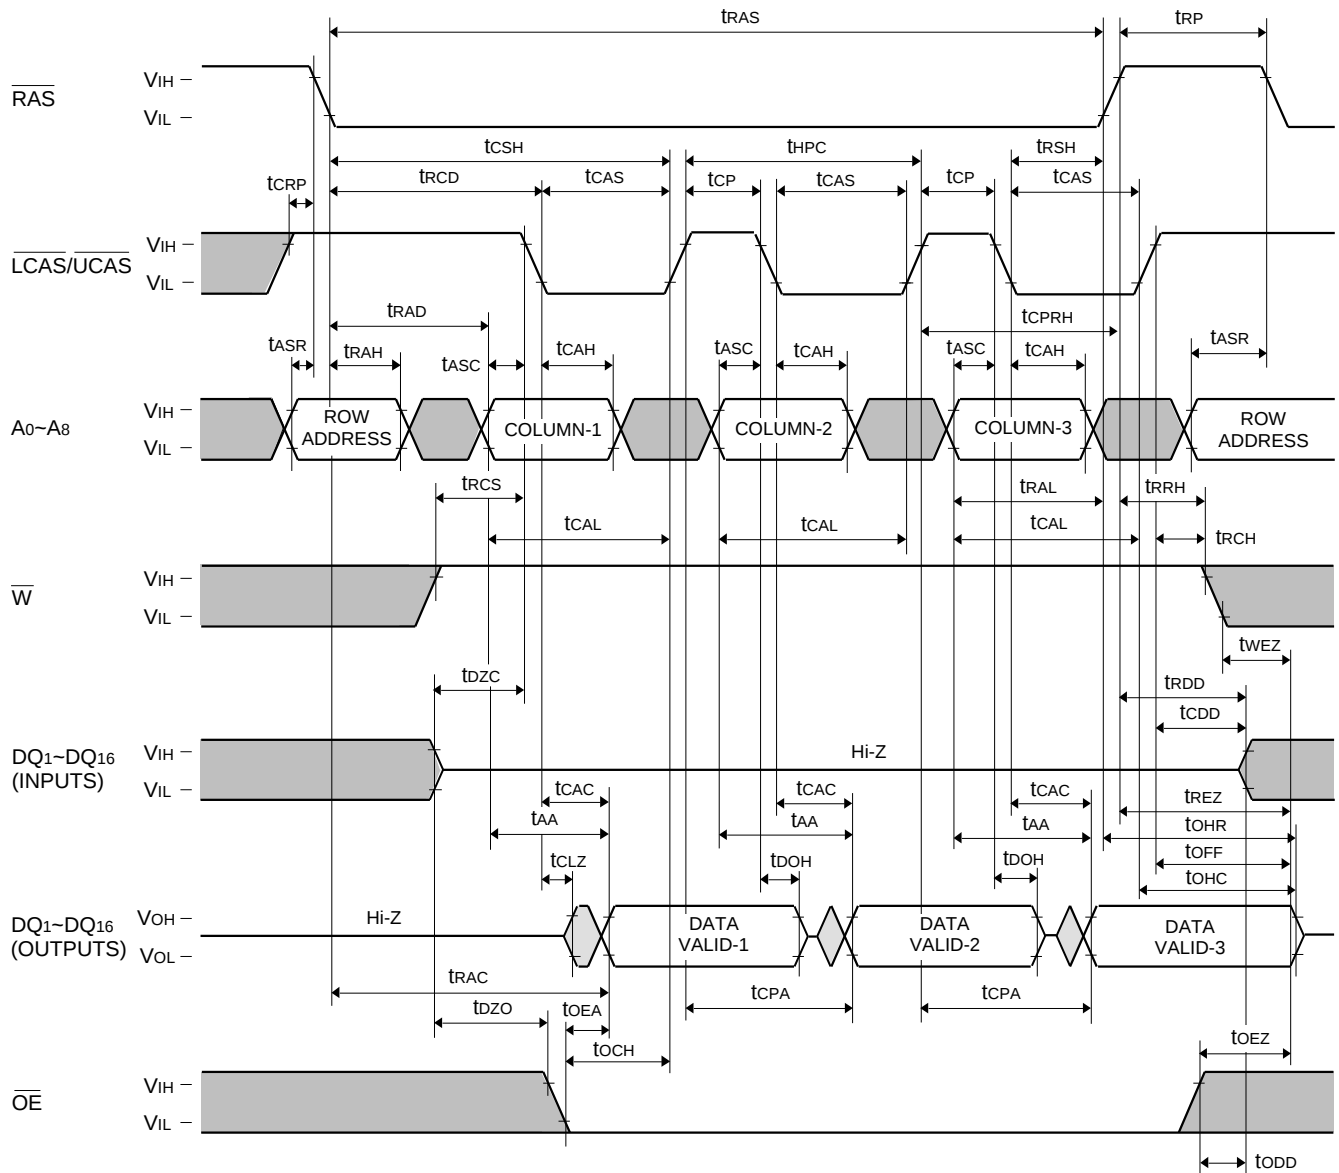


MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM


Hyper Page Mode Byte Read Cycle

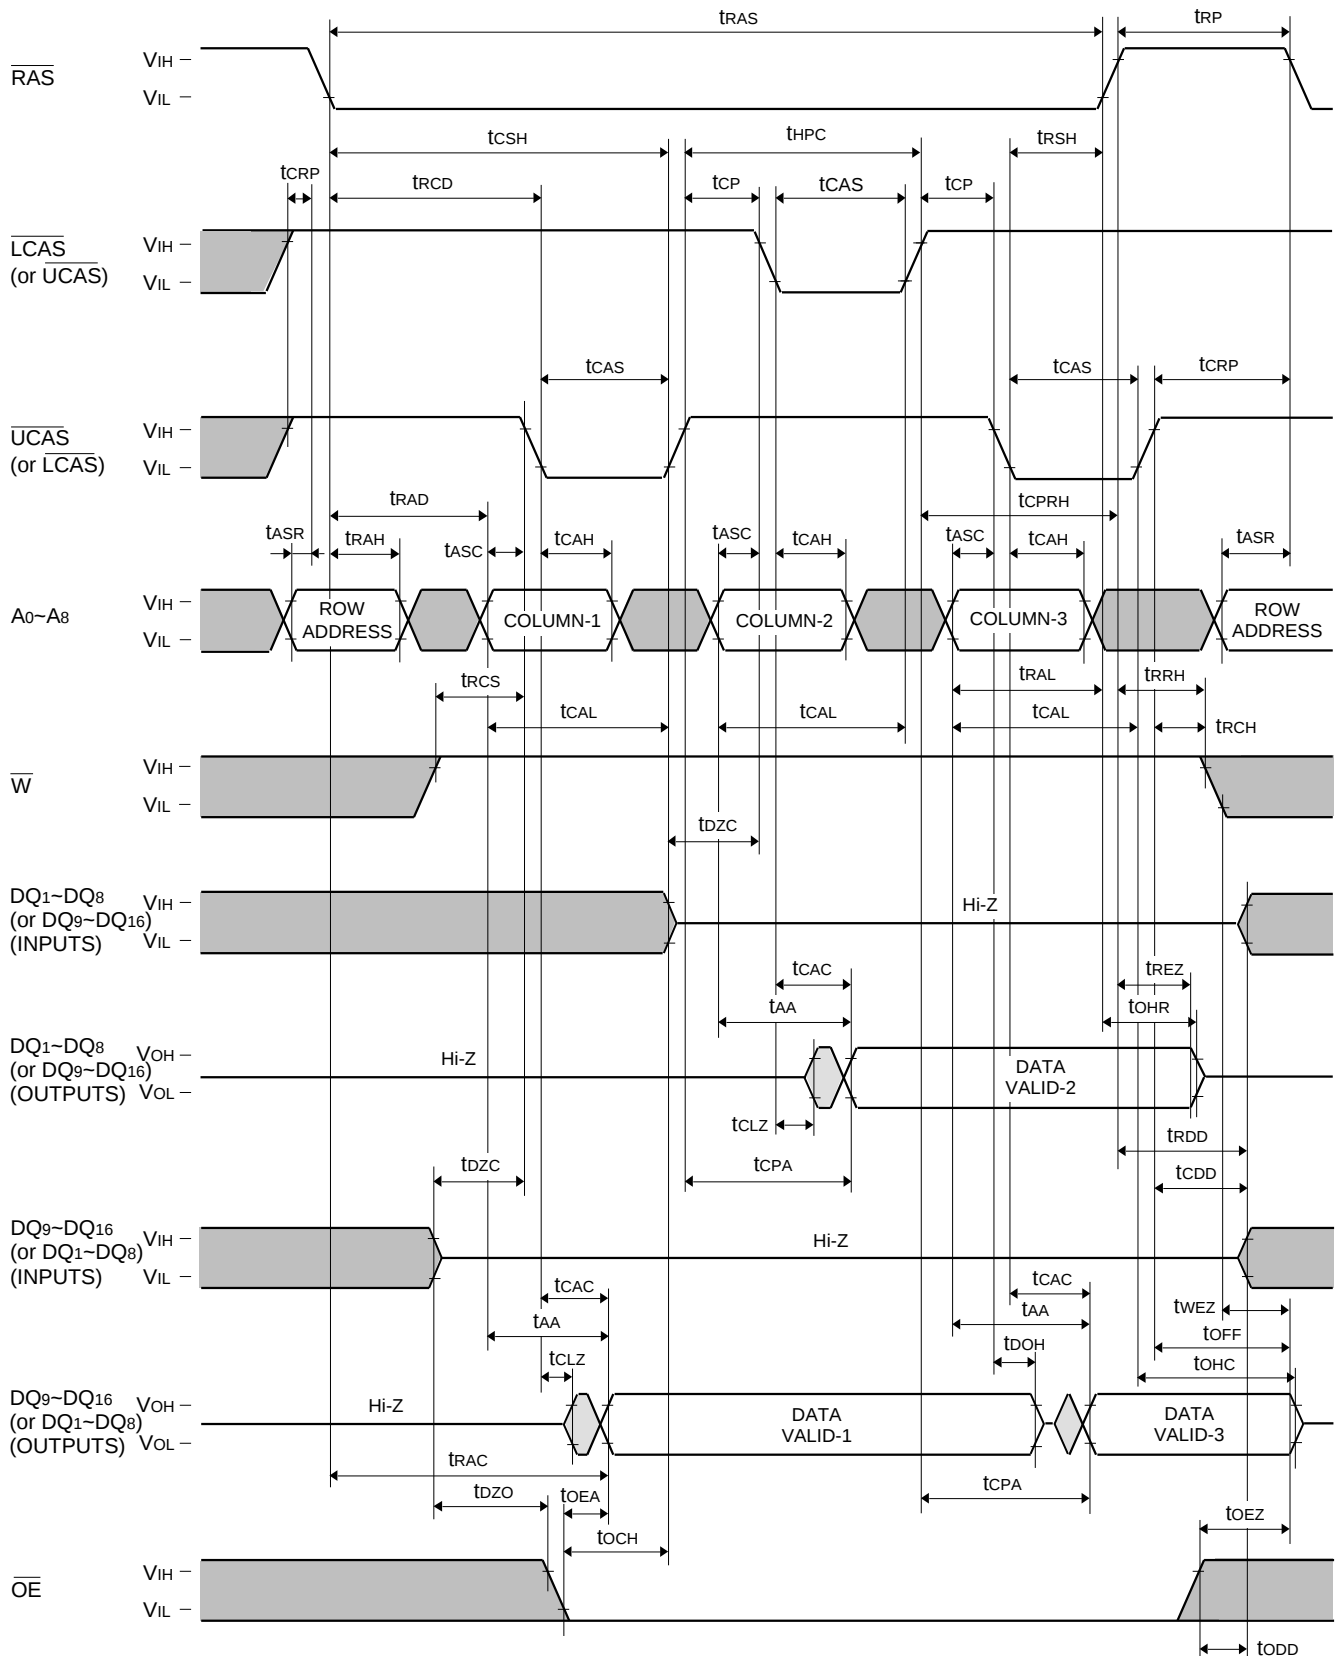

MITSUBISHI LSIs
M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Hyper Page Mode Early Write Cycle

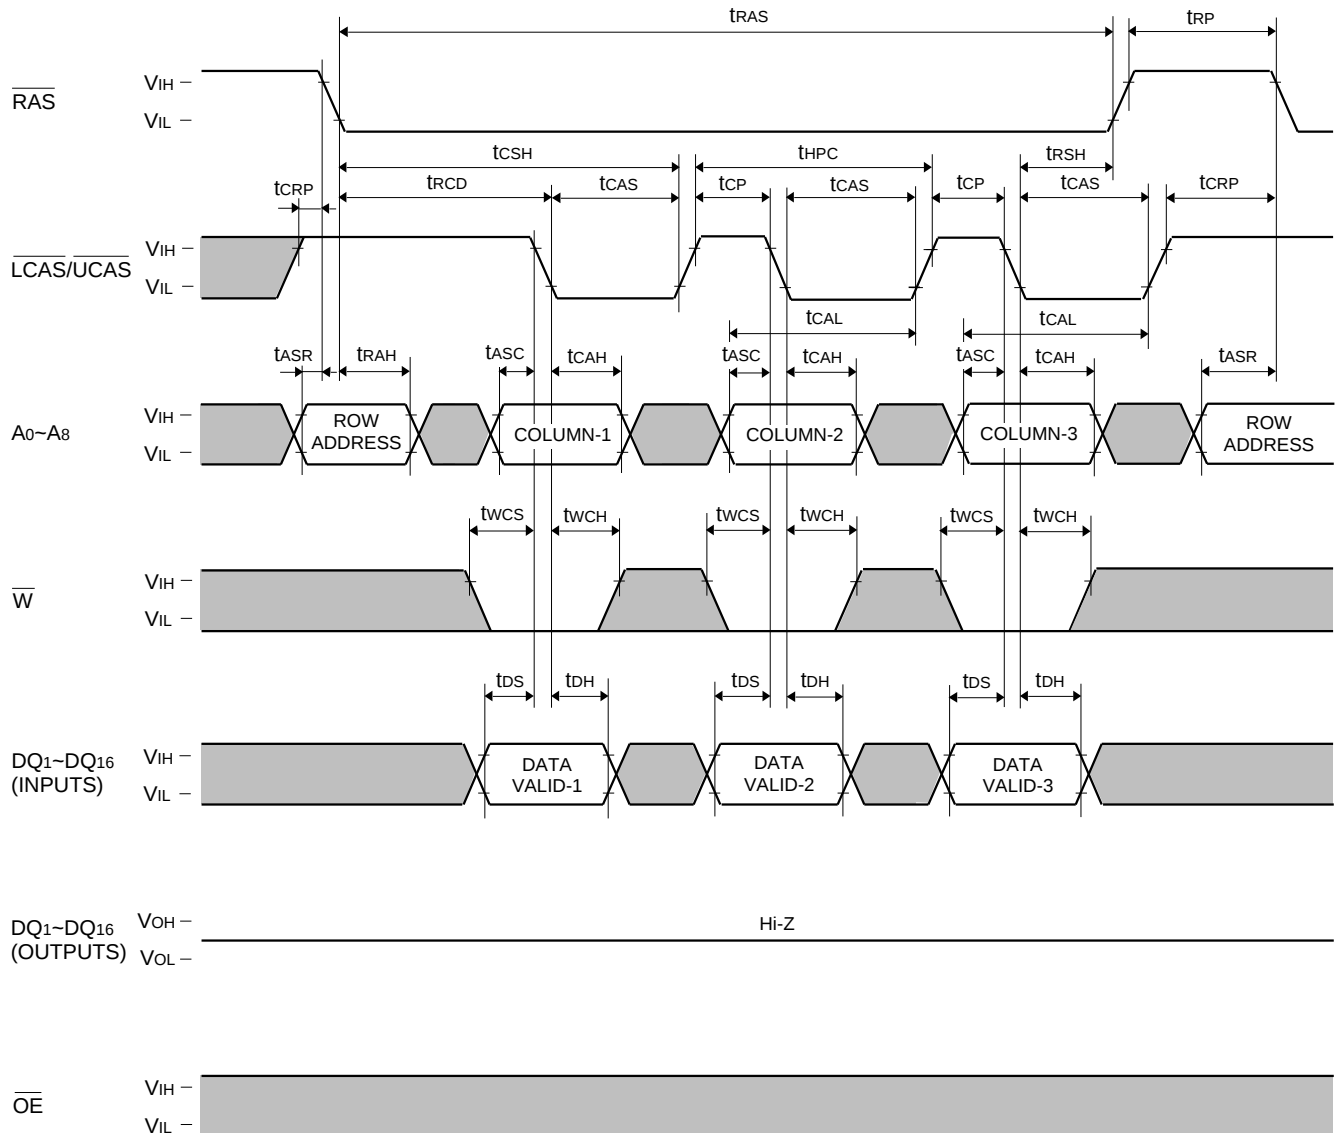


MITSUBISHI LSIs


M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Hyper Page Mode Byte Early Write Cycle

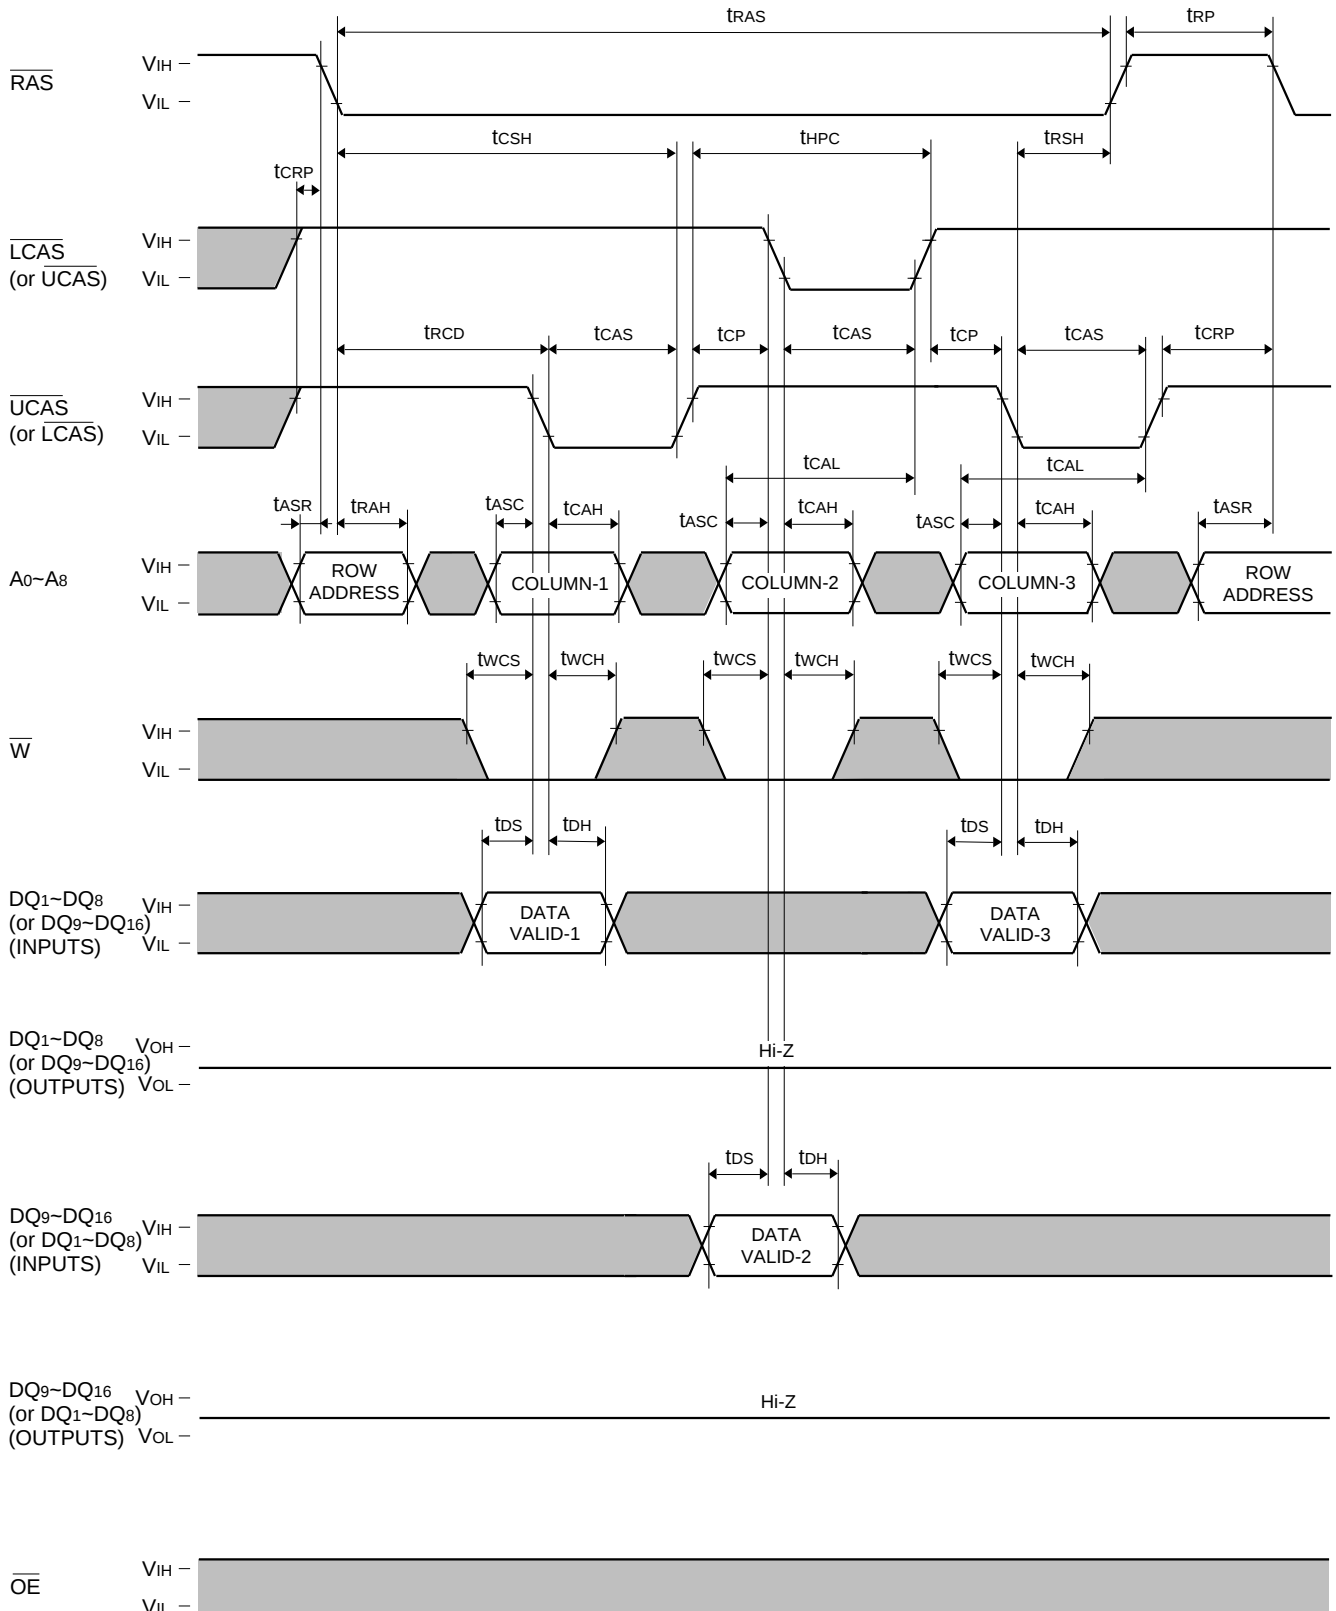

Hyper Page Mode Read-Write, Read-Modify-Write Cycle

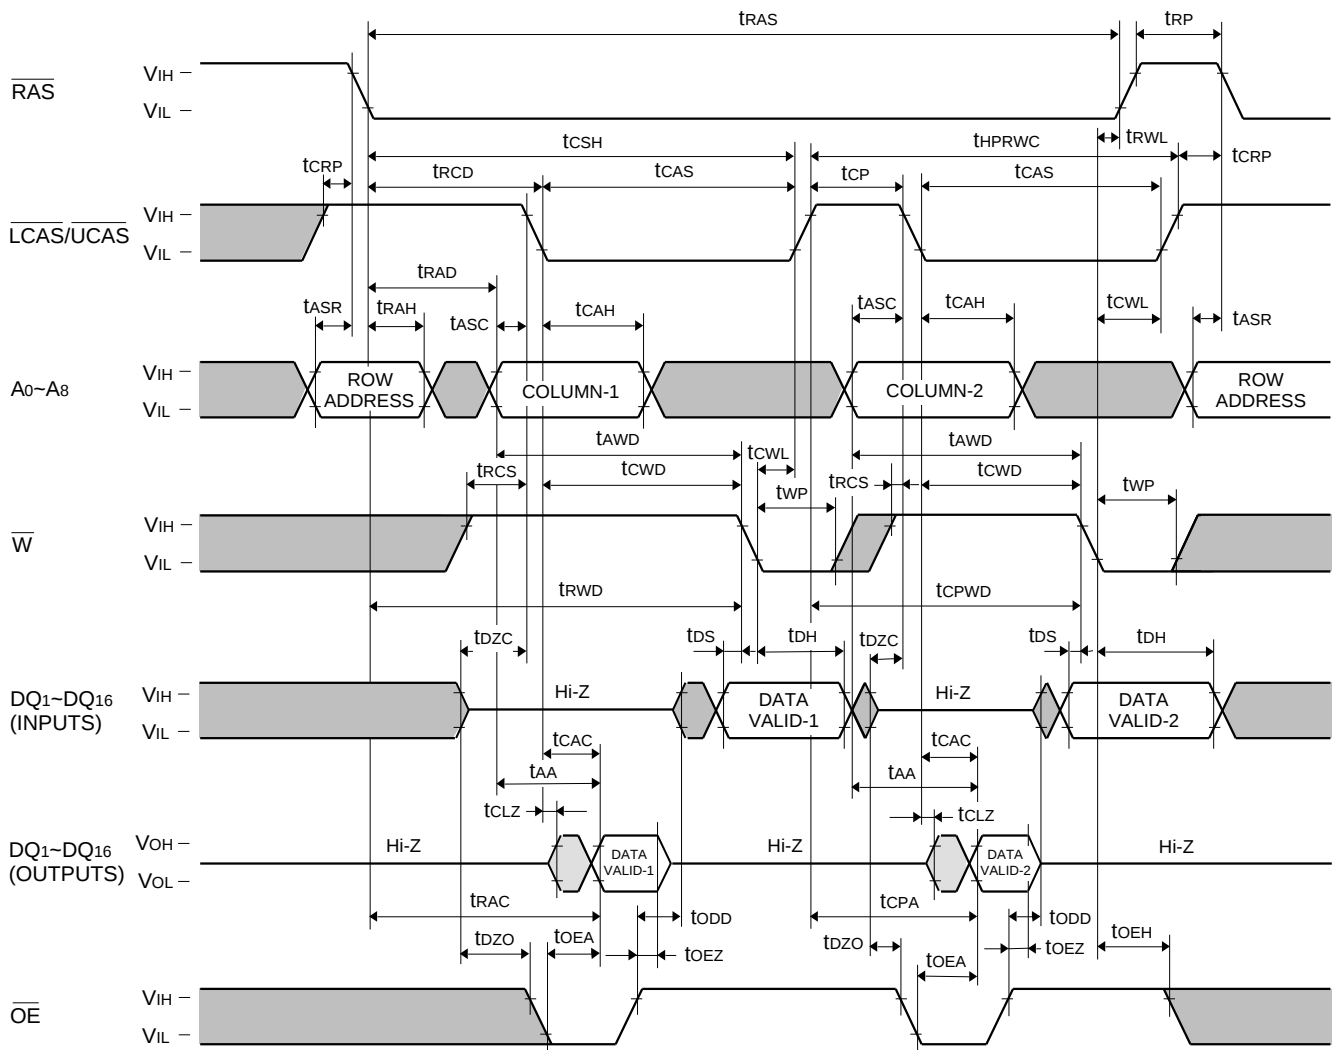


MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Hyper Page Mode Byte Read-Write, Read-Modify-Write Cycle

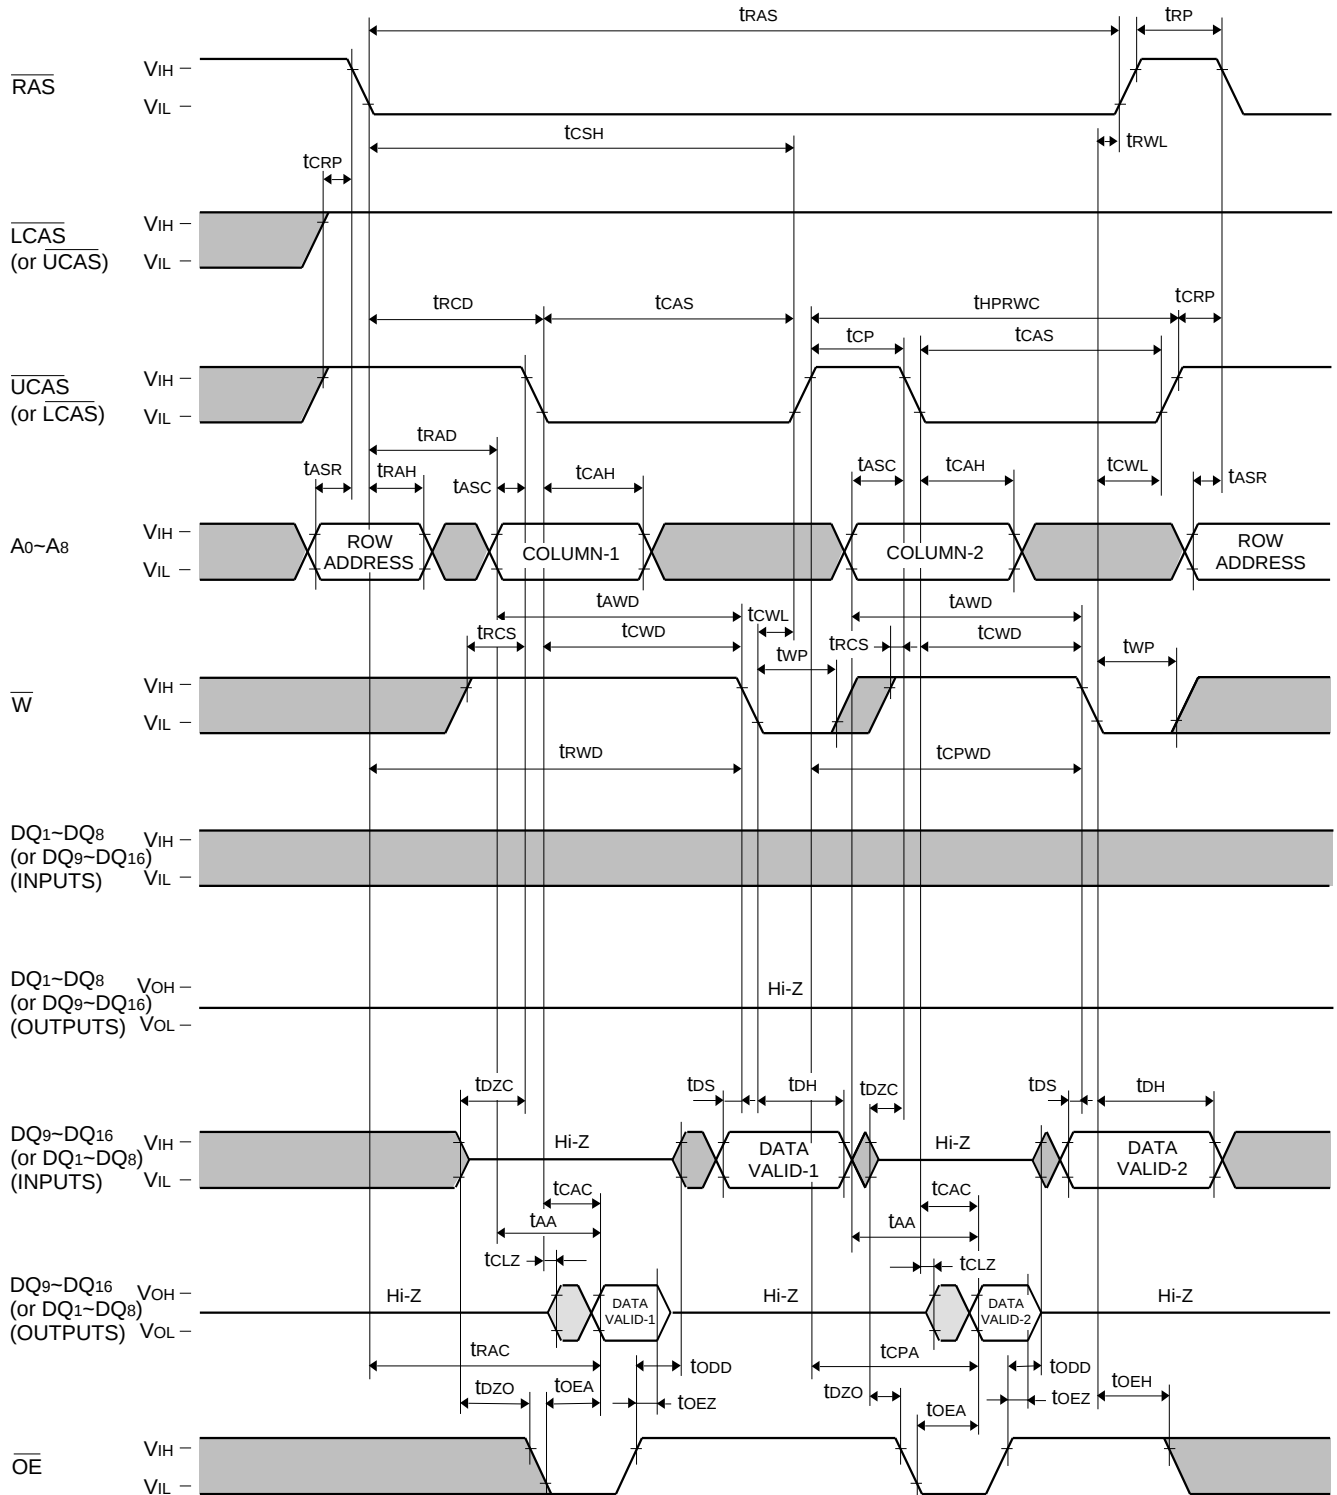


MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S


EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Hyper Page Mode Mix Cycle (1)

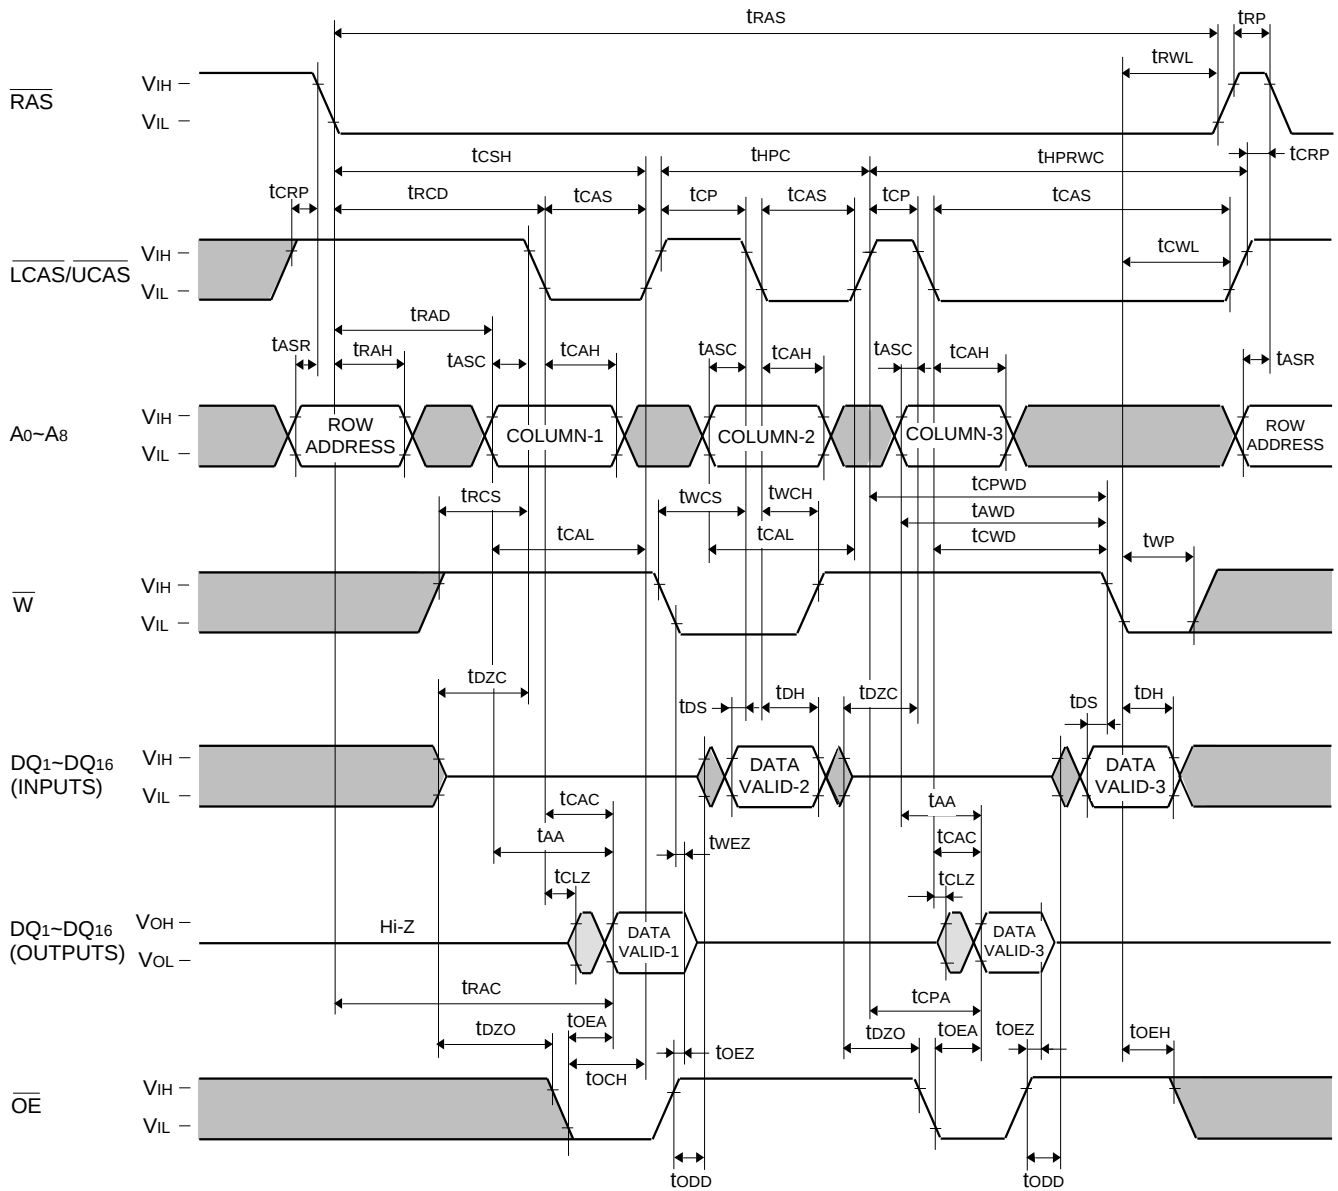


EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Hyper Page Mode Mix Cycle (2)

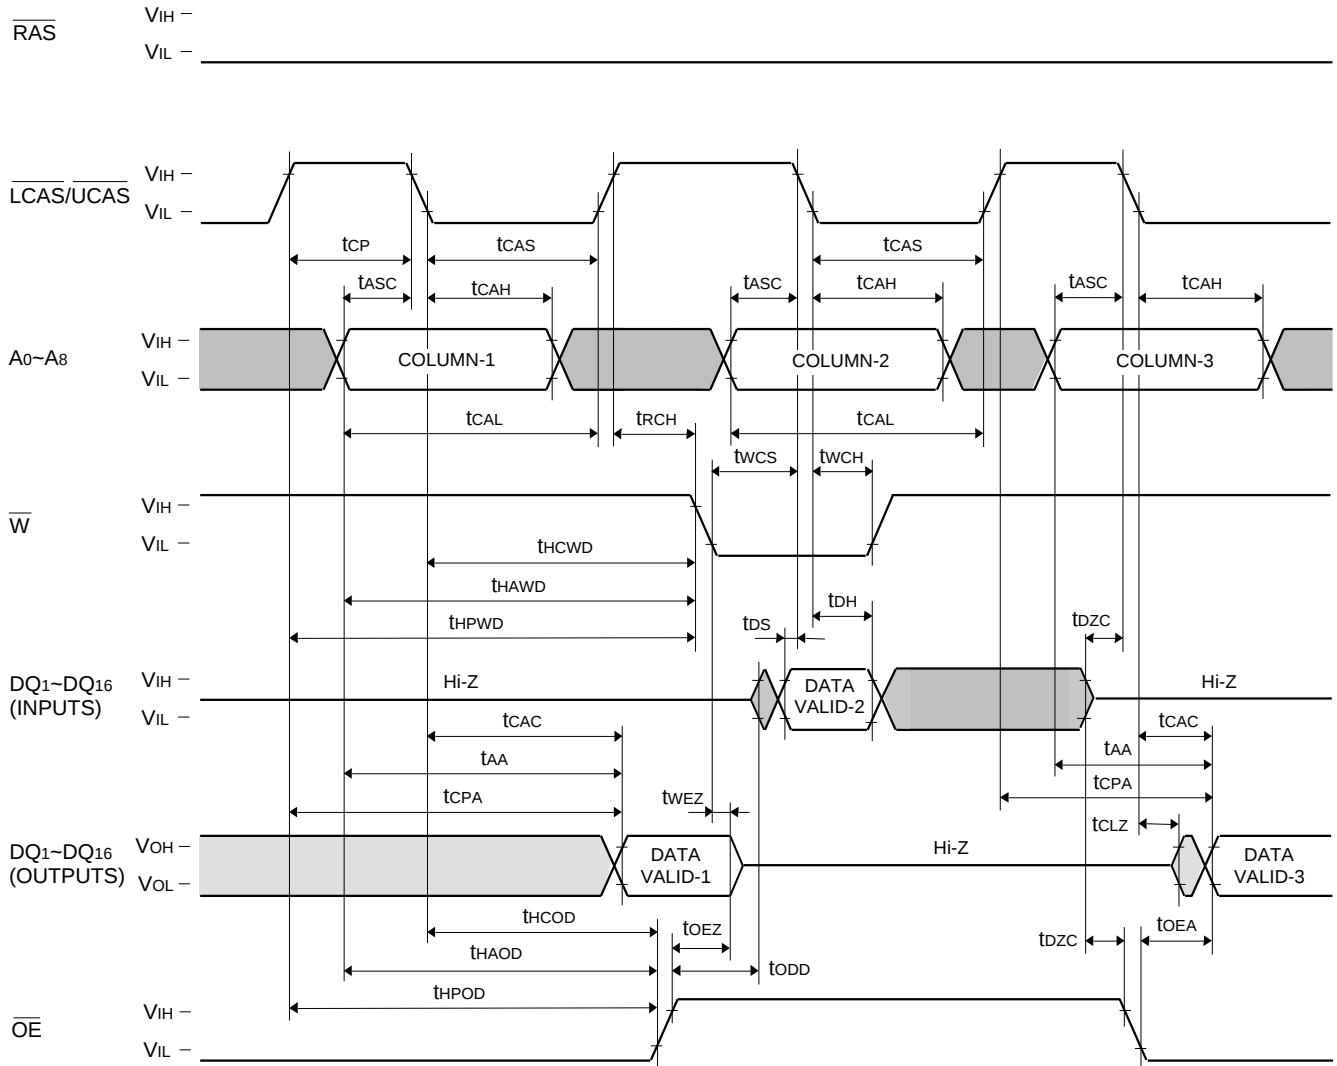


EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Hyper Page Mode Read Cycle (Hi-Z control by $\overline{\text{OE}}$)

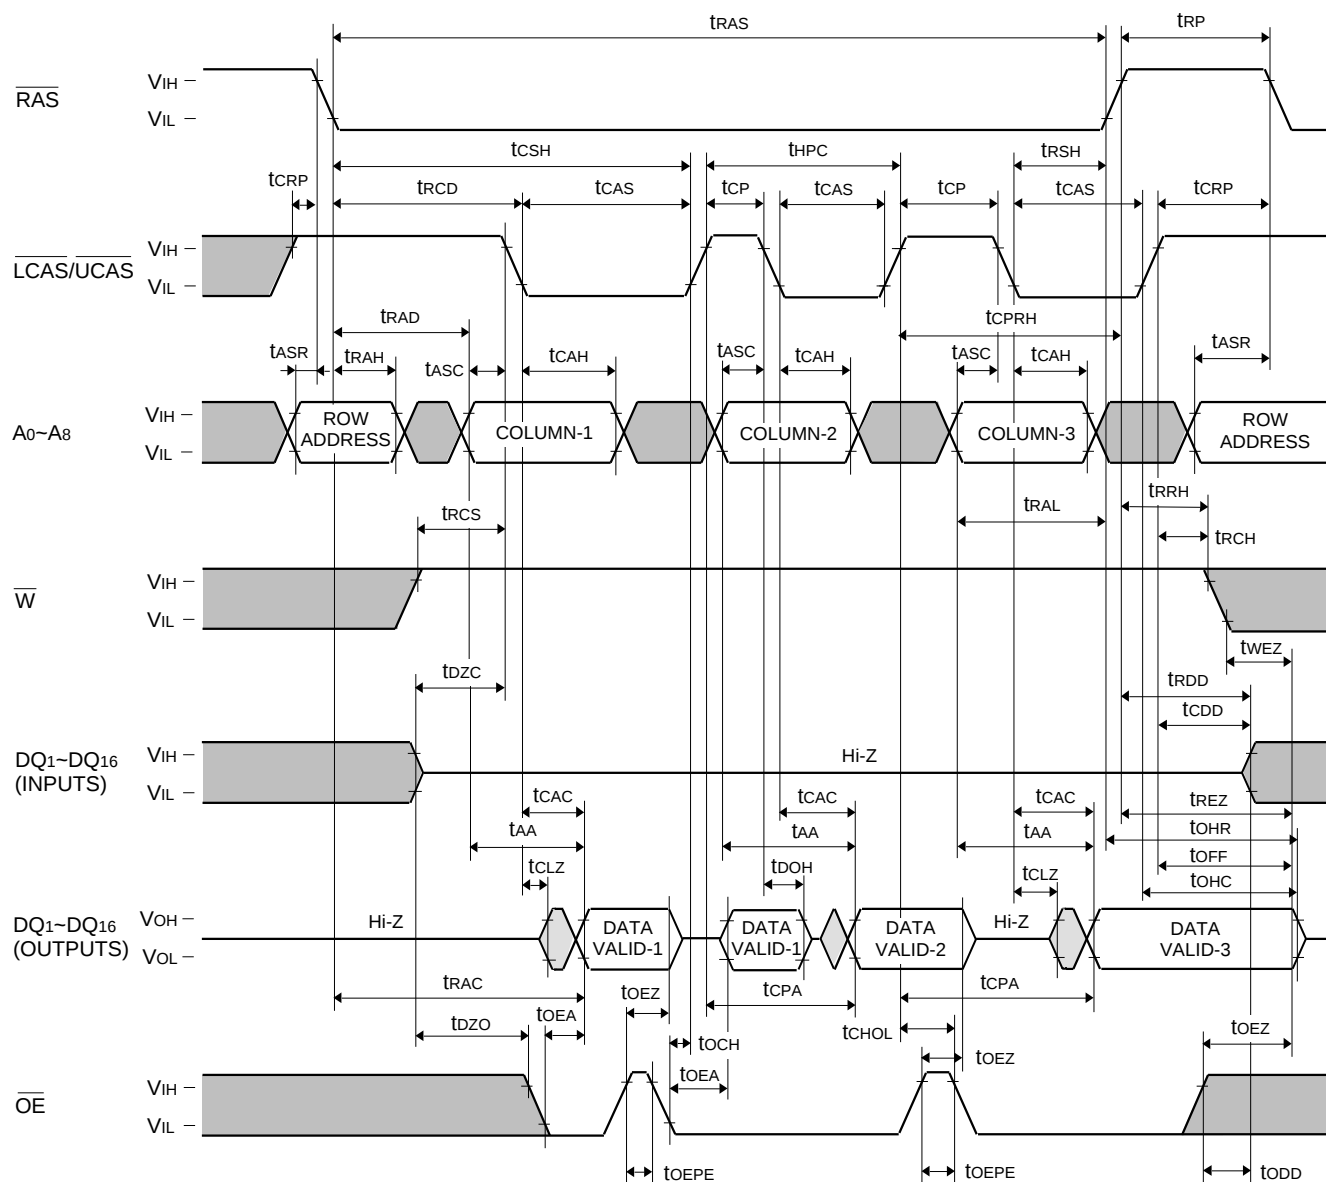

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Hyper Page Mode Read Cycle (Hi-Z control by $\overline{W}$)

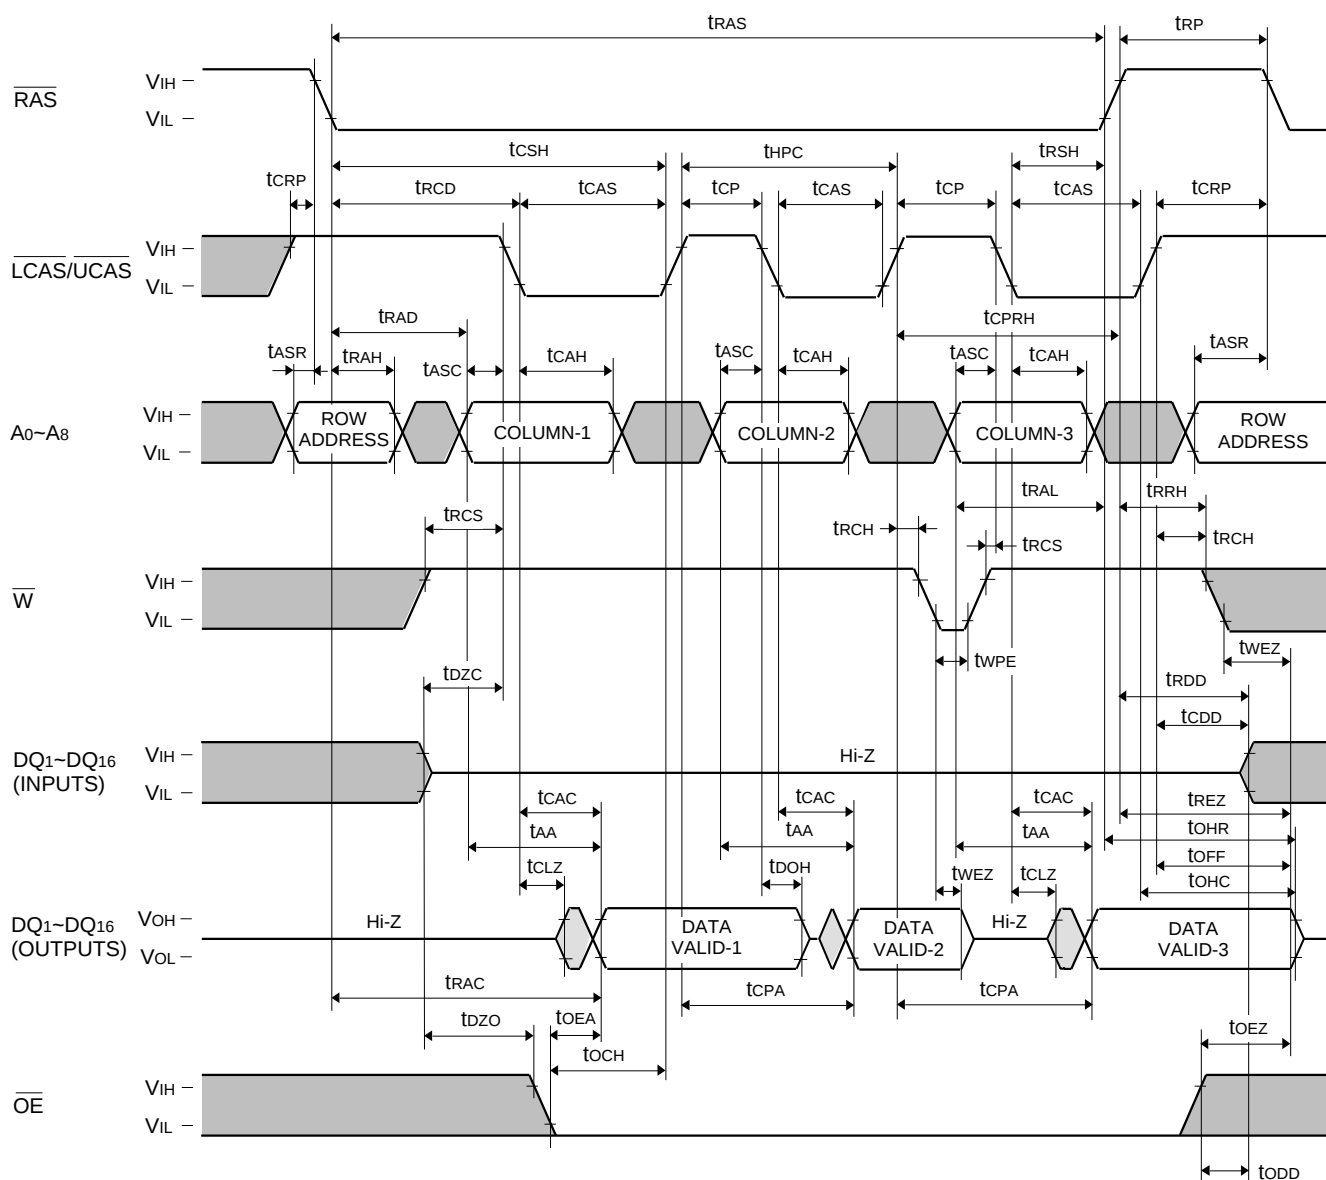


MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S


EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

RAS-only Refresh Cycle

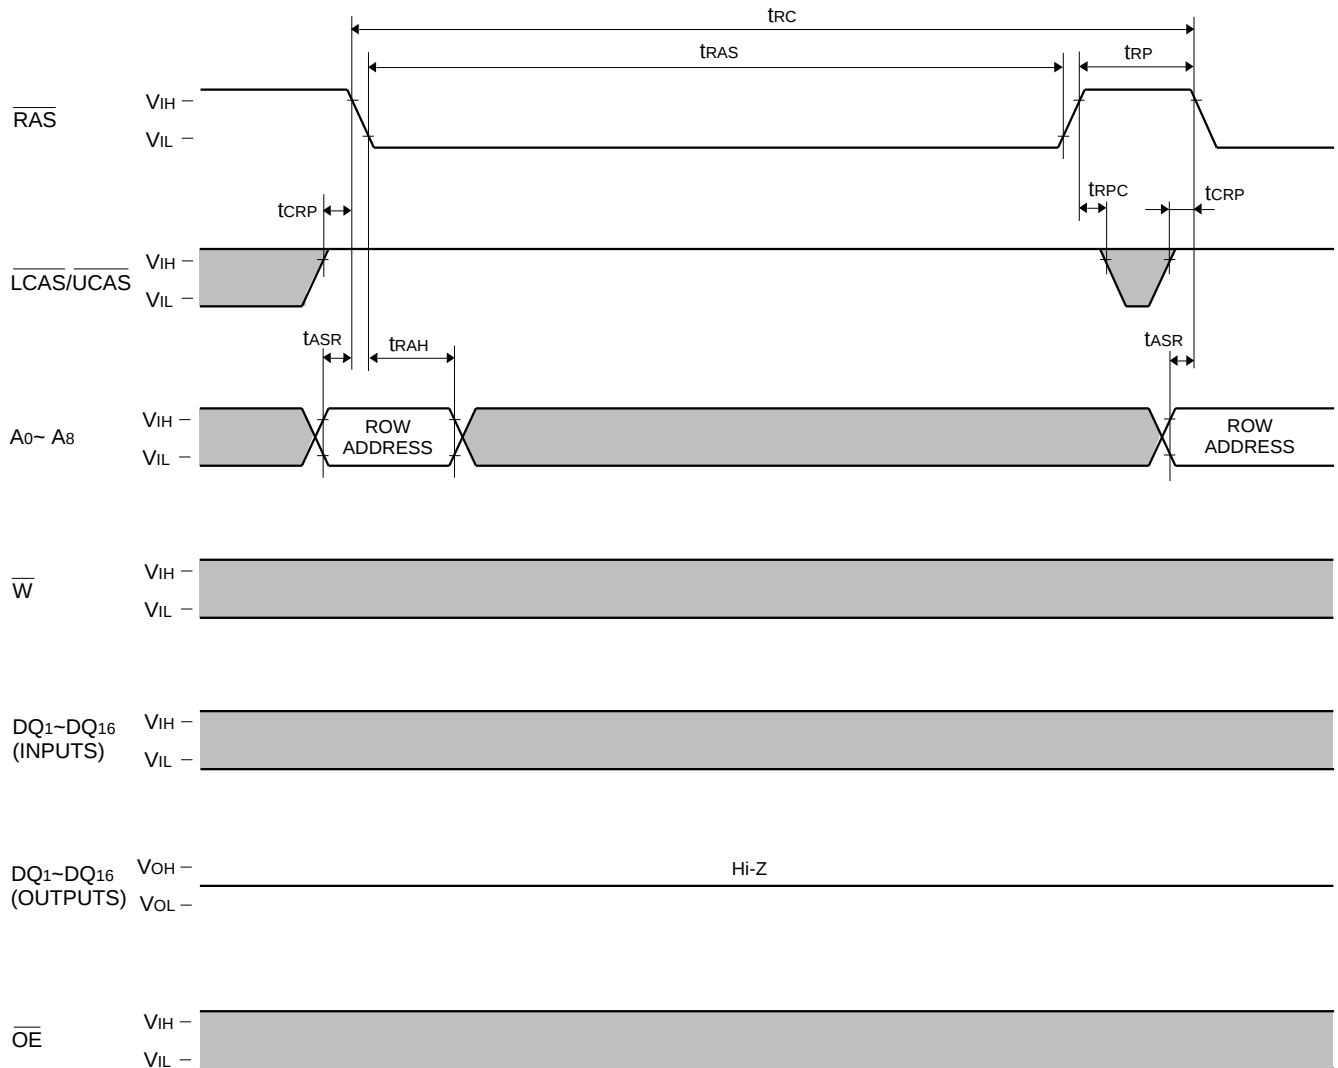


EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ Refresh Cycle, Extended Refresh Cycle*

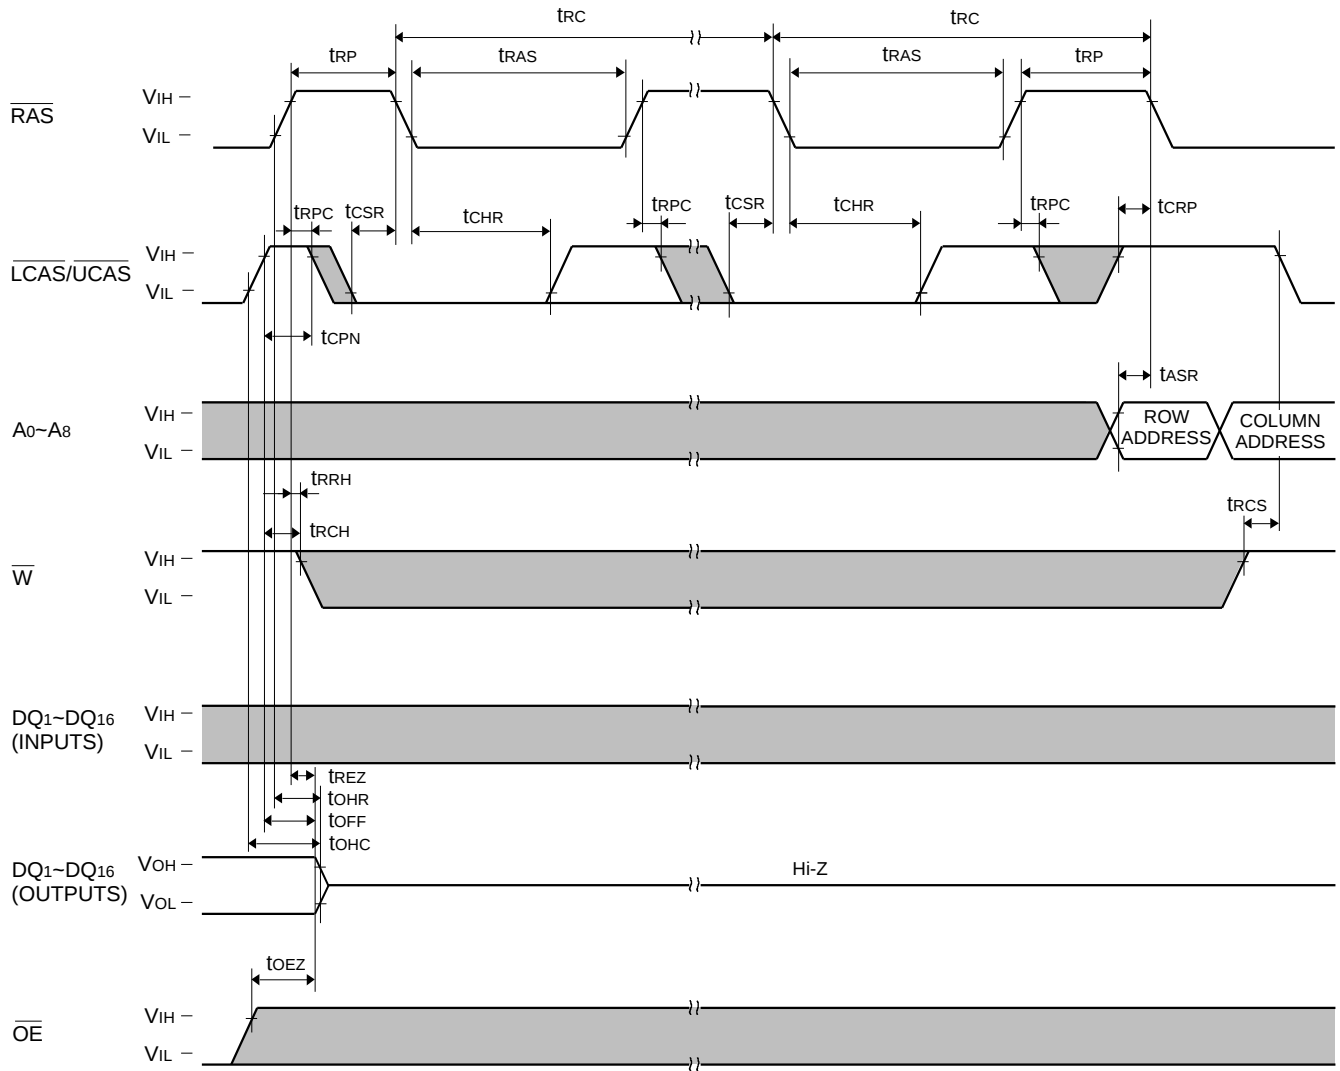

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Hidden Refresh Cycle (Read) (Note 32)

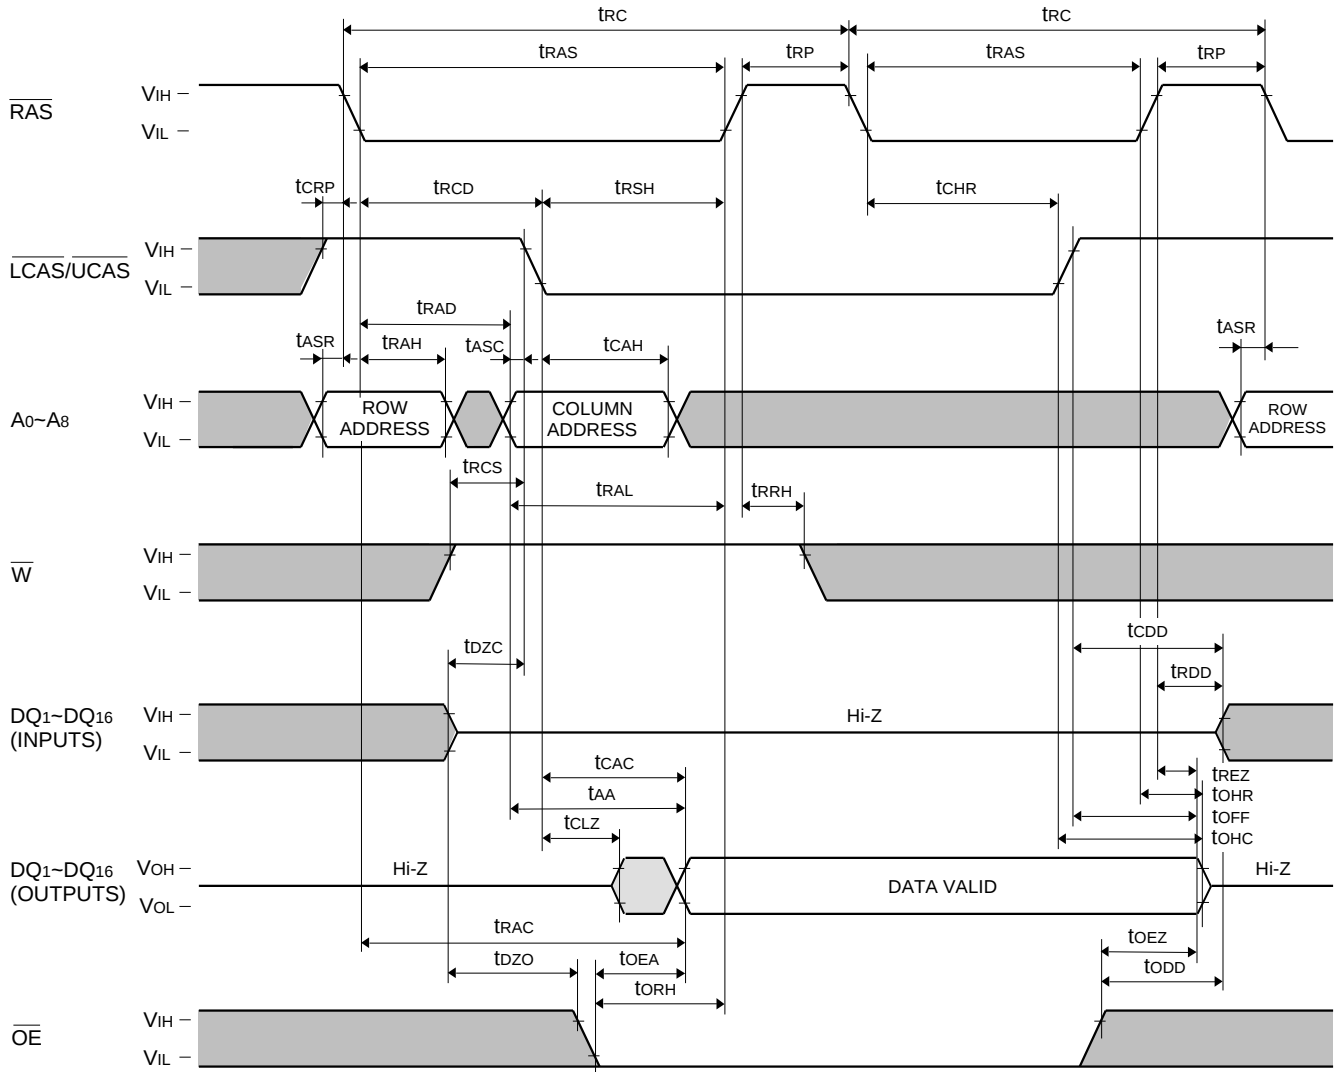


Note 32: Early write, delayed write, read write or read modify write cycle is applicable instead of read cycle.
Timing requirements and output state are the same as that of each cycle shown above.

MITSUBISHI LSIs

M5M44265CJ,TP-5,-6,-7,-5S,-6S,-7S

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Self Refresh Cycle* (Note 30)

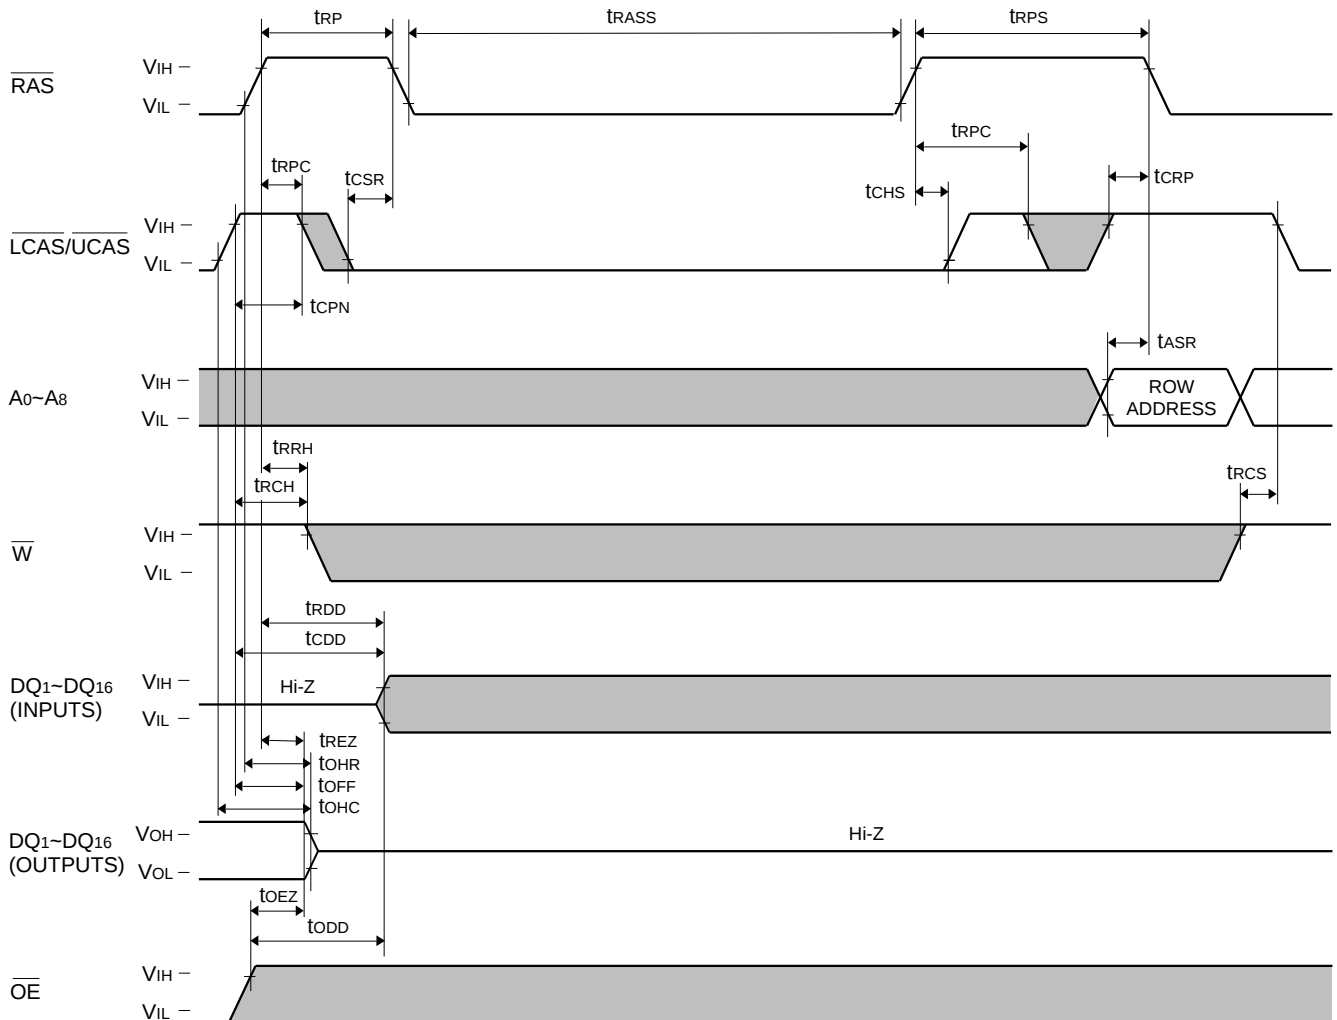

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

Note 30 : Self refresh sequence

Two refreshing methods should be used properly depending on the low pulse width (t_{RASS}) of $\overline{RAS}$ signal during self refresh period.

1. Distributed refresh during Read/Write operation

(A) Timing Diagram


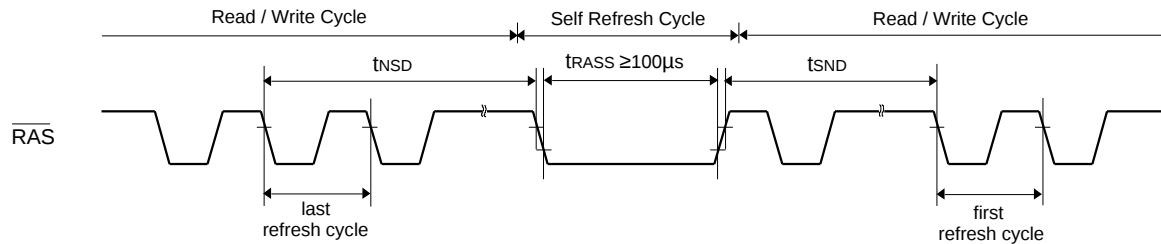


Table 2

Read / Write Cycle	Read / Write → Self Refresh	Self Refresh → Read / Write
CBR distributed refresh	$t_{NSD} \leq 250\mu s$	$t_{SND} \leq 250\mu s$
$\overline{RAS}$ only distributed refresh	$t_{NSD} \leq 16\mu s$	$t_{SND} \leq 16\mu s$

(B) Definition of distributed refresh

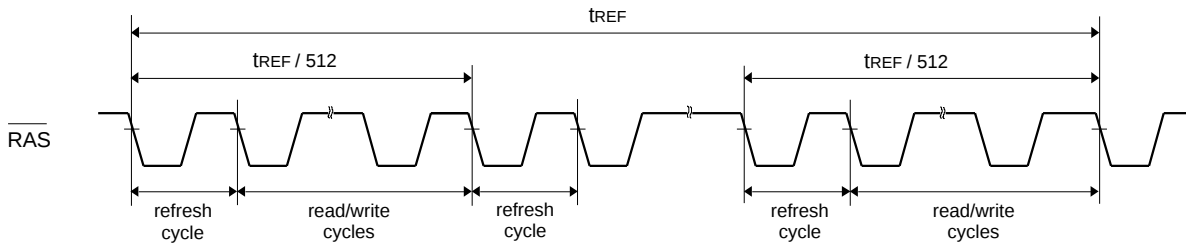

**Definition of CBR distributed refresh
(Including extended refresh)**

The CBR distributed refresh performs more than 512 constant period (250μs max.) CBR cycles within 128 ms.

Definition of $\overline{RAS}$ only distributed refresh

All combinations of nine row address signals ($A_0 \sim A_8$) are selected during 512 constant period (16μs max.) $\overline{RAS}$ only refresh cycles within 8.2 ms.

Note:

Hidden refresh may be used instead of CBR refresh.

$\overline{RAS}/\overline{CAS}$ refresh may be used instead of $\overline{RAS}$ only refresh.

1.1 CBR distributed refresh

- Switching from read/write operation to self refresh operation.
The time interval from the falling edge of $\overline{RAS}$ signal in the last CBR refresh cycle during read/write operation period to the falling edge of $\overline{RAS}$ signal at the start of self refresh operation should be set within t_{NSD} (shown in table 2).

- Switching from self refresh operation to read/write operation.
The time interval from the rising edge of $\overline{RAS}$ signal at the end of self refresh operation to the falling edge of $\overline{RAS}$ signal in the first CBR refresh cycle during read/write operation period should be set within t_{SND} (shown in table 2).

1.2 $\overline{RAS}$ only distributed refresh

- Switching from read/write operation to self refresh operation.
The time interval t_{NSD} from the falling edge of $\overline{RAS}$ signal in the last $\overline{RAS}$ only refresh cycle during read/write operation period to the falling edge of $\overline{RAS}$ signal at the start of self refresh operation should be set within 16μs.
- Switching from self refresh operation to read/write operation.
The time interval t_{SND} from the rising edge of $\overline{RAS}$ signal at the end of self refresh operation to the falling edge of $\overline{RAS}$ signal in the first CBR refresh cycle during read/write operation period should be set within 16μs.

EDO (HYPER PAGE MODE) 4194304-BIT (262144-WORD BY 16-BIT) DYNAMIC RAM

2. Burst refresh during Read/Write operation

(A) Timing diagram


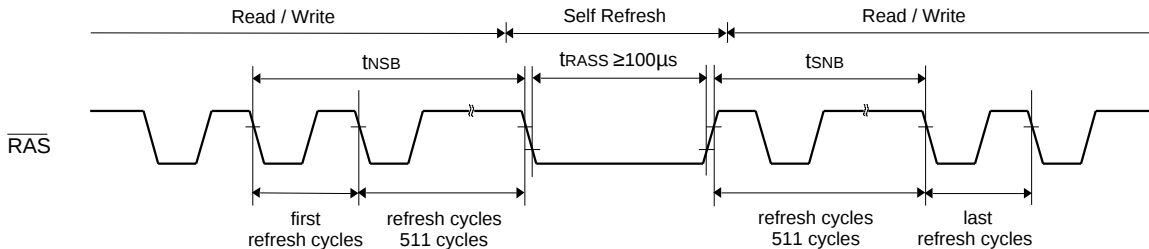


Table 3

Read / Write Cycle	Read / Write → Self Refresh	Self Refresh → Read / Write
CBR burst refresh	$t_{NSB} \leq 8.2\text{ms}$	$t_{SNB} \leq 8.2\text{ms}$
RAS only burst refresh	$t_{NSB} + t_{SNB} \leq 8.2\text{ms}$	

(B) Definition of burst refresh

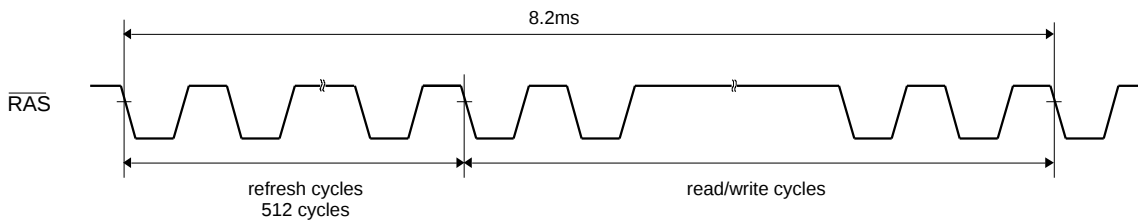

Definition of CBR burst refresh

The CBR burst refresh performs more than 512 continuous CBR cycles within 8.2 ms.

Definition of RAS only burst refresh

All combination of nine row address signals ($A_0 \sim A_8$) are selected during 512 continuous RAS only refresh cycles within 8.2 ms.

2.1 CBR burst refresh

- Switching from read/write operation to self refresh operation.
The time interval t_{NSB} from the falling edge of RAS signal in the first CBR refresh cycle during read/write operation period to the falling edge of RAS signal at the start of self refresh operation should be set within 8.2 ms.
- Switching from self refresh operation to read/write operation.
The time interval t_{SNB} from the rising edge of RAS signal at the end of self refresh operation to the falling edge of RAS signal in the last CBR refresh cycle during read/write operation period should be set within 8.2 ms.

2.2 RAS only burst refresh

- Switching from read/write operation to self refresh operation.
The time interval from the falling edge of RAS signal in the first RAS only refresh cycle during read/write operation period to the falling edge of RAS signal at the start of self refresh operation should be set within t_{NSB} (shown in table 3).
- Switching from self refresh operation to read/write operation.
The time interval from the rising edge of RAS signal at the end of self refresh operation to the falling edge of RAS signal in the last RAS only refresh cycle during read/write operation period should be set within t_{SNB} (shown in table 3).