



SAW Components

Data Sheet B7720

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a faint, stylized globe with circuitry patterns, suggesting a global network or technological theme. The overall color scheme is dark with blue and white highlights.



SAW Components

B7720

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet




Chip Sized SAW Package DCS6I

Features

- Low-loss RF filter for mobile telephone PCS systems, receive path
- High selectivity
- Low amplitude ripple
- Usable passband 60 MHz
- Unbalanced to balanced operation
- No external matching required
- Package for **Surface Mounted Technology (SMT)**

Terminals


- Gold-plated Ni

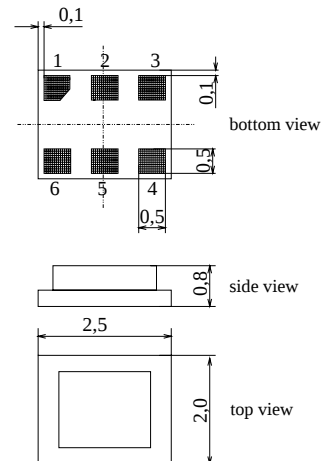

Dimensions in mm, approx. weight 0,014 g

Pin configuration

- | | |
|---------|-----------------|
| 2 | Input |
| 4, 6 | Balanced output |
| 1, 3, 5 | To be grounded |



Type	Ordering code	Marking and Package according to	Packing according to
B7720	B39202-B7720-C610	C61157-A7-A76	F61074-V8112-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 / + 85	°C	peak power of GSM signal, duty cycle 4:8 duty cycle 4:8 duty cycle 2:8
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	50	V	
Input power at				
GSM850, GSM900	P_{IN}	15	dBm	
GSM1800, GSM1900	P_{IN}	12	dBm	
GSM1800, GSM1900	P_{IN}	13	dBm	
Tx bands				



SAW Components

B7720

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Characteristics

Operating Temperature Range:	$T = +25 \pm 2^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50 \Omega$ (unbalanced)
Terminating load impedance:	$Z_L = 50 \Omega$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1930,0 ... 1990,0 MHz		—	2,7	3,1*	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930,0 ... 1990,0 MHz		—	0,9	1,5	dB
Input VSWR					
1930,0 ... 1990,0 MHz		—	1,8	2,0	
Output VSWR					
1930,0 ... 1990,0 MHz		—	1,8	2,0	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)					
1930,0 ... 1990,0 MHz		-15	—	17	°
Output amplitude balance ($ S_{31}/S_{21} $)					
1930,0 ... 1990,0 MHz		-3,0	—	3,0	dB
Differential to common mode suppression	S_{sc12}				
855,0 ... 995,0 MHz		22,0	29,0	—	dB
1710,0 ... 1930,0 MHz		20,0	25,0	—	dB
1930,0 ... 1975,0 MHz		18,0	20,0	—	dB
1975,0 ... 1990,0 MHz		18,0	18,0	—	dB
3420,0 ... 3980,0 MHz		22,0	28,0	—	dB
Attenuation	α				
DC ... 1600,0 MHz		28	33	—	dB
1600,0 ... 1830,0 MHz		25	28	—	dB
1830,0 ... 1910,0 MHz		12	15	—	dB
2010,0 ... 2070,0 MHz		14	18	—	dB
2070,0 ... 4000,0 MHz		23	25	—	dB
4000,0 ... 5000,0 MHz		18	20	—	dB
5000,0 ... 6000,0 MHz		16	19	—	dB

* the insertion attenuation includes also pcb losses of typ. 0,2dB



SAW Components

B7720

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Characteristics

Operating Temperature Range: $T = -10$ to $+80^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\ \Omega$ (unbalanced)
Terminating load impedance: $Z_L = 50\ \Omega$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1930,0 ... 1990,0 MHz		—	2,8	3,4*	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930,0 ... 1990,0 MHz		—	1,0	1,8	dB
Input VSWR					
1930,0 ... 1990,0 MHz		—	1,8	2,0	
Output VSWR					
1930,0 ... 1990,0 MHz		—	1,8	2,0	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)					
1930,0 ... 1990,0 MHz		-15	—	17	$^{\circ}$
Output amplitude balance (S_{31}/S_{21})					
1930,0 ... 1990,0 MHz		-3,0	—	3,0	dB
Differential to common mode suppression	S_{sc12}				
855,0 ... 995,0 MHz		22,0	29,0	—	dB
1710,0 ... 1930,0 MHz		20,0	25,0	—	dB
1930,0 ... 1975,0 MHz		18,0	20,0	—	dB
1975,0 ... 1990,0 MHz		17,0	18,0	—	dB
3420,0 ... 3980,0 MHz		22,0	28,0	—	dB
Attenuation	α				
DC ... 1600,0 MHz		28	33	—	dB
1600,0 ... 1830,0 MHz		25	28	—	dB
1830,0 ... 1910,0 MHz		10	11	—	dB
2010,0 ... 2070,0 MHz		10	14	—	dB
2070,0 ... 4000,0 MHz		23	25	—	dB
4000,0 ... 5000,0 MHz		18	20	—	dB
5000,0 ... 6000,0 MHz		16	19	—	dB

* the insertion attenuation includes also pcb losses of typ. 0,2dB



SAW Components

B7720

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Characteristics

Operating Temperature Range: $T = -40$ to $+85^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\ \Omega$ (unbalanced)
Terminating load impedance: $Z_L = 50\ \Omega$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$	—	3,6	4,1*	dB
1930,0 ... 1990,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,8	2,5	dB
1930,0 ... 1990,0 MHz					
Input VSWR		—	2,0	2,2	
1930,0 ... 1990,0 MHz					
Output VSWR		—	2,0	2,2	
1930,0 ... 1990,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-15	—	17	$^{\circ}$
1930,0 ... 1990,0 MHz					
Output amplitude balance ($ S_{31}/S_{21} $)		-3,5	—	3,0	dB
1930,0 ... 1990,0 MHz					
Differential to common mode suppression	S_{sc12}				
855,0 ... 995,0 MHz		22,0	29,0	—	dB
1710,0 ... 1930,0 MHz		20,0	25,0	—	dB
1930,0 ... 1975,0 MHz		18,0	20,0	—	dB
1975,0 ... 1990,0 MHz		16,0	18,0	—	dB
3420,0 ... 3980,0 MHz		22,0	28,0	—	dB
Attenuation	α				
DC ... 1600,0 MHz		28	33	—	dB
1600,0 ... 1830,0 MHz		25	28	—	dB
1830,0 ... 1910,0 MHz		10	11	—	dB
2010,0 ... 2070,0 MHz		6**	7**	—	dB
2070,0 ... 4000,0 MHz		23	25	—	dB
4000,0 ... 5000,0 MHz		18	20	—	dB
5000,0 ... 6000,0 MHz		16	19	—	dB

* the insertion attenuation includes also pcb losses of typ. 0,2dB

** 8dB min. (9dB typ.) for $T = -30$ to $+85^{\circ}\text{C}$



SAW Components

B7720


Low-Loss Filter for Mobile Communication

1960,0 MHz


Data Sheet



Transfer function (T=-10 ... 80 °C)(narrow band)

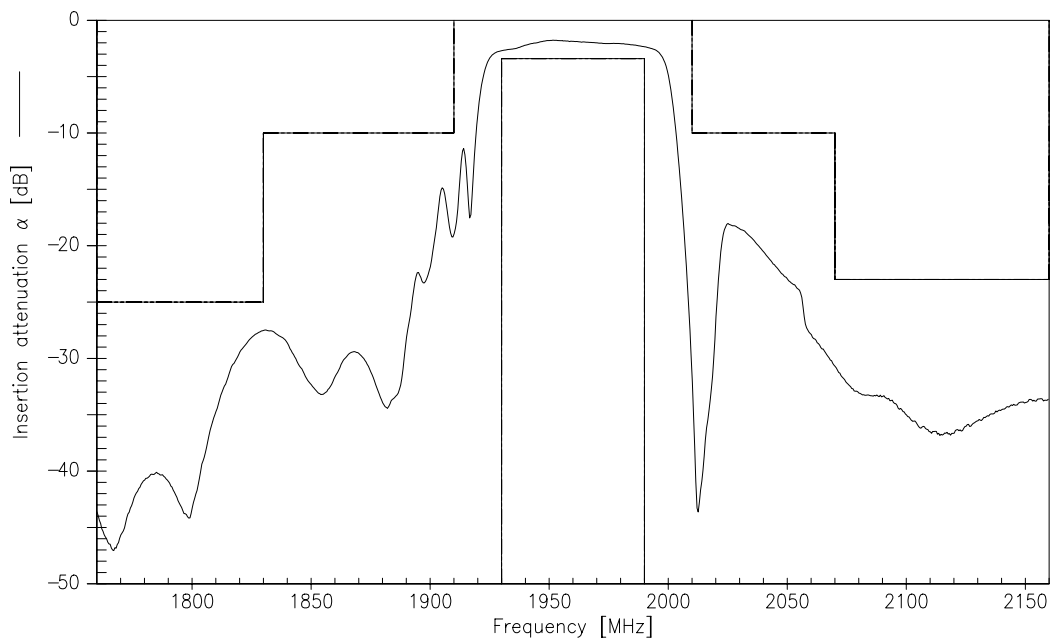

Transfer function (wide band)

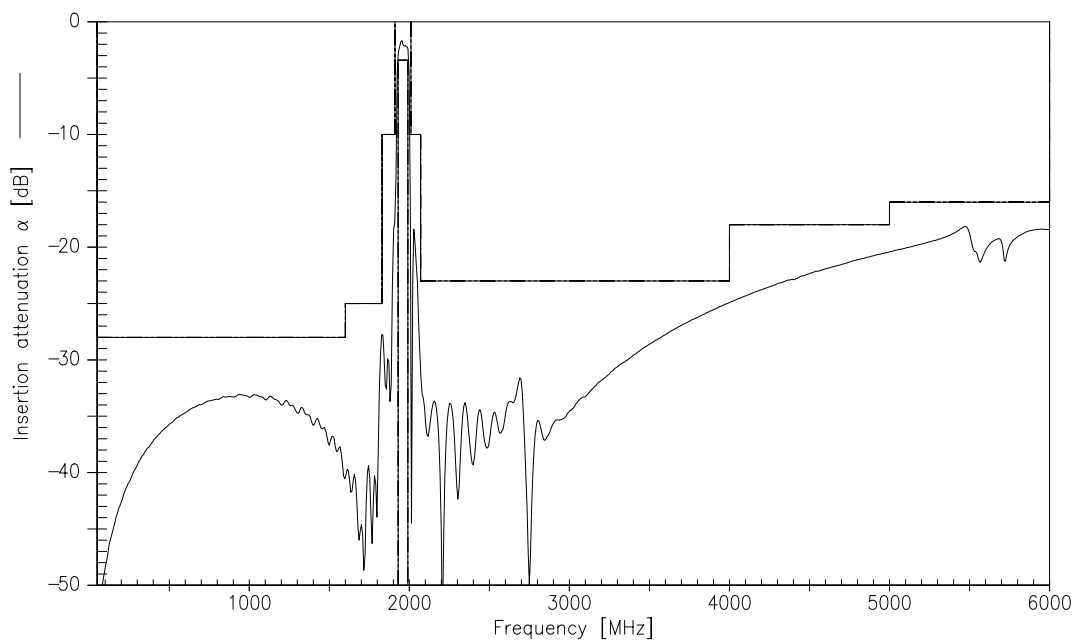



SAW Components

B7720

Low-Loss Filter for Mobile Communication


1960,0 MHz

Data Sheet




VSWR (T=-10 ... 80 °C)(narrow band)

Input

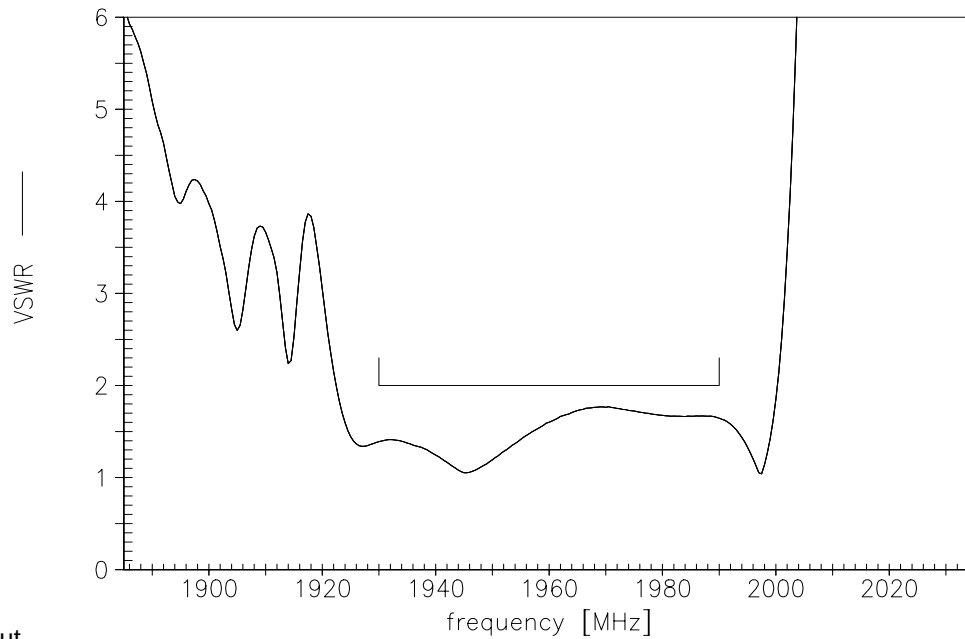

Output

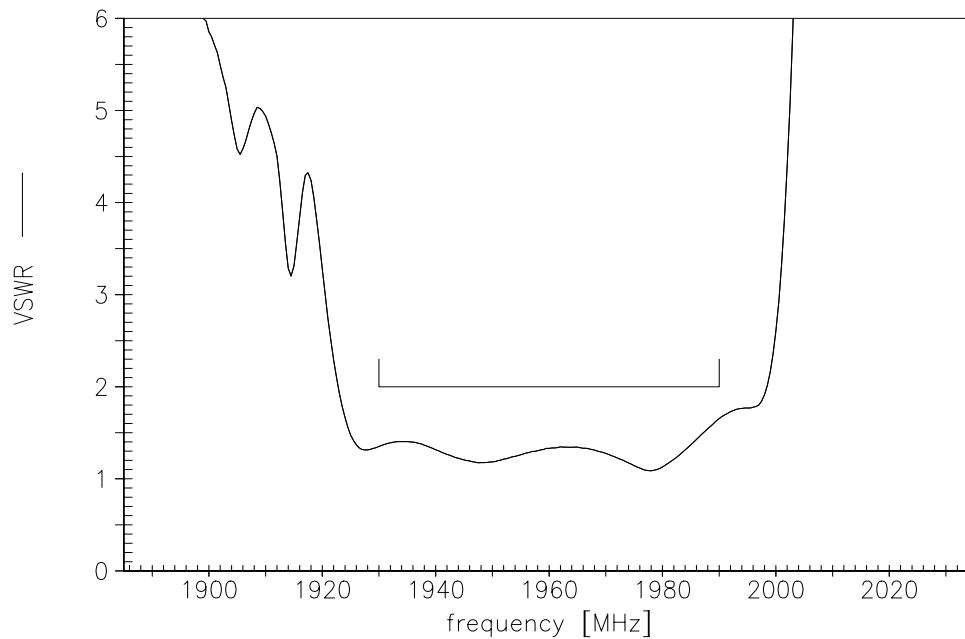



SAW Components

B7720

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.