

IS-7261	
REL.	1-28-66
REV.	

A-MP* EXTRACTION TOOL
NO. 1-305183-0 FOR A-MP
NASA-TYPE PATCHTIPS

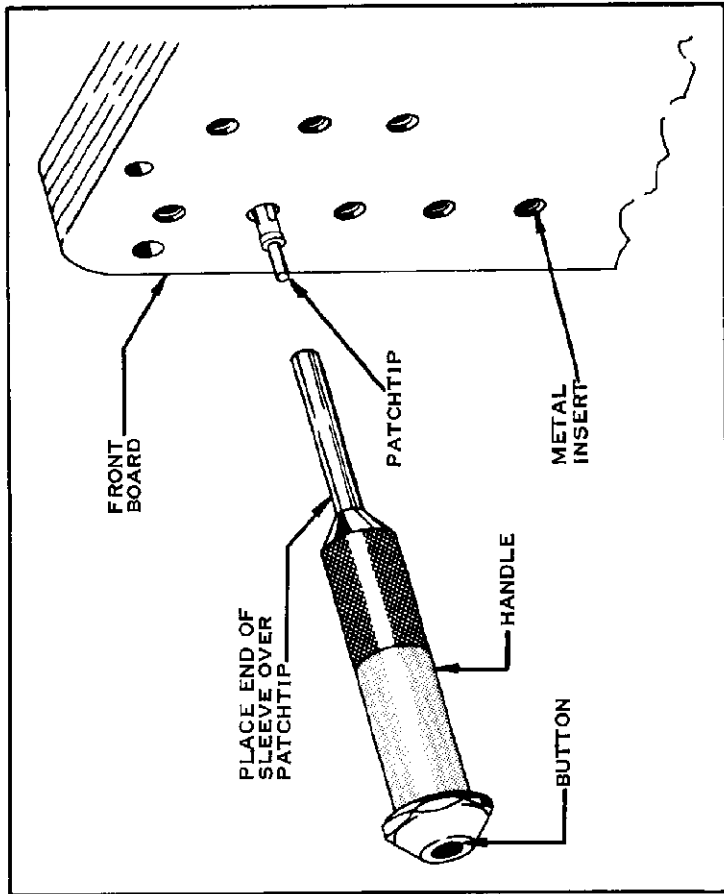


FIG. 1

1. Use this Tool (see Figure 1) to remove NASA-type Patchtips from front Boards with recessed metal inserts. It is recommended for A-MP Uninsulated (397434-1) and PIDG* (397050-1) Patchtips and A-MP Patchtips (420125-2) in shrouded Patch-cords. Correctly removed Patchtips are not damaged and may be used again. Read these instructions carefully before using the Tool.

2. EXTRACTION PROCEDURE

- Place end of Sleeve over Patchtip as shown in Figure 1.
- Push Sleeve into Cavity in Front Board until it bottoms on Metal Insert in Cavity. See Figure 2. Note that Push-Rod Button backs out of Handle.
- Rotate Handle several times.
- Keeping Sleeve bottomed on Insert, depress Push-Rod Button. As Button is depressed, Patchtip will be removed from Board.

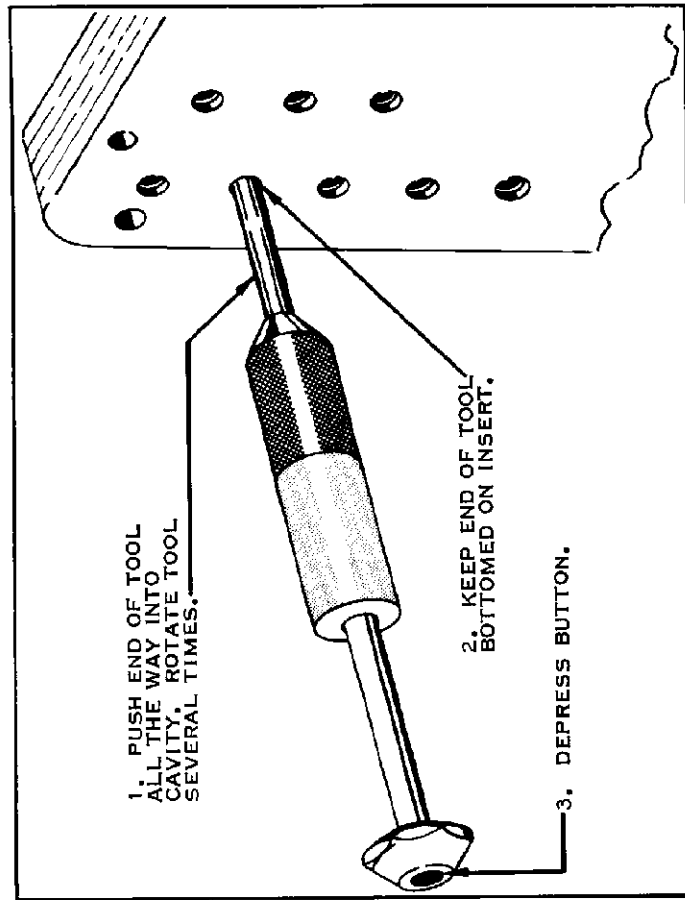


FIG. 2