







VDSL Transformers

For Use in ADSL POTS Low Pass Filters



-  Matched to Metalink's VDSL solution
-  B4033 for ANSI applications
-  B4034 for ETSI applications
-  Excellent return loss
-  Extended temperature range

Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C



Part Number	Turns Ratio		OCL Line @ 25°C (mH MIN)	DCR Line (Ω MAX)	Insertion Loss (dB MAX) 120 kHz - 12 MHz	Return Loss (mΩ MAX)		Isolation Voltage (Vrms)
	TX: Line	RX: Line				120 kHz - 12 MHz	12 MHz - 30 MHz	
B4033	1:3.0	2:3.0	1.00	1.14	0.4	12.0	6.0	1500
B4034	1:3.5	2:3.5	1.60	1.35	0.4	12.0	6.0	1500

Notes: Transformers are shipped in trays unless Tape & Reel packaging is specified by adding the suffix "T" to the part number (i.e. B4033T).

Mechanical

Schematic

B403X

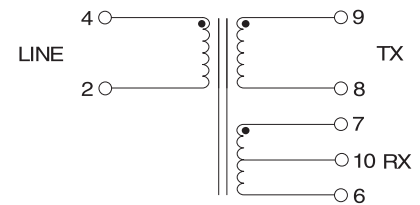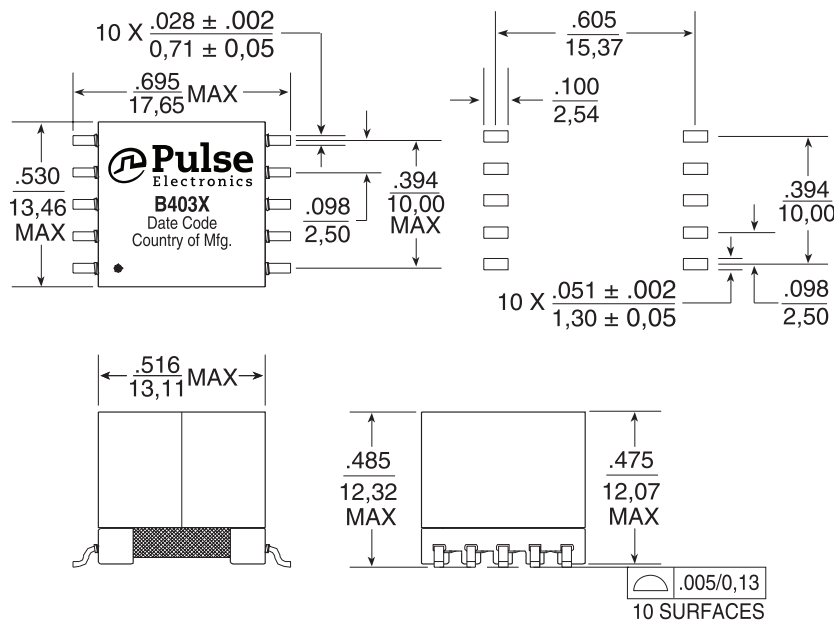

Weight6.2 grams
Tape & Reel150/reel
Tray60/tray

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,
 all tolerances are $\pm \frac{.010}{0,25}$

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
 San Diego, CA 92128
 U.S.A.

Tel: 858 674 8100
 Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
 D-71083 Herrenberg
 Germany

Tel: 49 7032 78060
 Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
 Aerospace Technology Bldg.
 10th Kejinan Road
 High-Tech Zone
 Nanshan District
 Shenzhen, PR China 518057

Tel: 86 755 33966678
 Fax: 86 755 33966700

Pulse North China

Room 2704/2705
 Super Ocean Finance Ctr.
 2067 Yan An Road West
 Shanghai 200336
 China

Tel: 86 21 62787060
 Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
 #03-02
 PM Industrial Bldg.
 Singapore 368363

Tel: 65 6287 8998
 Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
 Zhongyuan Road
 Zhongli City
 Taoyuan County 320
 Taiwan R. O. C.

Tel: 886 3 4356768
 Fax: 886 3 4356823 (Pulse)
 Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2012. Pulse Electronics, Inc. All rights reserved.