


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: AC 1000 V
 Operating Temperature: - 40° - +105° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: PBT
 Underplate: Nickel
 Contact Area: 100µ" Tin/Lead Free(Matte Tin)

AWHxG-02x2-IDC-R


Latches
 0 - without latches
 2 - with short latches
 3 - with long latches

 0 - w/o flange and
 E - w/ flange

Number of Contacts
 10/14/16/20/26/34/40/44/50

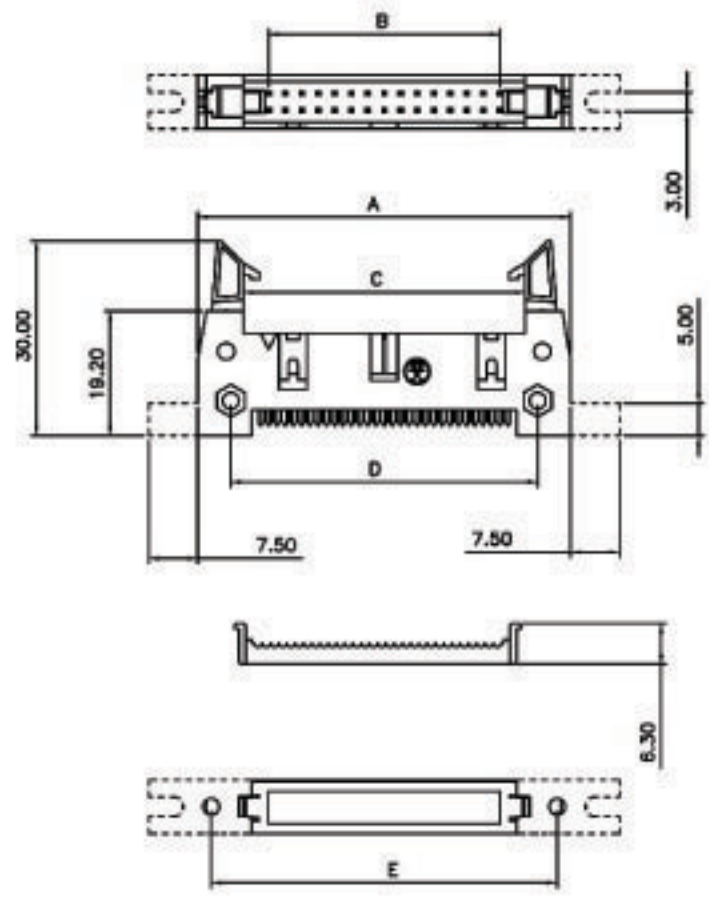

10. LATCH OPTION:

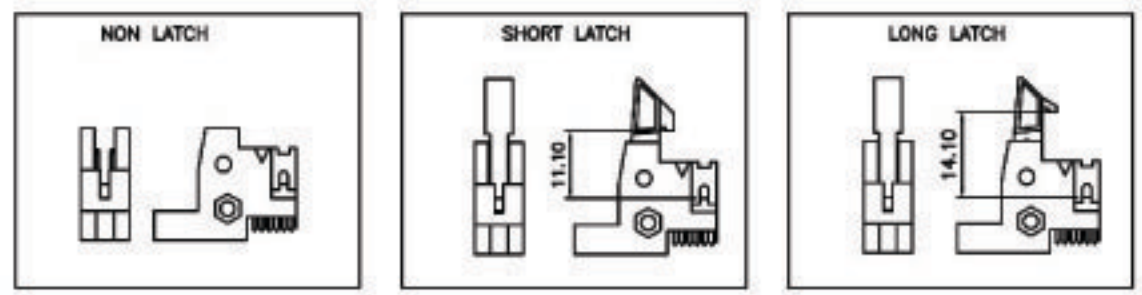

POSITION	10	14	16	20	24	26
A	35.96	37.80	39.62	44.74	49.82	52.22
B	18.16	23.24	17.70	22.86	27.94	30.48
C	17.96	23.04	23.50	30.64	35.74	38.28
D	23.84	26.98	29.46	34.54	39.62	42.16
E	25.40	30.48	33.82	38.10	43.18	46.26
POSITION	30	34	40	50	60	64
A	57.46	62.52	70.18	82.74	95.68	100.70
B	35.56	40.64	48.26	60.96	73.66	78.74
C	43.58	48.44	56.60	68.76	81.45	86.54
D	46.74	52.38	59.94	72.64	85.34	90.42
E	53.26	58.42	65.04	78.96	92.66	98.74

UNLESS OTHERWISE SPECIFIED TOLERANCE: ± 0.2

ASSMANN
Electronic Components

SCALE: AS SHOWN UNIT: mm

DRAWN: JOE DATE: 12/15/05 DRAWN NAME: DUAL ROW HEADER (Pitch:2.54mm)

CHECKED: / / IDC TYPE: 2/3

APPROVED: / / PRODUCT NO. AWHxG-02x2-IDC-R

REV. A FILE NAME:

REV.	DESCRIPTION	DATE
A	ECN-0512096(Emily)	12/14/05