


1586A Super-DAQ Precision Temperature Scanner



Extended Specifications

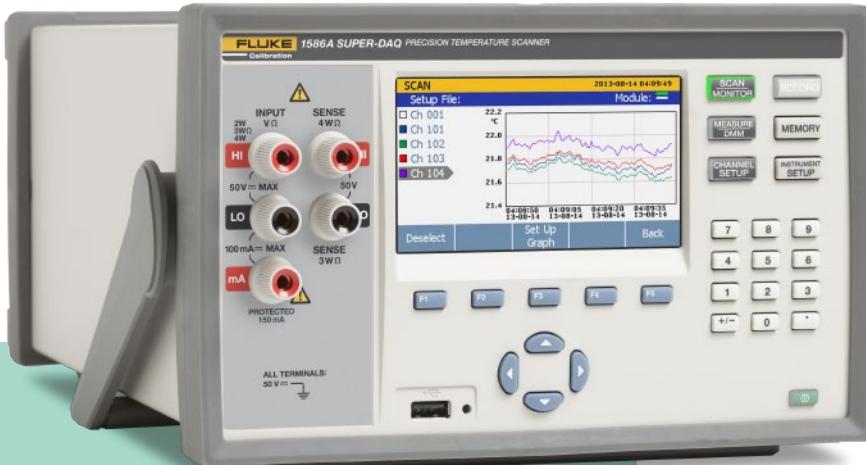

The 1586A Super-DAQ is the most accurate and flexible temperature data acquisition system on the market. It scans and records temperature, dc voltage, dc current, and resistance for up to 40 input channels and scan speeds as fast as 10 channels per second. The Super-DAQ can be configured for use as a multi-channel data logger in the factory or as a precision reference thermometer for benchtop sensor calibration in the lab.

- Measure thermocouples, PRTs, thermistors, dc voltage, dc current, and resistance
- Best-in-class temperature measurement accuracy:
 - PRTs: $\pm 0.005^\circ\text{C}$ (using external DAQ-STAQ Multiplexer)
 - Thermocouples: $\pm 0.5^\circ\text{C}$ (using High-Capacity Module and internal CJC)
 - Thermistors: $\pm 0.002^\circ\text{C}$
- Input Channels: Up to 40 isolated universal inputs
- Flexible configuration: Internal High-Capacity Module and/or DAQ-STAQ Multiplexer
- Selectable scan speed: Up to 10 channels per second
- Four modes of operation: Scan, Monitor, Measure, Digital Multimeter (DMM)
- Real-time color trending: Chart up to four channels simultaneously
- Automated sensor calibration: Control Fluke Calibration temperature sources such as dry-wells or micro-baths for automated calibration routines
- Data storage: Records up to 20 MB of data and setup files to internal non-volatile memory or to an external USB drive. Transfer data to a PC using the USB drive or LAN connection and view data in Microsoft® Excel
- Data security: Administrator and user profiles for protecting settings and ensuring test traceability
- Mx + B scaling and channel offset zero function
- Alarms: Two independent, user-defined alarms for each channel indicate when an upper or lower range has been exceeded


1586A Super-DAQ at a glance

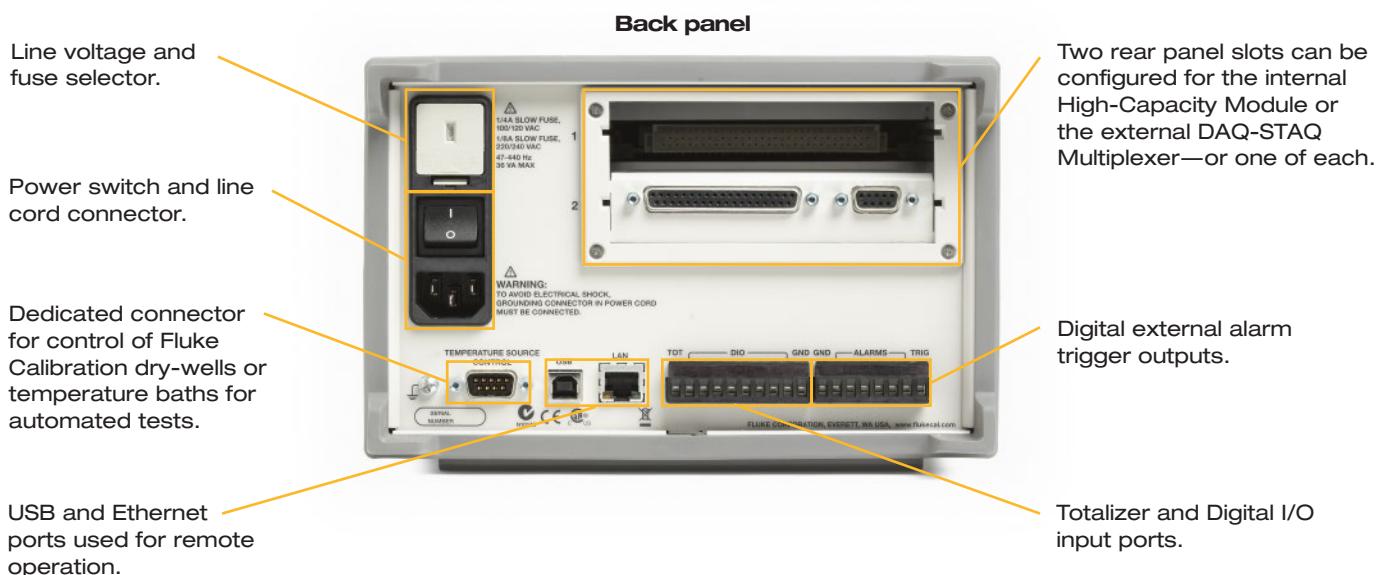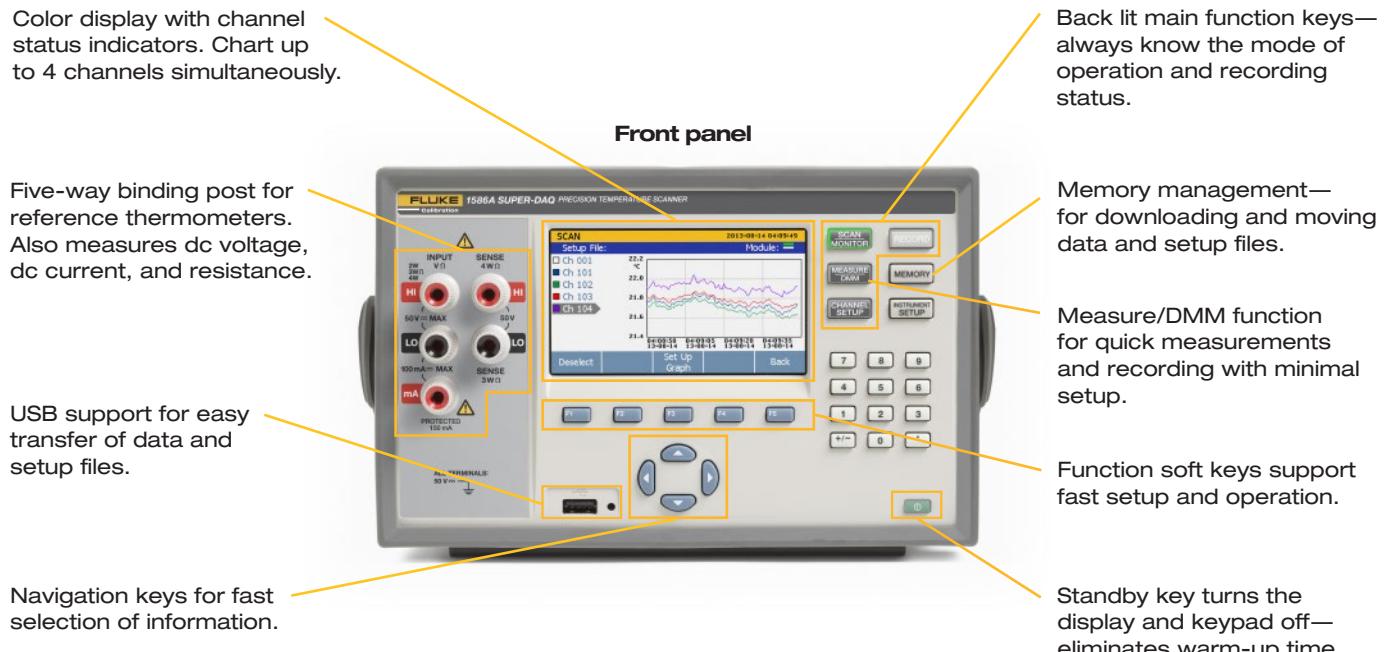

1586A modules at a glance

1586-2586 High-Capacity Module

Universal input channels designed to measure temperature, resistance, dc voltage, and dc current for data acquisition applications on the factory floor where channel count and scan speed are important.

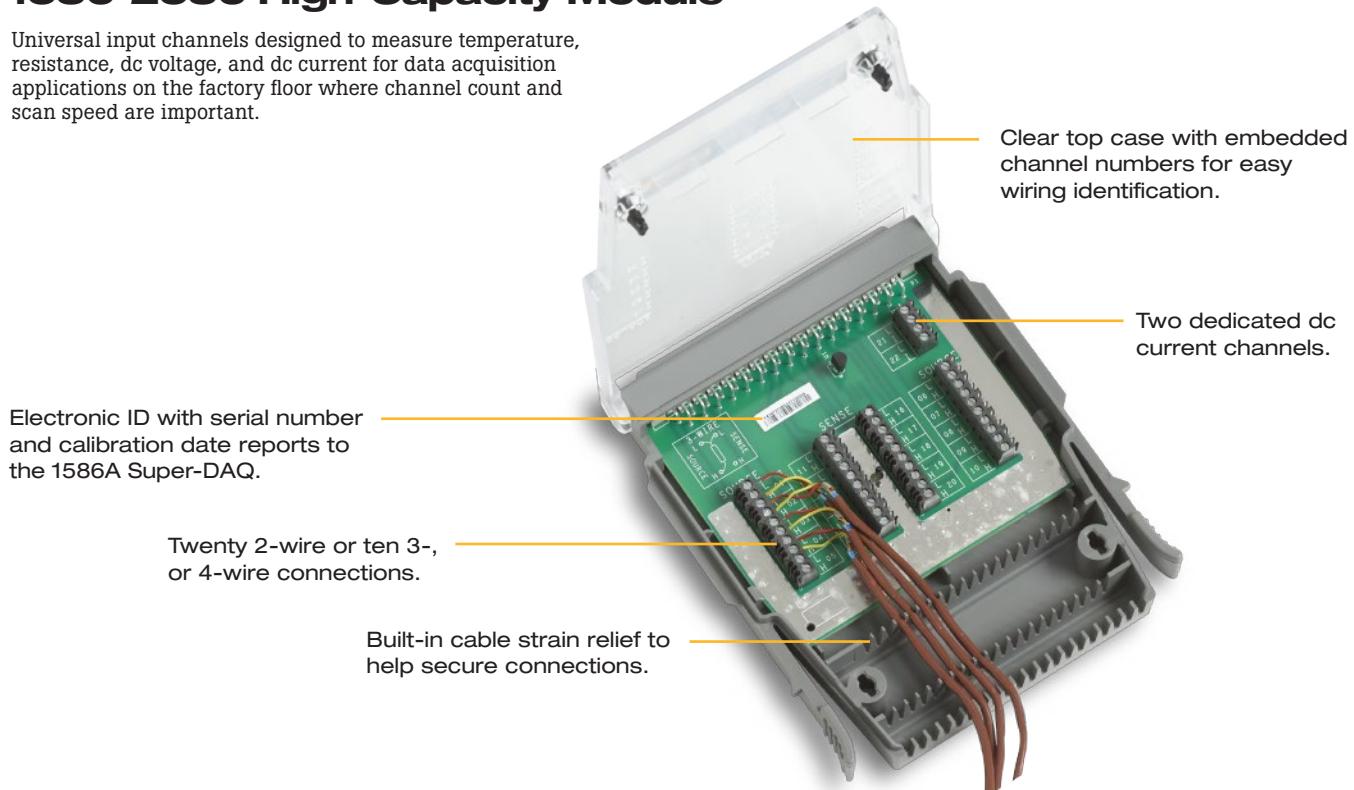

1586-2588 DAQ-STAQ Multiplexer

Designed for high-accuracy measurements in secondary temperature calibration labs. Easily connect/disconnect thermocouples, PRTs, and thermistors.



1586A Super-DAQ general specifications

| General | |
|-------------------------------------|---------|
| Maximum input | 50 V |
| Offset voltage | <2 µV |
| 3-wire internal resistance mismatch | <50 mΩ |
| Basic CJC accuracy | 0.25 °C |

| | | |
|---|--|--|
| Mains Voltage | 100 V Setting 120 V Setting 220 V Setting 240 V Setting | 90 V to 110 V 108 V to 132 V 198 V to 242 V 216 V to 264 V |
| Frequency | 47 Hz to 440 Hz | |
| Power Consumption | 36 VA peak (24 W average) | |
| Environment Temperature | Operating Full accuracy Storage | 0 °C to 50 °C 18 °C to 28 °C −20 °C to 70 °C |
| Warm-up | 1 hour to full accuracy specifications | |
| Relative Humidity (non-condensing) | Operating Storage | 0 °C to 30 °C <80 % 30 °C to 50 °C <50 % −20 °C to 70 °C <95 % |
| Altitude | Operating Storage | 2,000 m 12,000 m |
| Vibration and Shock | Complies with MIL-PRF-28800F Class 3 | |
| Channel Capacity | Total analog channels Voltage/resistance channels Current channels Digital I/O Totalizer Alarm outputs Trigger input | 45 41 5 8 bits 1 6 1 |
| Input Protection | 50 V all functions, terminals and ranges | |
| Math Channels | Number of channels Operations | 20 sum, difference, multiply, divide, polynomial, power, square root, reciprocal, exponential, logarithm, absolute value, average, maximum, minimum |
| Triggers | Interval, external (trigger input), alarm, remote (bus), manual, automated test | |
| Memory | Scan data RAM Data/Setup flash memory | 75,000 readings with timestamp 20 MB |
| USB Host Port | Connector type Function File system Memory capacity | Type A Memory FAT32 32 GB |
| USB Device Port | Connector type Class Function Command protocol | Type B Instrument Control and data transfer SCPI |

| | | |
|-------------------|--------------------------------|--------------------------------------|
| LAN | Function | Control and data transfer |
| | Network protocols | Ethernet 10/100, TCP/IP |
| | Command protocol | SCPI |
| RS-232 | Connector | D-sub 9 pin (DE-9) |
| | Baud rates | 1200, 2400, 4800, 9600, 19200, 38400 |
| | Function | Temperature source control output |
| Dimensions | Height | 150 mm |
| | Width | 245 mm |
| | Depth | 385 mm |
| | Weight | 6 kg (typical configuration) |
| | Shipping weight | 9.5 kg (typical configuration) |
| Conformity | CE, CSA, IEC 61010 3rd edition | |

1586-2586 High-Capacity Module specifications

| General | |
|-------------------------------------|--------|
| Maximum input | 50 V |
| Offset voltage | <2 µV |
| 3-wire internal resistance mismatch | <50 mΩ |
| Basic CJC accuracy | 0.6 °C |

1586-2588 DAQ-STAQ Multiplexer specifications

| General | |
|-------------------------------------|---------|
| Maximum input | 50 V |
| Offset voltage | <2 µV |
| 3-wire internal resistance mismatch | <50 mΩ |
| Basic CJC accuracy | 0.25 °C |

Measurement specifications

Accuracy specifications generally apply with medium and slow sample rates (unless otherwise noted), after a warm-up time of 1 hour, and within an environment temperature range of 18 °C to 28 °C, and may depend on the channel. The confidence level for accuracy specifications is 95% within one year of calibration.

| | | |
|--|--|--|
| Scan rate | Fast | 10 channels per second max (0.1 seconds per channel) |
| | Medium | 1 channel per second (1 second per channel) |
| | Slow | 4 seconds per channel |
| Display resolution | 4 ½ to 6 ½ digits, depending on function and Sample Rate (see Measurement Characteristics tables below to find the display resolution of temperature readings) | |
| PRT/RTD | | |
| Temperature range | –200 °C to 1200 °C (depending on the sensor) | |
| Resistance range | 0 Ω to 4 kΩ | |
| Offset compensation | 0 Ω to 400 Ω, 4-wire | automatic current reversal |
| | 400 Ω to 4000 Ω or 3-wire | none |
| Source current reversal interval (0 Ω to 400 Ω range) | Fast sample rate | 2 ms |
| | Medium sample rate | 250 ms |
| | Slow sample rate | 250 ms |
| Maximum lead resistance (4-wire Ω) | 2.5% of range per lead for 400 Ω and 4 kΩ ranges. | |

PRT/RTD resistance accuracy

Accuracy is given as % of measurement or ohms, whichever is greater. Basic accuracy is for 4-wire PRT/RTD. When using 3-wire PRT/RTD add 0.013 Ω to the accuracy specification for internal resistance mismatch and voltage offset if using Channel 1, or add 0.05 Ω if using channels x01 through x20. If the environment temperature is outside the specified range, multiply the temperature coefficient numbers by the temperature deviation and add to the accuracy specification.

| Range | Sample Rate | DAQ-STAQ Multiplexer and Channel 1 | High-Capacity Module | T.C./ °C Outside 18 °C to 28 °C |
|---------------|-------------|------------------------------------|----------------------|---------------------------------|
| 0 Ω to 400 Ω | Slow | 0.002 % or 0.0008 Ω | 0.003 % or 0.003 Ω | 0.0001 % or 0.0008 Ω |
| | Medium | 0.002 % or 0.002 Ω | 0.003 % or 0.003 Ω | 0.0001 % or 0.0008 Ω |
| | Fast | 0.002 % or 0.005 Ω | 0.003 % or 0.006 Ω | 0.0001 % or 0.0008 Ω |
| 400 Ω to 4 kΩ | Slow | 0.004 % or 0.06 Ω | 0.006 % or 0.06 Ω | 0.0001 % or 0.008 Ω |
| | Medium | 0.004 % or 0.1 Ω | 0.006 % or 0.1 Ω | 0.0001 % or 0.008 Ω |
| | Fast | 0.004 % or 0.18 Ω | 0.006 % or 0.18 Ω | 0.0001 % or 0.008 Ω |

PRT/RTD temperature accuracy

Accuracy is for 4-wire 100 Ω nominal PRT/RTD. When using 3-wire PRT/RTD add 0.039 °C to the accuracy specification for internal resistance mismatch and voltage offset if using Channel 1, or add 0.15 °C if using channels x01 through x20. If the environment temperature is outside the specified range, multiply the temperature coefficient number by the temperature deviation and add to the accuracy specification. Linear interpolation may be used between points in the table. Specifications do not include sensor accuracy. The practical range of temperature measurement depends on the sensor and characterization.

| Sample Rate | Temperature | DAQ-STAQ Multiplexer and Channel 1 | High-Capacity Module | T.C./ °C Outside 18 °C to 28 °C |
|-------------|-------------|------------------------------------|----------------------|---------------------------------|
| Slow | -200 °C | 0.002 °C | 0.008 °C | 0.002 °C |
| | 0 °C | 0.005 °C | 0.008 °C | 0.003 °C |
| | 300 °C | 0.012 °C | 0.018 °C | 0.006 °C |
| | 600 °C | 0.02 °C | 0.03 °C | 0.01 °C |
| Medium | -200 °C | 0.005 °C | 0.008 °C | 0.002 °C |
| | 0 °C | 0.005 °C | 0.008 °C | 0.003 °C |
| | 300 °C | 0.012 °C | 0.018 °C | 0.006 °C |
| | 600 °C | 0.02 °C | 0.03 °C | 0.01 °C |
| Fast | -200 °C | 0.013 °C | 0.015 °C | 0.002 °C |
| | 0 °C | 0.013 °C | 0.015 °C | 0.003 °C |
| | 300 °C | 0.014 °C | 0.018 °C | 0.006 °C |
| | 600 °C | 0.02 °C | 0.03 °C | 0.01 °C |

PRT/RTD measurement characteristics

| Range | Temperature Display Resolution | | Source Current |
|---------------|--------------------------------|------------------|----------------|
| | Slow / Medium Sample Rate | Fast Sample Rate | |
| 0 Ω to 400 Ω | 0.001 °C | 0.01 °C | ±1 mA |
| 400 Ω to 4 kΩ | 0.001 °C | 0.01 °C | 0.1 mA |

| Thermistor | |
|-------------------|---|
| Temperature range | -200 °C to 400 °C (depending on the sensor) |
| Resistance range | 0 Ω to 1 MΩ |

Thermistor resistance accuracy

Accuracy is given as \pm (% of measurement + Ω). The basic accuracy specification is for 4-wire thermistor, slow sample rate. When using medium or fast sample rate, add the number given in the table to the accuracy specification. If the environment temperature is outside the specified range, multiply the temperature coefficient numbers by the temperature deviation and add to the accuracy specification. For 2-wire thermistor add 0.02 Ω internal resistance if using Channel 1 or 1.5 Ω if using channels x01 through x20, and add external lead wire resistance.

| Range | Slow Sample Rate | Medium Sample Rate | Fast Sample Rate | T.C./ °C Outside 18 °C to 28 °C |
|---------------------------------|------------------------|--------------------|------------------|---------------------------------|
| 0 Ω to 2.2 k Ω | 0.004 % + 0.2 Ω | add 0.3 Ω | add 1 Ω | 0.0005 % + 0.05 Ω |
| 2.1 k Ω to 98 k Ω | 0.004 % + 0.5 Ω | add 0.5 Ω | add 1.3 Ω | 0.0005 % + 0.1 Ω |
| 95 k Ω to 1 M Ω | 0.015 % + 5 Ω | add 5 Ω | add 13 Ω | 0.001 % + 2 Ω |

Thermistor temperature accuracy

Accuracy specifications are for 4-wire thermistor. When using 2-wire thermistor, add the number given in the table to the specification for internal resistance. If the environment temperature is outside the specified range, increase the accuracy specification by 25% for every 1 °C outside the specified environment temperature range. Specifications do not include sensor accuracy. The practical range of temperature measurement depends on the sensor.

| Range | Accuracy 2.2 k Ω Thermistor | | | |
|--------|------------------------------------|--------------------|------------------|--------------|
| | Slow Sample Rate | Medium Sample Rate | Fast Sample Rate | 2-wire |
| -40 °C | 0.001 °C | 0.001 °C | 0.01 °C | add 0.001 °C |
| 0 °C | 0.003 °C | 0.004 °C | 0.01 °C | add 0.004 °C |
| 25 °C | 0.006 °C | 0.011 °C | 0.02 °C | add 0.016 °C |
| 50 °C | 0.008 °C | 0.018 °C | 0.04 °C | add 0.05 °C |
| 100 °C | 0.047 °C | 0.114 °C | 0.28 °C | add 0.34 °C |
| 150 °C | 0.23 °C | 0.56 °C | 1.34 °C | add 1.7 °C |

| Range | Accuracy 5 k Ω Thermistor | | | |
|--------|----------------------------------|--------------------|------------------|--------------|
| | Slow Sample Rate | Medium Sample Rate | Fast Sample Rate | 2-wire |
| -40 °C | 0.003 °C | 0.004 °C | 0.01 °C | add 0.001 °C |
| 0 °C | 0.002 °C | 0.002 °C | 0.01 °C | add 0.002 °C |
| 25 °C | 0.004 °C | 0.006 °C | 0.01 °C | add 0.007 °C |
| 50 °C | 0.005 °C | 0.009 °C | 0.02 °C | add 0.022 °C |
| 100 °C | 0.022 °C | 0.052 °C | 0.13 °C | add 0.16 °C |
| 150 °C | 0.096 °C | 0.24 °C | 0.57 °C | add 0.7 °C |

| Range | Accuracy 10 k Ω Thermistor | | | |
|--------|-----------------------------------|--------------------|------------------|--------------|
| | Slow Sample Rate | Medium Sample Rate | Fast Sample Rate | 2-wire |
| -40 °C | 0.003 °C | 0.004 °C | 0.01 °C | add 0.001 °C |
| 0 °C | 0.002 °C | 0.002 °C | 0.01 °C | add 0.002 °C |
| 25 °C | 0.003 °C | 0.004 °C | 0.01 °C | add 0.004 °C |
| 50 °C | 0.005 °C | 0.009 °C | 0.02 °C | add 0.011 °C |
| 100 °C | 0.011 °C | 0.024 °C | 0.06 °C | add 0.067 °C |
| 150 °C | 0.04 °C | 0.098 °C | 0.24 °C | add 0.29 °C |

Thermistor measurement characteristics

| Range | Temperature Display Resolution | | Source Current |
|-----------------|--------------------------------|------------------|----------------|
| | Slow / Medium Sample Rate | Fast Sample Rate | |
| 0 Ω to 2.2 kΩ | 0.0001 °C | 0.001 °C | 10 μA |
| 2.1 kΩ to 98 kΩ | 0.0001 °C | 0.001 °C | 10 μA |
| 95 kΩ to 1 MΩ | 0.0001 °C | 0.001 °C | 1 μA |

| Thermocouple | |
|-------------------|--|
| Temperature range | -200 °C to 2315 °C (depending on the sensor) |
| Voltage range | -15 mV to 100 mV |

Thermocouple voltage accuracy

Accuracy is given as $\pm (|0\% \text{ of measurement}| + \mu\text{V})$. Basic accuracy specification is for medium or slow sample rate. When using a fast sample rate add the number given in the table to the accuracy specification. If the environment temperature is outside the specified range, multiply the temperature coefficient numbers by the temperature deviation and add to the accuracy specification.

| Range | Accuracy Channel 1 | Ch. x01 – x20 | Fast Sample Rate | T.C./ °C Outside 18 °C to 28 °C |
|------------------|--------------------|---------------|------------------|---------------------------------|
| -15 mV to 100 mV | 0.004 % + 4 μV | add 2 μV | add 1 μV | 0.0005 % + 0.0005 mV |

Thermocouple reference junction accuracy

| Module | CJC Accuracy | T.C./ °C Outside 18 °C to 28 °C |
|----------------------|--------------|---------------------------------|
| DAQ-STAQ Multiplexer | 0.25 °C | 0.02 °C |
| High-Capacity Module | 0.6 °C | 0.05 °C |

Thermocouple temperature accuracy

Accuracy specifications apply using medium or slow sample rate. When using fast sample rate, increase the accuracy specification by 25%. If the environment temperature is outside the specified range, increase the accuracy specification by 12% for every 1 °C outside the specified environment temperature range. Accuracy with fixed/external CJC does not include the accuracy of the reference junction temperature. Linear interpolation may be used between points in the table. Specifications do not include sensor accuracy. The practical range of temperature measurement depends on the sensor.

| Type (Range) | Temperature | Accuracy | | | |
|-------------------------|-------------|----------------------|---------------|----------------------|----------------------|
| | | Fixed / External CJC | | Internal CJC | |
| | | Channel 1 | Ch. x01 – x20 | DAQ-STAQ Multiplexer | High-Capacity Module |
| K -270 °C to 1372 °C | -200 °C | 0.28 °C | 0.41 °C | 0.76 °C | 1.60 °C |
| | 0 °C | 0.10 °C | 0.15 °C | 0.29 °C | 0.62 °C |
| | 1000 °C | 0.14 °C | 0.20 °C | 0.32 °C | 0.64 °C |
| T -270 °C to 400 °C | -200 °C | 0.27 °C | 0.40 °C | 0.76 °C | 1.60 °C |
| | 0 °C | 0.10 °C | 0.15 °C | 0.30 °C | 0.65 °C |
| | 200 °C | 0.08 °C | 0.12 °C | 0.23 °C | 0.47 °C |
| R -50 °C to 1768 °C | 400 °C | 0.08 °C | 0.11 °C | 0.20 °C | 0.41 °C |
| | 0 °C | 0.76 °C | 1.13 °C | 1.16 °C | 1.28 °C |
| | 300 °C | 0.42 °C | 0.63 °C | 0.64 °C | 0.71 °C |
| S -50 °C to 1768 °C | 1200 °C | 0.33 °C | 0.47 °C | 0.48 °C | 0.52 °C |
| | 1600 °C | 0.34 °C | 0.49 °C | 0.50 °C | 0.54 °C |
| | 0 °C | 0.74 °C | 1.11 °C | 1.14 °C | 1.26 °C |
| J -210 °C to 1200 °C | 300 °C | 0.45 °C | 0.67 °C | 0.68 °C | 0.76 °C |
| | 1200 °C | 0.37 °C | 0.54 °C | 0.55 °C | 0.60 °C |
| | 1600 °C | 0.39 °C | 0.56 °C | 0.57 °C | 0.63 °C |
| N -270 °C to 1300 °C | -200 °C | 0.20 °C | 0.29 °C | 0.65 °C | 1.41 °C |
| | 0 °C | 0.08 °C | 0.12 °C | 0.28 °C | 0.61 °C |
| | 1000 °C | 0.11 °C | 0.14 °C | 0.25 °C | 0.53 °C |
| E -270 °C to 1000 °C | -200 °C | 0.17 °C | 0.25 °C | 0.64 °C | 1.42 °C |
| | 0 °C | 0.07 °C | 0.10 °C | 0.27 °C | 0.61 °C |
| | 300 °C | 0.06 °C | 0.09 °C | 0.21 °C | 0.46 °C |
| B 100 °C to 1820 °C | 700 °C | 0.08 °C | 0.10 °C | 0.21 °C | 0.45 °C |
| | 300 °C | 1.32 °C | 1.97 °C | 1.97 °C | 1.97 °C |
| | 600 °C | 0.68 °C | 1.02 °C | 1.02 °C | 1.02 °C |
| C 0 °C to 2315 °C | 1200 °C | 0.41 °C | 0.60 °C | 0.60 °C | 0.60 °C |
| | 1600 °C | 0.38 °C | 0.55 °C | 0.55 °C | 0.55 °C |
| | 600 °C | 0.23 °C | 0.33 °C | 0.37 °C | 0.54 °C |
| D 0 °C to 2315 °C | 1200 °C | 0.28 °C | 0.40 °C | 0.45 °C | 0.63 °C |
| | 2000 °C | 0.44 °C | 0.60 °C | 0.66 °C | 0.91 °C |
| | 600 °C | 0.22 °C | 0.32 °C | 0.34 °C | 0.44 °C |
| G 0 °C to 2315 °C | 1200 °C | 0.26 °C | 0.36 °C | 0.39 °C | 0.49 °C |
| | 2000 °C | 0.39 °C | 0.53 °C | 0.56 °C | 0.69 °C |
| | 600 °C | 0.24 °C | 0.36 °C | 0.36 °C | 0.36 °C |
| L -200 °C to 900 °C | 1200 °C | 0.22 °C | 0.32 °C | 0.32 °C | 0.33 °C |
| | 2000 °C | 0.33 °C | 0.46 °C | 0.46 °C | 0.46 °C |
| | -200 °C | 0.13 °C | 0.19 °C | 0.45 °C | 0.99 °C |
| M -50 °C to 1410 °C | 0 °C | 0.08 °C | 0.12 °C | 0.28 °C | 0.62 °C |
| | 800 °C | 0.09 °C | 0.12 °C | 0.23 °C | 0.48 °C |
| | 500 °C | 0.11 °C | 0.16 °C | 0.30 °C | 0.64 °C |
| U -200 °C to 600 °C | 1000 °C | 0.10 °C | 0.15 °C | 0.25 °C | 0.51 °C |
| | 400 °C | 0.08 °C | 0.11 °C | 0.21 °C | 0.41 °C |
| | -200 °C | 0.25 °C | 0.37 °C | 0.71 °C | 1.48 °C |
| W 0 °C to 2315 °C | 0 °C | 0.10 °C | 0.15 °C | 0.30 °C | 0.63 °C |
| | 400 °C | 0.08 °C | 0.11 °C | 0.20 °C | 0.40 °C |
| | 600 °C | 0.24 °C | 0.36 °C | 0.36 °C | 0.36 °C |
| O °C to 2315 °C | 1200 °C | 0.22 °C | 0.32 °C | 0.32 °C | 0.33 °C |
| | 2000 °C | 0.33 °C | 0.46 °C | 0.46 °C | 0.46 °C |

Thermocouple measurement characteristics

| Range | Temperature Display Resolution | |
|--------------------|--------------------------------|------------------|
| | Slow / Medium Sample Rate | Fast Sample Rate |
| -270 °C to 2315 °C | 0.01 °C | 0.1 °C |

| DC voltage | |
|-----------------------|---|
| Maximum input | 50 V on any range |
| Common mode rejection | 140 dB at 50 Hz or 60 Hz (1 kΩ unbalance in LOW lead) ± 50 V peak maximum |
| Normal mode rejection | 55 dB for power line frequency ± 0.1%, ± 120% of range peak maximum |
| A/D linearity | 2 ppm of measurement + 1 ppm of range |
| Input bias current | 30 pA at 25 °C |

DC voltage accuracy

Accuracy is given as \pm (% measurement + % of range). Basic accuracy specification is for Channel 1, medium or slow sample rate. For channels x01 through x20 or when using Fast sample rate, add the numbers given in the table to the accuracy specification. If the environment temperature is outside the specified range, multiply the temperature coefficient numbers by the temperature deviation and add to the accuracy specification.

| Range | Accuracy Channel 1 | Ch. x01 – x20 | Fast Sample Rate | T.C./ °C Outside 18 °C to 28 °C |
|---------|-----------------------|---------------|-----------------------|------------------------------------|
| ±100 mV | 0.0037 % + 0.0035 % | add 2 µV | add 0.0008 % of range | 0.0005 % + 0.0005 % |
| ±1 V | 0.0025 % + 0.0007 % | add 2 µV | add 0.0008 % of range | 0.0005 % + 0.0001 % |
| ±10 V | 0.0024 % + 0.0005 % | – | add 0.0008 % of range | 0.0005 % + 0.0001 % |
| ±50 V | 0.0038 % + 0.0012 % | – | add 0.0008 % of range | 0.0005 % + 0.0001 % |

DC voltage input characteristics

| Range | Resolution | | Input Impedance |
|---------|---------------|--------|--------------------|
| | Slow / Medium | Fast | |
| ±100 mV | 0.1 µV | 1 µV | 10 GΩ ¹ |
| ±1 V | 1 µV | 10 µV | 10 GΩ ¹ |
| ±10 V | 10 µV | 100 µV | 10 GΩ ¹ |
| ±50 V | 100 µV | 1 mV | 10 MΩ ±1 % |

¹ Input beyond ±12 V is clamped. The clamp current is up to 3 mA.

| DC current | |
|------------------|-----------------------|
| Input protection | 0.15 A resettable PTC |

DC current accuracy

Accuracy is given as \pm (% measurement + % of range). Basic accuracy specification is for medium or slow sample rate. When using a fast sample rate, add the number given in the table to the accuracy specification. If the environment temperature is outside the specified range, multiply the temperature coefficient numbers by the temperature deviation and add to the accuracy specification.

| Range | Accuracy | Fast Sample Rate | T.C./ °C Outside 18 °C to 28 °C |
|---------|--------------------|-----------------------|------------------------------------|
| ±100 µA | 0.015 % + 0.0035 % | add 0.0008 % of range | 0.002 % + 0.001 % |
| ±1 mA | 0.015 % + 0.0011 % | add 0.0008 % of range | 0.002 % + 0.001 % |
| ±10 mA | 0.015 % + 0.0035 % | add 0.0008 % of range | 0.002 % + 0.001 % |
| ±100 mA | 0.015 % + 0.0035 % | add 0.0008 % of range | 0.002 % + 0.001 % |

DC current input characteristics

| Range | Resolution | | Burden Voltage |
|---------|---------------|--------|----------------|
| | Slow / Medium | Fast | |
| ±100 µA | 0.1 nA | 1 nA | < 1 mV |
| ±1 mA | 1 nA | 10 nA | < 1 mV |
| ±10 mA | 10 nA | 100 nA | < 1 mV |
| ±100 mA | 100 nA | 1 µA | < 1 mV |

Resistance

Max. lead resistance (4-wire ohms) 10 Ω per lead for 100 Ω and 1 kΩ ranges. 1 kΩ per lead on all other ranges

Resistance accuracy

Accuracy is given as ± (% measurement + % of range). Basic accuracy specification is for 4-wire resistance, medium or slow sample rate. For 2-wire resistance add 0.02 Ω internal resistance if using Channel 1, or 1.5 Ω if using channels x01 through x20, and add external lead wire resistance. When using fast sample rate, add the numbers given in the table to the accuracy specification. If the environment temperature is outside the specified range, multiply the temperature coefficient numbers by the temperature deviation and add to the accuracy specification.

| Range | Accuracy | Fast Sample Rate | T.C./ °C Outside 18 °C to 28 °C |
|--------|--------------------|--|------------------------------------|
| 100 Ω | 0.004 % + 0.0035 % | add 0.001 % of range | 0.0001 % + 0.0005 % |
| 1 kΩ | 0.003 % + 0.001 % | add 0.001 % of range | 0.0001 % + 0.0001 % |
| 10 kΩ | 0.004 % + 0.001 % | add 0.001 % of range | 0.0001 % + 0.0001 % |
| 100 kΩ | 0.004 % + 0.001 % | add 0.001 % of range | 0.0001 % + 0.0001 % |
| 1 MΩ | 0.006 % + 0.001 % | add 0.002 % of reading plus 0.0008 % of range | 0.0005 % + 0.0002 % |
| 10 MΩ | 0.015 % + 0.001 % | add 0.002 % of reading plus 0.0008 % of range | 0.001 % + 0.0004 % |
| 100 MΩ | 0.8 % + 0.01 % | add 0.001 % of range | 0.05 % + 0.002 % |

Resistance input characteristics

| Range | Resolution | | Source Current (open-circuit voltage) |
|--------|---------------|--------|--|
| | Slow / Medium | Fast | |
| 100 Ω | 0.1 mΩ | 1 mΩ | 1 mA (4 V) |
| 1 kΩ | 1 mΩ | 10 mΩ | 1 mA (4 V) |
| 10 kΩ | 10 mΩ | 100 mΩ | 100 µA (6 V) |
| 100 kΩ | 100 mΩ | 1 Ω | 100 µA (12 V) |
| 1 MΩ | 1 Ω | 10 Ω | 10 µA (12 V) |
| 10 MΩ | 10 Ω | 100 Ω | 1 µA (12 V) |
| 100 MΩ | 100 Ω | 1 kΩ | 0.1 µA (12 V) |

Ordering information

1586A Super-DAQ Precision Temperature Scanner

Super-DAQ and DAQ-STAQ Multiplexer

1586A/1DS

Super-DAQ, 1 DAQ-STAQ Multiplexer

1586A/1DS/C

Super-DAQ, 1 DAQ-STAQ Multiplexer,
Accredited Calibration

1586A/2DS

Super-DAQ, 2 DAQ-STAQ Multiplexers

1586A/2DS/C

Super-DAQ, 2 DAQ-STAQ Multiplexers,
Accredited Calibration

Super-DAQ and High-Capacity Module

1586A/1HC

Super-DAQ, 1 High-Capacity Module

1586A/1HC/C

Super-DAQ, 1 High-Capacity Module,
Accredited Calibration

1586A/2HC

Super-DAQ, 2 High-Capacity Modules

1586A/2HC/C

Super-DAQ, 2 High-Capacity Modules,
Accredited Calibration



Super-DAQ, High-Capacity Module, and DAQ-STAQ Multiplexer

1586A/DS-HC

Super-DAQ, 1 High-Capacity Module, 1 DAQ-STAQ Multiplexer

1586A/DSHC/C

Super-DAQ, 1 High-Capacity Module, 1 DAQ-STAQ Multiplexer,
Accredited Calibration

Accessories

1586-2586

High-Capacity Module without Relay Card

1586-2586-KIT

High-Capacity Module with Relay Card

1586-2588

DAQ-STAQ Multiplexer without Adapter Card

1586-2588-KIT

DAQ-STAQ Multiplexer, Adapter Card, Interface Cable

1586-2588-CBL

DAQ-STAQ Multiplexer Interface Cable

Y1586S

Rack Mount Kit, Single (half rack)

Y1586D

Rack Mount Kit, Dual (full rack)

1586-CASE

Super-DAQ Carrying Case (mainframe and internal modules)

1586/DS-CASE

Super-DAQ/DAQ-STAQ Carrying Case (mainframe and external module)

Fluke Calibration. Precision, performance, confidence.™

| | | | | | |
|-----------------|----|------------------|----------|------|----------|
| ▼ Electrical | RF | Temperature ▼ | Pressure | Flow | Software |
|-----------------|----|------------------|----------|------|----------|

Fluke Calibration
PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Europe B.V.
PO Box 1186, 5602 BD
Eindhoven, The Netherlands

For more information call:
In the U.S.A. (877) 355-3225 or
Fax (425) 446-5116
In Europe/M-East/Africa +31 (0) 40
2675 200 or Fax +31 (0) 40 2675 222
In Canada (800)-36-FLUKE or
Fax (905) 890-6866

From other countries +1 (425) 446-5500 or
Fax +1 (425) 446-5116
Web access: <http://www.flukecal.com>

©2013 Fluke Calibration.
Specifications subject to change without notice.
Printed in U.S.A. 9/2013 6000790B_EN
Pub-ID 12118-eng

Modification of this document is not permitted
without written permission from Fluke Calibration.