

Interface relays and optocouplers

Product group picture

5



Interface relays and optocouplers

Table of contents

Interface Relays and Optocouplers	
Pluggable interface relays	5/3
Table of contents	5/4
Benefits and advantages	5/5
Approvals and marks	5/6
Ordering details	5/7
Technical data	5/14
Technical data, Load limit curves	5/16
Load limit curves	5/17
Connection diagrams	5/18
Interface relays and optocouplers R500 / R600 range	5/21
Table of contents	5/22
Benefits and advantages	5/23
Type designators	5/24
Interface relays and optocouplers R500 range	5/25
Table of contents	5/26
Interface relays R500 range	5/27
Table of contents	5/28
Selection	5/29
Ordering details	5/30
Technical information	5/31
Optocouplers R500 range	5/33
Table of contents	5/34
Selection	5/35
Ordering details	5/36
Connection diagrams	5/37
Technical data	5/38
Interface relays and optocouplers R600 range	5/45
Table of contents	5/46
Interface relays R600 range	5/47
Table of contents	5/48
Benefits and advantages	5/49
Selection	5/51
Ordering details	5/53
Connection diagrams	5/55
Technical data	5/56
General technical data	5/61
Dimensional drawings, Load limit curves	5/62
Optocouplers R600 range	5/63
Table of contents	5/64
Selection	5/65
Ordering details	5/67
Connection diagrams	5/68
Technical data	5/69

Pluggable interface relays

Product group picture

5



Pluggable interface relays

Table of contents

Pluggable interface relays	
Product group picture	5/3
Table of contents	5/4
Benefits and advantages	5/5
Approvals and marks	5/6
Ordering details	5/7
Technical data	5/14
Technical data, Load limit curves	5/16
Load limit curves	5/17
Connection diagrams	5/18

Pluggable interface relays

Benefits and advantages

Pluggable pcb relays CR-P


- 9 different coil voltages
 - DC versions: 12 V, 24 V, 48 V, 110 V
 - AC versions: 24 V, 48 V, 110 V, 120 V, 230 V
- Output contacts:
 - 1 c/o contact (16 A) or
 - 2 c/o contacts (8 A) optionally equipped with gold contacts
- Logical or standard sockets
- Cadmium-free contact material
- Width of socket: 15,5 mm
- Pluggable function modules
 - Reverse polarity protection/ Free wheeling diode
 - LED indication
 - RC elements
 - Overvoltage protection

Pluggable miniature relays CR-M


- 12 different coil voltages
 - DC versions: 12 V, 24 V, 48 V, 60 V, 110 V, 125 V, 220 V
 - AC versions: 24 V, 48 V, 110 V, 120 V, 230 V
- Output contacts
 - 2 c/o contacts (12 A) or
 - 3 c/o contacts (10 A) or
 - 4 c/o contacts (6 A) optionally equipped with gold contacts, LED and free wheeling diode
- Integrated test button for manual actuation and locking of the output contacts (blue = DC, orange = AC) that can be removed if necessary
- With or without integrated LED
- Logical or standard sockets
- Cadmium-free contact material
- Width on socket: 27 mm
- Pluggable function modules
 - Reverse polarity protection/ Free wheeling diode
 - LED indication
 - RC elements
 - Overvoltage protection

Pluggable universal relays CR-U

- 12 different coil voltages
 - DC versions: 12 V, 24 V, 48 V, 110 V, 125 V, 220 V
 - AC versions: 24 V, 48 V, 60 V, 110 V, 120 V, 230 V
- Output contacts
 - 2 c/o contacts (10 A) or
 - 3 c/o contacts (10 A)
- Integrated test button for manual actuation and locking of the output contacts (blue = DC, orange = AC) that can be removed if necessary
- With or without integrated LED
- Cadmium-free contact material
- Width on socket: 38 mm
- Pluggable function modules
 - Reverse polarity protection/ Free wheeling diode
 - LED indication
 - RC elements
 - Overvoltage protection
 - Multifunction time module

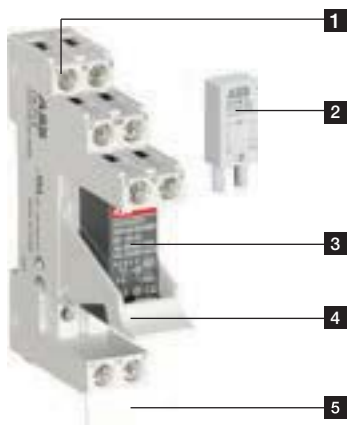

- 1** Socket
- 2** Pluggable function module
- 3** Interface relay
- 4** Holder
- 5** Marker label

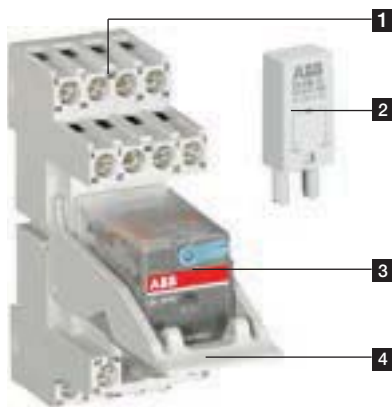

- 1** Socket
- 2** Pluggable function module
- 3** Interface relay
- 4** Holder



- 1** Socket
- 2** Pluggable function module
- 3** Interface relay
- 4** Holder

Pluggable interface relays

Approvals and marks

Kinds of sockets

Standard sockets - Position of connecting terminals:


Coil connection (A1-A2) on lower socket side,
contact connections (n/o and n/c contacts)
on the lower and upper socket side.

Logical sockets - Position of connecting terminals:


Coil connection (A1-A2) on lower socket side,
all contact connections (common contacts,
n/o and n/c contacts) on upper socket side.

Details see connection diagrams


Kind of connecting terminals



Screw type



Spring type



Fork type

Approvals and marks

■ existing □ pending		Relays			Sockets								Modules	
Approvals		CR-P	CR-M	CR-U		CR-PLS CR-PSS	CR-PLC	CR-M..L. CR-M..SS	CR-M..SF	CR-U..S CR-U..E	CR-U..SM		CR-P/M	CR-U
	UL 508	■	■ ¹⁾	■										
	CAN/CSA C22.2 No.14	■	■ ²⁾	■		■	■	■	■	■	■		■ ⁶⁾	■ ⁷⁾
	CAN/CSA C22.2 No.14	■	■ ³⁾	■										
	VDE	■	■ ⁴⁾	■										
	GOST	■	■	■		■	■	■	■	■	■		■	■
	Lloyds Register		■ ⁵⁾	■										
	CCC	■	■	■										
	RMRS	■	■ ⁸⁾	■ ⁸⁾		■	■	■	■	■	■			
Marks														
	CE	■	■	■		■	■	■	■	■	■		■	■

¹⁾ except 60 V DC and 125 V DC devices with gold contacts

²⁾ except devices with gold contacts

³⁾ except 60 V DC and 125 V DC devices

⁴⁾ except 125 V DC devices

⁵⁾ only devices with 4 c/o contacts

⁶⁾ except CR-P/M 42B, CR-P/M 42BV, CR-P/M 42C, CR-P/M 42CV, CR-P/M 52D, CR-P/M 62E, CR-P/M 62EV, CR-P/M 62D, CR-P/M 62DV

⁷⁾ except CR-U 41B, CR-U 41BV, CR-U 41C, CR-U 41CV, CR-U 51D, CR-U 61CV, CR-U 61E, CR-U 61EV, CR-U 61D, CR-U 61DV, CR-U 91C, CR-U T

⁸⁾ except 60 V and 125 V devices

Pluggable interface relays

Ordering details



CR-P

2CDC 291 045 F0004

Description

Interface relays are widely used in various industrial applications:

As an interface they link the electronic controlling, e.g. PLC (programmable logic controller), PC or field bus systems, to the sensor / actuator level. Here, they take on various functions: Switching of AC or DC loads with different resistive, inductive and capacitive parts, switching voltages from a few mV up to 250 V, switching currents from a few mA up to 16 A, amplification of weak control signals, electrical isolation of control and load circuits, and signal multiplying. In contrast to electronic switching devices, interface relays don't use additional internal protective circuits and thus are overload-proof against short-time variations like current or voltage peaks.


Ordering details - CR-P range

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
12 V DC	1 c/o (SPDT)	250 V, 16 A	CR-P012DC1	1SVR405600R4000		10	0.014 (0.031)
24 V DC			CR-P024DC1	1SVR405600R1000			
48 V DC			CR-P048DC1	1SVR405600R6000			
110 V DC			CR-P110DC1	1SVR405600R8000			
24 V AC			CR-P024AC1	1SVR405600R0000			
48 V AC			CR-P048AC1	1SVR405600R5000			
110 V AC			CR-P110AC1	1SVR405600R7000			
120 V AC			CR-P120AC1	1SVR405600R2000			
230 V AC			CR-P230AC1	1SVR405600R3000			
12 V DC	2 c/o (SPDT)	250 V, 8 A	CR-P012DC2	1SVR405601R4000		10	0.014 (0.031)
24 V DC			CR-P024DC2	1SVR405601R1000			
48 V DC			CR-P048DC2	1SVR405601R6000			
110 V DC			CR-P110DC2	1SVR405601R8000			
24 V AC			CR-P024AC2	1SVR405601R0000			
48 V AC			CR-P048AC2	1SVR405601R5000			
110 V AC			CR-P110AC2	1SVR405601R7000			
120 V AC			CR-P120AC2	1SVR405601R2000			
230 V AC			CR-P230AC2	1SVR405601R3000			
24 V DC	2 c/o (SPDT) gold contact	250 V, 8 A	CR-P024DC2	1SVR405606R1000		10	0.014 (0.031)
24 V AC			CR-P024AC2G	1SVR405606R0000			
110 V AC			CR-P110AC2G	1SVR405606R7000			
230 V AC			CR-P230AC2G	1SVR405606R3000			



CR-PLS

2CDC 291 006 F0011



CR-PJ

2CDC 291 004 F0007

Ordering details - Accessories

Version	Connection terminal	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Logical socket with protective separation	screw	CR-PLS	1SVR405650R0000		10	0.045 (0.099)
Logical socket	screw	CR-PLSx	1SVR405650R0100			0.043 (0.095)
	spring	CR-PLC	1SVR405650R0200			0.042 (0.093)
Standard socket	screw	CR-PSS	1SVR405650R1000		10	0.038 (0.084)
Plastic holder for socket		CR-PH	1SVR405659R0000			0.002 (0.004)
Jumper bar for sockets with screw connection		CR-PJ	1SVR405658R5000			0.018 (0.040)
Marker		CR-PM	1SVR405658R0000		10	0.0002 (0.0004)

Bold printed products = stocked products

Pluggable interface relays

Ordering details



CR-M

2CDC 291 046 F0004

Description

Interface relays are widely used in various industrial applications:

As an interface they link the electronic controlling, e.g. PLC (programmable logic controller), PC or field bus systems, to the sensor / actuator level. Here, they take on various functions: Switching of AC or DC loads with different resistive, inductive and capacitive parts, switching voltages from a few mV up to 250 V, switching currents from a few mA up to 16 A, amplification of weak control signals, electrical isolation of control and load circuits, and signal multiplying. In contrast to electronic switching devices, interface relays don't use additional internal protective circuits and thus are overload-proof against short-time variations like current or voltage peaks.

Ordering details - CR-M range without LED

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
12 V DC	2 c/o (SPDT)	250 V, 12 A	CR-M012DC2	1SVR405611R4000		10	0.033 (0.073)
24 V DC			CR-M024DC2	1SVR405611R1000			
48 V DC			CR-M048DC2	1SVR405611R6000			
60 V DC			CR-M060DC2	1SVR405611R4200			
110 V DC			CR-M110DC2	1SVR405611R8000			
125 V DC			CR-M125DC2	1SVR405611R8200			
220 V DC			CR-M220DC2	1SVR405611R9000			
24 V AC			CR-M024AC2	1SVR405611R0000			
48 V AC			CR-M048AC2	1SVR405611R5000			
110 V AC			CR-M110AC2	1SVR405611R7000			
120 V AC			CR-M120AC2	1SVR405611R2000			
230 V AC			CR-M230AC2	1SVR405611R3000			
12 V DC	3 c/o (SPDT)	250 V, 10 A	CR-M012DC3	1SVR405612R4000		10	0.033 (0.073)
24 V DC			CR-M024DC3	1SVR405612R1000			
48 V DC			CR-M048DC3	1SVR405612R6000			
60 V DC			CR-M060DC3	1SVR405612R4200			
110 V DC			CR-M110DC3	1SVR405612R8000			
125 V DC			CR-M125DC3	1SVR405612R8200			
220 V DC			CR-M220DC3	1SVR405612R9000			
24 V AC			CR-M024AC3	1SVR405612R0000			
48 V AC			CR-M048AC3	1SVR405612R5000			
60 V AC			CR-M060AC3	1SVR405612R5200			
110 V AC			CR-M110AC3	1SVR405612R7000			
120 V AC			CR-M120AC3	1SVR405612R2000			
230 V AC			CR-M230AC3	1SVR405612R3000			
12 V DC	4 c/o (SPDT)	250 V, 6 A	CR-M012DC4	1SVR405613R4000		10	0.033 (0.073)
24 V DC			CR-M024DC4	1SVR405613R1000			
48 V DC			CR-M048DC4	1SVR405613R6000			
60 V DC			CR-M060DC4	1SVR405613R4200			
110 V DC			CR-M110DC4	1SVR405613R8000			
125 V DC			CR-M125DC4	1SVR405613R8200			
220 V DC			CR-M220DC4	1SVR405613R9000			
24 V AC			CR-M024AC4	1SVR405613R0000			
48 V AC			CR-M048AC4	1SVR405613R5000			
110 V AC			CR-M110AC4	1SVR405613R7000			
120 V AC			CR-M120AC4	1SVR405613R2000			
230 V AC			CR-M230AC4	1SVR405613R3000			

Bold printed products = stocked products

Pluggable interface relays

Ordering details



CR-M

2CDC 291 046 F0004

Ordering details - CR-M range

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
12 V DC	2 c/o (SPDT) with LED	250 V, 12 A	CR-M012DC2L	1SVR405611R4100		10	0.033 (0.073)
24 V DC			CR-M024DC2L	1SVR405611R1100			
48 V DC			CR-M048DC2L	1SVR405611R6100			
60 V DC			CR-M060DC2L	1SVR405611R4300			
110 V DC			CR-M110DC2L	1SVR405611R8100			
125 V DC			CR-M125DC2L	1SVR405611R8300			
220 V DC			CR-M220DC2L	1SVR405611R9100			
24 V AC			CR-M024AC2L	1SVR405611R0100			
48 V AC			CR-M048AC2L	1SVR405611R5100			
110 V AC			CR-M110AC2L	1SVR405611R7100			
120 V AC			CR-M120AC2L	1SVR405611R2100			
230 V AC			CR-M230AC2L	1SVR405611R3100			
12 V DC	3 c/o (SPDT) with LED	250 V, 10 A	CR-M012DC3L	1SVR405612R4100		10	0.033 (0.073)
24 V DC			CR-M024DC3L	1SVR405612R1100			
48 V DC			CR-M048DC3L	1SVR405612R6100			
60 V DC			CR-M060DC3L	1SVR405612R4300			
110 V DC			CR-M110DC3L	1SVR405612R8100			
125 V DC			CR-M125DC3L	1SVR405612R8300			
220 V DC			CR-M220DC3L	1SVR405612R9100			
24 V AC			CR-M024AC3L	1SVR405612R0100			
48 V AC			CR-M048AC3L	1SVR405612R5100			
110 V AC			CR-M110AC3L	1SVR405612R7100			
120 V AC			CR-M120AC3L	1SVR405612R2100			
230 V AC			CR-M230AC3L	1SVR405612R3100			
12 V DC	4 c/o (SPDT) with LED	250 V, 6 A	CR-M012DC4L	1SVR405613R4100		10	0.033 (0.073)
24 V DC			CR-M024DC4L	1SVR405613R1100			
48 V DC			CR-M048DC4L	1SVR405613R6100			
60 V DC			CR-M060DC4L	1SVR405613R4300			
110 V DC			CR-M110DC4L	1SVR405613R8100			
125 V DC			CR-M125DC4L	1SVR405613R8300			
220 V DC			CR-M220DC4L	1SVR405613R9100			
24 V AC			CR-M024AC4L	1SVR405613R0100			
48 V AC			CR-M048AC4L	1SVR405613R5100			
110 V AC			CR-M110AC4L	1SVR405613R7100			
120 V AC			CR-M120AC4L	1SVR405613R2100			
230 V AC2			CR-M230AC4L	1SVR405613R3100			
24 V DC	4 c/o (SPDT), LED and free-wheeling diode	250 V, 6 A	CR-M024DC4LD	1SVR405614R1100		10	0.033 (0.073)
24 V DC	4 c/o (SPDT), gold contacts	250 V, 6 A	CR-M024DC4G	1SVR405618R1000		10	0.033 (0.073)
24 V AC			CR-M024AC4G	1SVR405618R0000			
110 V AC			CR-M110AC4G	1SVR405618R7000			
230 V AC			CR-M230AC4G	1SVR405618R3000			

Bold printed products = stocked products

Pluggable interface relays

Ordering details



CR-M

2CDC 291 048 F0004


Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
12 V DC	4 c/o (SPDT) with gold contacts and LED	250 V / 6 A	CR-M012DC4LG	1SVR405618R4100		10	0.033 (0.073)
24 V DC			CR-M024DC4LG	1SVR405618R1100			
48 V DC			CR-M048DC4LG	1SVR405618R6100			
60 V DC			CR-M060DC4LG	1SVR405618R4300			
110 V DC			CR-M110DC4LG	1SVR405618R8100			
125 V DC			CR-M125DC4LG	1SVR405618R8300			
220 V DC			CR-M220DC4LG	1SVR405618R9100			
24 V AC			CR-M024AC4LG	1SVR405618R0100			
48 V AC	CR-M048AC4LG	1SVR405618R5100					
110 V AC	CR-M110AC4LG	1SVR405618R7100					
120 V AC	CR-M120AC4LG	1SVR405618R2100					
230 V AC	CR-M230AC4LG	1SVR405618R3100					
12 V DC	4 c/o (SPDT) with gold contacts, LED and free-wheeling diode		CR-M012DC4LDG	1SVR405618R4400		10	0.033 (0.073)
24 V DC			CR-M024DC4LDG	1SVR405618R1400			

5



CR-M4SS

2CDC 291 009 F0011



CR-MJ

Ordering details - Accessories

Version	Connection terminal	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Logical socket for 2 c/o	screw	CR-M2LS	1SVR405651R1100		10	0.055 (0.121)
Logical socket for 3 c/o		CR-M3LS	1SVR405651R2100			0.062 (0.137)
Logical socket for 2/4 c/o		CR-M4LS	1SVR405651R3100			0.066 (0.146)
Logical socket for 2 c/o	spring	CR-M2LC	1SVR405651R1200		10	0.065 (0.143)
Logical socket for 2/4 c/o		CR-M4LC	1SVR405651R3200			0.066 (0.146)
Standard socket for 2 c/o	screw	CR-M2SS	1SVR405651R1000		10	0.066 (0.146)
Standard socket for 3 c/o		CR-M3SS	1SVR405651R2000			0.068 (0.150)
Standard socket for 2/4 c/o		CR-M4SS	1SVR405651R3000			0.070 (0.154)
Standard socket for 2 c/o	fork type	CR-M2SF	1SVR405651R1300		10	0.040 (0.088)
Standard socket for 2/4 c/o		CR-M4SF	1SVR405651R3300			0.048 (0.106)
Plastic holder		CR-MH	1SVR405659R1000		10	0.003 (0.007)
Metal holder		CR-MH1	1SVR405659R1100		10	0.0005 (0.001)
Jumper bar for sockets with screw connection		CR-MJ	1SVR405658R6000		10	0.029 (0.064)
Marker		CR-MM	1SVR405658R1000		10	0.0005 (0.001)

Bold printed products = stocked products

Pluggable interface relays

Ordering details



2CDC 291 005 S0011


CR-P/M ...

5


Ordering details - CR-P/M range (all products stocked)

Rated control supply voltage	Description	Version	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
6-220 V DC	Diode - Reverse polarity protection/ free wheeling diode	A1+, A2-	CR-P/M 22	1SVR405651R0000		10	0.003 (0.007)
6-24 V DC	Diode and LED - Reverse polarity protection/ free wheeling diode	red, A1+, A2-	CR-P/M 42	1SVR405652R0000		10	0.003 (0.007)
		green, A1+, A2-	CR-P/M 42V	1SVR405652R1000			
24-60 V DC		red, A1+, A2-	CR-P/M 42B	1SVR405652R4000			
		green, A1+, A2-	CR-P/M 42BV	1SVR405652R4100			
110 V DC		red, A1+, A2-	CR-P/M 42C	1SVR405652R9000			
		green, A1+, A2-	CR-P/M 42CV	1SVR405652R9100			
6-24 V AC	Spark quenching		CR-P/M 52B	1SVR405653R0000		10	0.003 (0.007)
24-60 V AC			CR-P/M 52D	1SVR405653R4000			
110-230 V AC/DC			CR-P/M 52C	1SVR405653R1000			
6-24 V AC/DC	Diode, LED and reverse polarity protection	red, for DC A1+, A2-	CR-P/M 62	1SVR405654R0000		10	0.003 (0.007)
		green, for DC A1+, A2-	CR-P/M 62V	1SVR405654R1000			
24-60 V AC/DC		red, for DC A1+, A2-	CR-P/M 62E	1SVR405654R4000			
		green, for DC A1+, A2-	CR-P/M 62EV	1SVR405654R4100			
110 V DC		red, for DC A1+, A2-	CR-P/M 92	1SVR405654R0100			
110-230 V AC		green, for DC A1+, A2-	CR-P/M 92V	1SVR405654R1100			
6-24 V AC/DC	Varistor and LED Overvoltage protection	red, for DC A1+, A2-	CR-P/M 62C	1SVR405655R0000		10	0.003 (0.007)
		green, for DC A1+, A2-	CR-P/M 62CV	1SVR405655R1000			
24-60 V AC/DC		red, for DC A1+, A2-	CR-P/M 62D	1SVR405655R4000			
		green, for DC A1+, A2-	CR-P/M 62DV	1SVR405655R4100			
110 V DC		red, for DC A1+, A2-	CR-P/M 92C	1SVR405655R0100			
110-230 V AC		green, for DC A1+, A2-	CR-P/M 92CV	1SVR405655R1100			
24 V AC	Overvoltage protection		CR-P/M 72	1SVR405656R0000		10	0.002 (0.004)
115 V AC			CR-P/M 72A	1SVR405656R1000			
230 V AC			CR-P/M 82	1SVR405656R2000			


Connection diagrams




CR-P/M 22




CR-P/M 42, CR-P/M 42C, CR-P/M 42B, CR-P/M 42V, CR-P/M 42BV, CR-P/M 42CV




CR-P/M 52B, CR-P/M 52D, CR-P/M 52C



CR-P/M 62, CR-P/M 92, CR-P/M 62E, CR-P/M 62V, CR-P/M 62EV, CR-P/M 92V



CR-P/M 62C, CR-P/M 92C, CR-P/M 62D, CR-P/M 62CV, CR-P/M 62DV, CR-P/M 92CV



CR-P/M 72, CR-P/M 72A, CR-P/M 82

Pluggable interface relays

Ordering details



2CDC 291 047 F0004

CR-U

Description

Interface relays are widely used in various industrial applications:

As an interface they link the electronic controlling, e.g. PLC (programmable logic controller), PC or field bus systems, to the sensor / actuator level. Here, they take on various functions: Switching of AC or DC loads with different resistive, inductive and capacitive parts, switching voltages from a few mV up to 250 V, switching currents from a few mA up to 16 A, amplification of weak control signals, electrical isolation of control and load circuits, and signal multiplying. In contrast to electronic switching devices, interface relays don't use additional internal protective circuits and thus are overload-proof against short-time variations like current or voltage peaks.

Ordering details - CR-U range

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
12 V DC	2 c/o without LED	250 V, 10 A	CR-U012DC2	1SVR405621R4000		10	0.083 (0.183)
24 V DC			CR-U024DC2	1SVR405621R1000			
48 V DC			CR-U048DC2	1SVR405621R6000			
110 V DC			CR-U110DC2	1SVR405621R8000			
220 V DC			CR-U220DC2	1SVR405621R9000			
24 V AC			CR-U024AC2	1SVR405621R0000			
48 V AC			CR-U048AC2	1SVR405621R5000			
110 V AC			CR-U110AC2	1SVR405621R7000			
120 V AC			CR-U120AC2	1SVR405621R2000			
230 V AC			CR-U230AC2	1SVR405621R3000			
12 V DC	3 c/o without LED	250 V, 10 A	CR-U012DC3	1SVR405622R4000		10	0.083 (0.183)
24 V DC			CR-U024DC3	1SVR405622R1000			
48 V DC			CR-U048DC3	1SVR405622R6000			
110 V DC			CR-U110DC3	1SVR405622R8000			
125 V DC			CR-U125DC3	1SVR405622R8200			
220 V DC			CR-U220DC3	1SVR405622R9000			
24 V AC			CR-U024AC3	1SVR405622R0000			
48 V AC			CR-U048AC3	1SVR405622R5000			
60 V AC			CR-U060AC3	1SVR405622R5200			
110 V AC			CR-U110AC3	1SVR405622R7000			
120 V AC			CR-U120AC3	1SVR405622R2000			
230 V AC			CR-U230AC3	1SVR405622R3000			
12 V DC	2 c/o with LED	250 V, 10 A	CR-U012DC2L	1SVR405621R4100		10	0.083 (0.183)
24 V DC			CR-U024DC2L	1SVR405621R1100			
48 V DC			CR-U048DC2L	1SVR405621R6100			
110 V DC			CR-U110DC2L	1SVR405621R8100			
220 V DC			CR-U220DC2L	1SVR405621R9100			
24 V AC			CR-U024AC2L	1SVR405621R0100			
48 V AC			CR-U048AC2L	1SVR405621R5100			
110 V AC			CR-U110AC2L	1SVR405621R7100			
120 V AC			CR-U120AC2L	1SVR405621R2100			
230 V AC			CR-U230AC2L	1SVR405621R3100			
12 V DC	3 c/o with LED	250 V, 10 A	CR-U012DC3L	1SVR405622R4100		10	0.083 (0.183)
24 V DC			CR-U024DC3L	1SVR405622R1100			
48 V DC			CR-U048DC3L	1SVR405622R6100			
110 V DC			CR-U110DC3L	1SVR405622R8100			
220 V DC			CR-U220DC3L	1SVR405622R9100			
24 V AC			CR-U024AC3L	1SVR405622R0100			
48 V AC			CR-U048AC3L	1SVR405622R5100			
110 V AC			CR-U110AC3L	1SVR405622R7100			
120 V AC			CR-U120AC3L	1SVR405622R2100			
230 V AC			CR-U230AC3L	1SVR405622R3100			



2CDC 291 007 S0011

CR-U2S

Ordering details - Accessories

Version	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Socket for 2 c/o and module	CR-U2S	1SVR405670R0000		10	
Socket for 3 c/o and module	CR-U3S	1SVR405660R0000			
Socket for 3 c/o	CR-U3E	1SVR405660R0100			
Socket small for 2 c/o	CR-U2SM	1SVR405670R1100			
Socket small for 3 c/o	CR-U3SM	1SVR405660R1100			
Holder for CR-U socket	CR-UH	1SVR405669R0000			

Bold printed products = stocked products

Pluggable interface relays

Ordering details



CR-U...

2CDC 291 004 S0011

5



CR-U T


2CDC 291 032 F0005

Ordering details - CR-U range (all products stocked)


Rated control supply voltage	Description	Version	Type	Order code	Price	Pkg qty	Weight (1 pce)
							kg (lb)
6-220 V DC	Diode - Reverse polarity protection/ free wheeling diode	A1+, A2-	CR-U 21	1SVR405661R0000		10	0.007 (0.015)
6-24 V DC	Diode and LED - Reverse polarity protection/ free wheeling diode	red, A1+, A2-	CR-U 41	1SVR405662R0000		10	0.007 (0.015)
		green, A1+, A2-	CR-U 41V	1SVR405662R1000			
24-60 V DC		red, A1+, A2-	CR-U 41B	1SVR405662R4000			
		green, A1+, A2-	CR-U 41BV	1SVR405662R4100			
110 V DC		red, A1+, A2-	CR-U 41C	1SVR405662R9000			
		green, A1+, A2-	CR-U 41CV	1SVR405662R9100			
6-24 V AC/DC	Spark quenching		CR-U 51B	1SVR405663R0000		10	0.007 (0.015)
24-60 V AC/DC			CR-U 51D	1SVR405663R4000			
110-230 V AC/DC			CR-U 51C	1SVR405663R1000			
6-24 V AC/DC	Diode and LED	red, for DC A1+, A2-	CR-U 61	1SVR405664R0000		10	0.007 (0.015)
		green, for DC A1+, A2-	CR-U 61V	1SVR405664R1000			
24-60 V AC/DC		red, for DC A1+, A2-	CR-U 61E	1SVR405664R4000			
		green, for DC A1+, A2-	CR-U 61EV	1SVR405664R4100			
110 V DC		red, for DC A1+, A2-	CR-U 91	1SVR405664R0100			
110-230 V AC		green, for DC A1+, A2-	CR-U 91V	1SVR405664R1100			
6-24 V AC/DC	Varistor and LED Overvoltage protection	red, for DC A1+, A2-	CR-U 61C	1SVR405665R0000		10	0.007 (0.015)
		green, for DC A1+, A2-	CR-U 61CV	1SVR405665R1000			
24-60 V AC/DC		red, for DC A1+, A2-	CR-U 61D	1SVR405665R4000			
		green, for DC A1+, A2-	CR-U 61DV	1SVR405665R4100			
110 V DC		red, for DC A1+, A2-	CR-U 91C	1SVR405665R0100			
110-230 V AC		green, for DC A1+, A2-	CR-U 91CV	1SVR405665R1100			
24 V AC	Overvoltage protection, varistor		CR-U 71	1SVR405666R0000		10	0.007 (0.015)
115 V AC			CR-U 71A	1SVR405666R1000			
230 V AC			CR-U 81	1SVR405666R2000			
24-240 V AC/DC	Multifunction time module	pluggable onto CR-U2S and CR-U3S	CR-U T	1SVR405667R0000		10	0.014 (0.031)

Connection diagrams


All CR-U modules can be plugged onto sockets CR-U2S and CR-U3S.




CR-U 21




CR-U 41, CR-U 41B, CR-U 41C, CR-U 41V, CR-U 41BV, CR-U 41CV




CR-U 51B, CR-U 51C, CR-U 51D,



CR-U 61, CR-U 61E, CR-U 91, CR-U 61V, CR-U 61EV, CR-U 91V



CR-U 61C, CR-U 61D, CR-U 91C, CR-U 61CV, CR-U 61DV, CR-U 91CV



CR-U 71, CR-U 81, CR-U 71A,

Pluggable interface relays

Technical data

Input circuit - coil data

CR-P range

	Rated control supply voltage U_s	Rated frequency	Make voltage (at 20 °C)	Maximum voltage (at 55 °C)	Break voltage	Rated power	Coil resistance (at 20 °C)	Tolerance of coil resistance
DC coils	12 V DC	-	8.4 V DC	30.6 V DC	$\geq 0.1 U_s$	0.4-0.48 W	360 Ω	$\pm 10\%$
	24 V DC	-	16.8 V DC	61.2 V DC	$\geq 0.1 U_s$	0.4-0.48 W	1440 Ω	$\pm 10\%$
	48 V DC	-	33.6 V DC	122.4 V DC	$\geq 0.1 U_s$	0.4-0.48 W	5700 Ω	$\pm 10\%$
	110 V DC	-	77 V DC	280 V DC	$\geq 0.1 U_s$	0.4-0.48 W	25200 Ω	$\pm 10\%$
AC coils	24 V AC	50 / 60 Hz	19.2 V AC	28.8 V AC	$\geq 0.15 U_s$	0.75 VA	400 Ω	$\pm 10\%$
	48 V AC	50 / 60 Hz	38.4 V AC	57.6 V AC	$\geq 0.15 U_s$	0.75 VA	1550 Ω	$\pm 10\%$
	110 V AC	50 / 60 Hz	88 V AC	132 V AC	$\geq 0.15 U_s$	0.75 VA	8900 Ω	$\pm 10\%$
	120 V AC	50 / 60 Hz	96 V AC	144 V AC	$\geq 0.15 U_s$	0.75 VA	10200 Ω	$\pm 10\%$
	230 V AC	50 / 60 Hz	184 V AC	276 V AC	$\geq 0.15 U_s$	0.75 VA	38500 Ω	$\pm 10\%$

CR-M range

	Rated control supply voltage U_s	Rated frequency	Make voltage (at 20 °C)	Maximum voltage (at 55 °C)	Break voltage	Rated power	Coil resistance (at 20 °C)	Tolerance of coil resistance
DC coils	12 V DC	-	9.6 V DC	13.2 V DC	$\geq 0.1 U_s$	0.9 W	160 Ω	$\pm 10\%$
	24 V DC	-	19.2 V DC	26.4 V DC	$\geq 0.1 U_s$	0.9 W	640 Ω	$\pm 10\%$
	48 V DC	-	38.4 V DC	52.8 V DC	$\geq 0.1 U_s$	0.9 W	2600 Ω	$\pm 10\%$
	60 V DC	-	48.0 V DC	66.0 V DC	$\geq 0.1 U_s$	0.9 W	4000 Ω	$\pm 10\%$
	110 V DC	-	88 V DC	121 V DC	$\geq 0.1 U_s$	0.9 W	13600 Ω	$\pm 10\%$
	125 V DC	-	100 V DC	137.5 V DC	$\geq 0.1 U_s$	0.9 W	16000 Ω	$\pm 10\%$
	220 V DC	-	176 V DC	242 V DC	$\geq 0.1 U_s$	0.9 W	54000 Ω	$\pm 10\%$
AC coils	24 V AC	50 / 60 Hz	19.2 V AC	26.4 V AC	$\geq 0.2 U_s$	1.6 VA	158 Ω	$\pm 10\%$
	48 V AC	50 / 60 Hz	38.4 V AC	52.8 V AC	$\geq 0.2 U_s$	1.6 VA	640 Ω	$\pm 10\%$
	60 V AC	50 / 60 Hz	48.0 V AC	66.0 V AC	$\geq 0.2 U_s$	1.6 VA	930 Ω	$\pm 10\%$
	110 V AC	50 / 60 Hz	88 V AC	121 V AC	$\geq 0.2 U_s$	1.6 VA	3450 Ω	$\pm 10\%$
	120 V AC	50 / 60 Hz	96 V AC	132 V AC	$\geq 0.2 U_s$	1.6 VA	3770 Ω	$\pm 10\%$
	230 V AC	50 / 60 Hz	184 V AC	253 V AC	$\geq 0.2 U_s$	1.6 VA	16100 Ω	$\pm 10\%$

CR-U range

	Rated control supply voltage U_s	Rated frequency	Make voltage (at 20 °C)	Maximum voltage (at 55 °C)	Break voltage	Rated power	Coil resistance (at 20 °C)	Tolerance of coil resistance
DC coils	12 V DC	-	9.6 V DC	13.2 V DC	$\geq 0.1 U_s$	1.5 W	110 Ω	$\pm 10\%$
	24 V DC	-	19.2 V DC	26.4 V DC	$\geq 0.1 U_s$	1.5 W	430 Ω	$\pm 10\%$
	48 V DC	-	38.4 V DC	52.8 V DC	$\geq 0.1 U_s$	1.5 W	1750 Ω	$\pm 10\%$
	110 V DC	-	88.0 V DC	121.0 V DC	$\geq 0.1 U_s$	1.5 W	9200 Ω	$\pm 10\%$
	125 V DC	-	96.0 V DC	132.0 V DC	$\geq 0.1 U_s$	1.5 W	11000 Ω	$\pm 10\%$
	220 V DC	-	176.0 V DC	242.0 V DC	$\geq 0.1 U_s$	1.5 W	37000 Ω	$\pm 10\%$
AC coils	24 V AC	50 / 60 Hz	19.2 V AC	26.4 V AC	$\geq 0.15 U_s$	2.8 VA (50 Hz) 2.5 VA (60 Hz)	75 Ω	$\pm 10\%$
	48 V AC	50 / 60 Hz	38.4 V AC	52.8 V AC	$\geq 0.15 U_s$	2.8 VA (50 Hz) 2.5 VA (60 Hz)	305 Ω	$\pm 10\%$
	60 V AC	50 / 60 Hz	48.0 V AC	66.0 V AC	$\geq 0.15 U_s$	2.8 VA (50 Hz) 2.5 VA (60 Hz)	475 Ω	$\pm 10\%$
	110 V AC	50 / 60 Hz	88.0 V AC	121.0 V AC	$\geq 0.15 U_s$	2.8 VA (50 Hz) 2.5 VA (60 Hz)	1700 Ω	$\pm 10\%$
	120 V AC	50 / 60 Hz	96.0 V AC	132.0 V AC	$\geq 0.15 U_s$	2.8 VA (50 Hz) 2.5 VA (60 Hz)	1910 Ω	$\pm 10\%$
	230 V AC	50 / 60 Hz	184.0 V AC	253.0 V AC	$\geq 0.15 U_s$	2.8 VA (50 Hz) 2.5 VA (60 Hz)	7080 Ω	$\pm 10\%$

Pluggable interface relays

Technical data

Type		CR-P...1	CR-P...2	CR-M...2	CR-M...3	CR-M...4	CR-U...2	CR-U...3
Output circuit(s)		11-12/14	11-12/14 21-22/24	11-12/14 21-22/24	11-12/14 21-22/24 31-32/34	11-12/14 21-22/24 31-32/34 41-42/44	11-12/14 31-32/34	11-12/14 21-22/24 31-32/34
Kind of output		Relay, 1 c/o	Relay, 2 c/o	Relay, 2 c/o	Relay, 3 c/o	Relay, 4 c/o	Relay, 2 c/o	Relay, 3 c/o
Contact material		AgNi	AgNi AgNi/Au 5 µm	AgNi	AgNi	AgNi AgNi/Au 5 µm	AgNi	
Rated operational voltage U _e (VDE 0110, IEC 60947-1)		250 V						
Minimum switching voltage		5 V		10 V	10 V	5 V	10 V	
Maximum switching voltage		DC 300 V DC AC 440 V AC		250 V DC 250 V AC			440 V AC	
Minimum switching current		5 mA (AgNi)	2 mA (AgNi/Au)	5 mA (AgNi)	5 mA (AgNi)	2 mA (AgNi/Au)	5 mA	
Rated free air thermal current I _{th}		16 A	8 A	12 A	10 A	6 A	10 A	
Rated operational current (IEC 60947-5-1)	AC12 (resistive) 230 V	16 A	8 A	12 A	10 A	6 A	10 A	
	AC15 (inductive) 230 V	1.5 A	1.5 A	1.5 A	1.5 A	1 A	1.5 A	
	AC15 (inductive) 120 V	3 A						
	DC12 (resistive) 24 V	16 A	8 A	12 A	10 A	6 A	10 A	
	DC13 (inductive) 24 V	2.5 A	2 A	2.5 A	2.5 A	2 A	2 A	
	DC13 (inductive) 120 V	0.22 A						
	DC13 (inductive) 250 V	0.1 A						
AC rating (UL 508)	Utilization category (pilot duty) (Contact rating code designation)	B300		B300			-	B300
	max. rated operational voltage	300 V AC		300 V AC			-	300 V AC
	Max. continuous thermal current at utilization category	5 A		5 A	5 A	2.5 A	-	5 A
	Max. making / breaking apparent power at utilization category	3600 / 360 VA		3600 / 360 VA		1800 / 180 VA	-	3600/360 VA
	Utilization category (resistive) (CSA22.2 No.14....)	16 A, 250 V AC	8 A, 250 V AC	10 A, 250 V AC 12 A, 150 V AC	6 A, 250 V AC 10 A, 150 V AC	5 A, 250 V AC 10 A, 150 V AC	10 A, 250 V AC	
	DC rating *							
	Utilization category (pilot duty) (Contact rating code designation)	R300						
(UL 508; NEMA ICS-5)	Max. rated operational voltage	300 V DC						
	Max. continuous thermal current at utilization category	1 A						
	Max. making / breaking apparent power at utilization category	28 VA						
	Utilization category (resistive) (CSA22.2 No.14....)	-	10 A, 24 V DC	-			10 A, 28 V DC	
	Maximum making (inrush) current	30 A		24 A	20 A	12 A	20 A	
	Minimum switching power	0.3 W (AgNi), 0.05 W (AgNi/Au)		0.3 W (AgNi), 0.1 W (AgNi/Au)			0.3 W	
	Maximum switching (breaking) power AC1 (resistive)	4000 VA	2000 VA	3000 VA	2500 VA	1500 VA	2500 VA	
Contact resistance		≤ 100 mΩ						
Maximum operating frequency	rated load AC-1	600 switching cycles/h		1200 switching cycles/h				
	without load	72000 switching cycles/h		18000 switching cycles/h			12000 switching cycles/h	
Mechanical lifetime		> 3 x 10 ⁷ switching cycles		> 2 x 10 ⁷ switching cycles				
Electrical lifetime	electrical AC1	> 0.7 x 10 ⁵ switching cycles	> 10 ⁵ switching cycles	> 10 ⁵ switching cycles			> 10 ⁵ switching cycles	
	(resistive)	(16 A, 250 V)	(8 A, 250 V)	(12 A, 250 V)	(10 A, 250 V)	(6 A, 250 V)	(10 A, 250 V)	
	cos φ	see reduction factor F						
Response time		typ. 7 ms		typ. 13 ms (DC), 10 ms (AC)			typ. 18 ms (DC), 12 ms (AC)	
Release time		typ. 3 ms		typ. 3 ms (DC), 8 ms (AC)			typ. 7 ms (DC), 10 ms (AC)	
Isolation data								
Rated insulation voltage		400 V AC		250 V AC				
Insulation class		C250 / B400		C250 / B250			C250	
Rated impulse withstand	between coil and contacts	5 kV AC		2.5 kV AC				
	between open contacts	1 kV AC		1.5 kV AC				
voltage U _{imp}	between c/o (SPDT) contacts	-	2.5 kV AC	2.5 kV AC		≥ 2 kV AC	2 kV AC	

* Those ratings are based on different type tests but they are not covered by the cULus or CSA approvals.

Pluggable interface relays


Technical data, Load limit curves

Type		CR-P...1	CR-P...2	CR-M...2	CR-M...3	CR-M...4	CR-U...2	CR-U...3
Clearance	between coil and contacts	≥ 10 mm		≥ 2.5 mm		≥ 1.6 mm	≥ 3 mm	
Creepage distance	between coil and contacts	≥ 10 mm		≥ 4 mm		≥ 3.2 mm	≥ 4.2 mm	
Overvoltage category		III		III		II	III	
Pollution degree		3		3		2	3	
General data								
Dimensions (W x H x D) when mounted		12.7 x 29 x 15.7 mm		21.2 x 27.5 x 35.6 mm		35 x 35 x 54.4 mm		
Weight		14 g (0.031 lb)		35 g (0.077 lb)		83 g (0.18 lb)		
Mounting		on socket (see accessories)						
Mounting position		any						
Degree of protection		IP 67		IP 40				
Electrical connection								
Connection		by socket						
Environmental data								
Ambient temperature range	operation	DC: -40...+85 °; AC: -40...+70 °C		DC: -40...+70 °; AC: -40...+55 °C				
	storage	-40 ... +85 °C						
Vibration resistance 10-150 Hz	n/o contact	10 g		5 g		5 g		
	n/c contact	10 g	5 g	5 g		5 g		
Shock resistance	n/o contact	30 g	20 g	10 g		10 g		
	n/c contact	30 g	20 g	5 g		10 g		
Standards								
Product standard		EN 61810-1, EN 60255-23 IEC 60664-1		EN 60810-1, EN 60255-23, IEC 61810-7		EN 60255-1-00		
Low Voltage Directive		2006/95/EC						


Approvals see page 5/6.

Load limit curves - Maximum switching power at resistive DC load


CR-P with 1 c/o contact

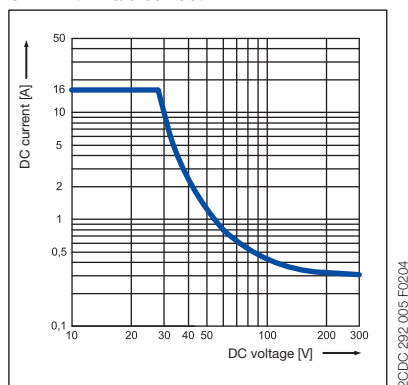


CR-P with 2 c/o contacts

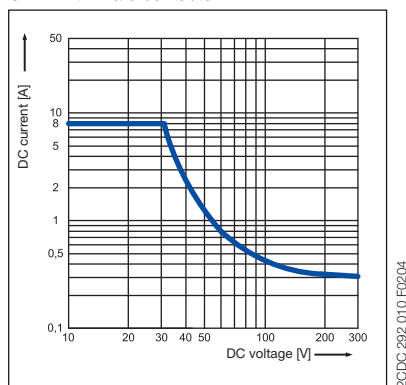


CR-U with 2 and 3 c/o contacts

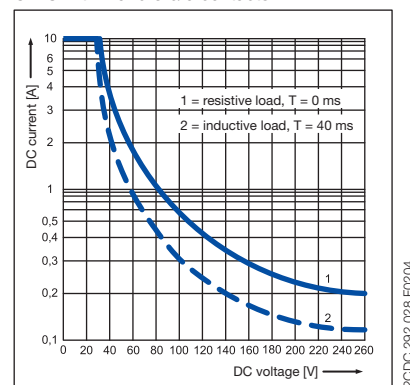


CR-M with 2 c/o contacts

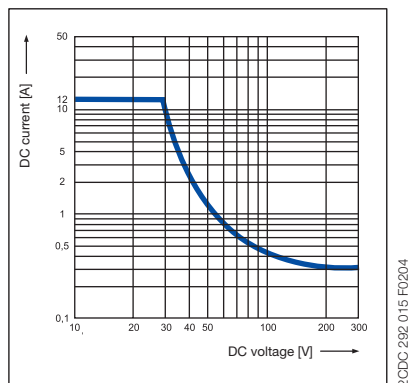

CR-M with 3 c/o contacts

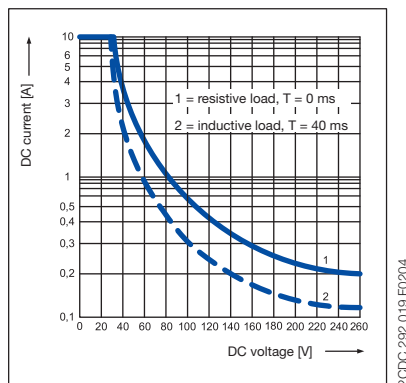

CR-M with 4 c/o contacts

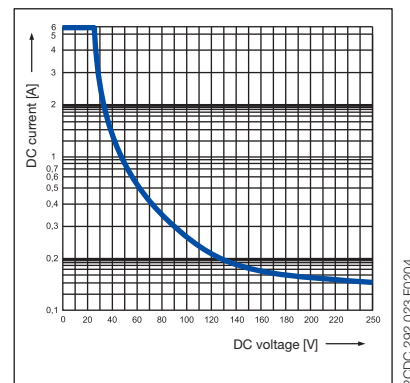


Pluggable interface relays


Load limit curves

Load limit curves - Electrical lifetime at resistive AC load


CR-P with 1 c/o contact

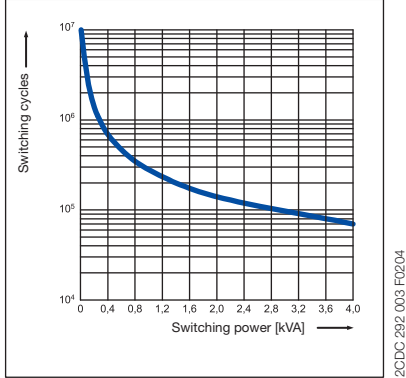


CR-P with 2 c/o contacts

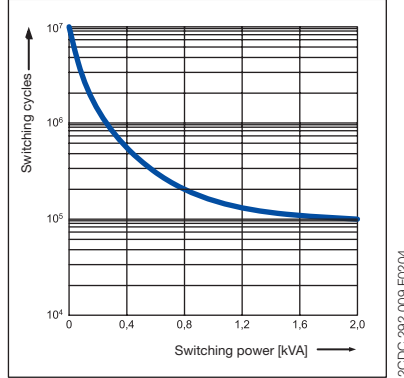


CR-U with 2 and 3 c/o contacts

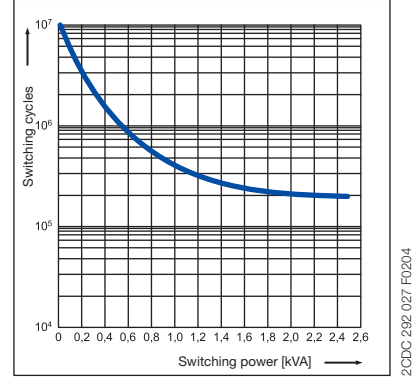


CR-M with 2 c/o contacts

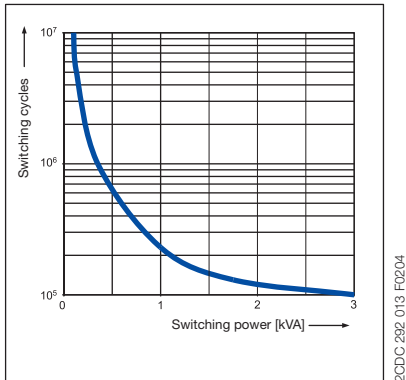

CR-M with 3 c/o contacts

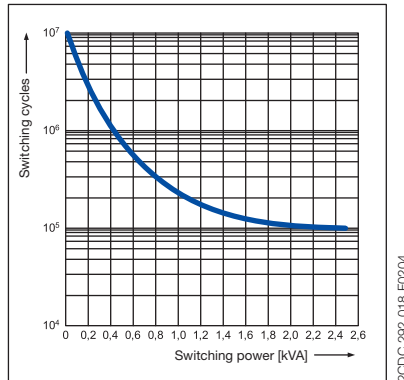


CR-M with 4 c/o contacts

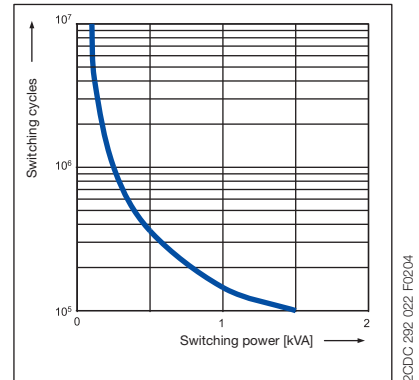


Reduction factor F at inductive AC load


CR-P

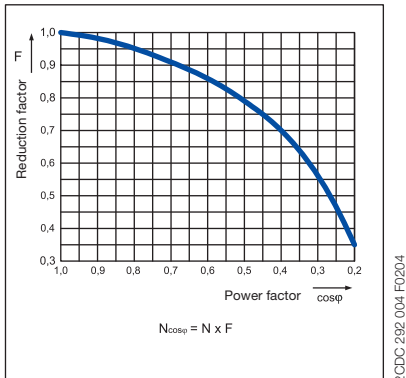

CR-M

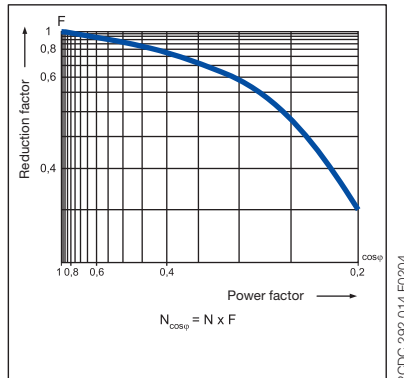


CR-U

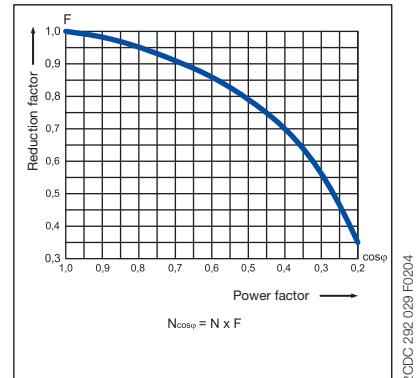


Pluggable interface relays

Connection diagrams


Connection diagrams




CR-P with 1 c/o contact




CR-P with 2 c/o contacts




CR-M with 2 c/o contacts




CR-M with 3 c/o contacts



CR-U with 2 c/o contacts







CR-M with 4 c/o contacts





CR-U with 3 c/o contacts

Dimensional drawings

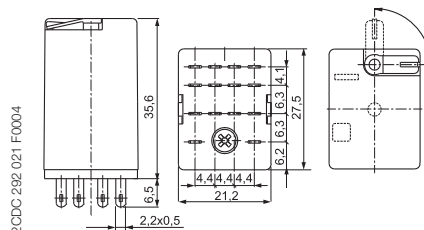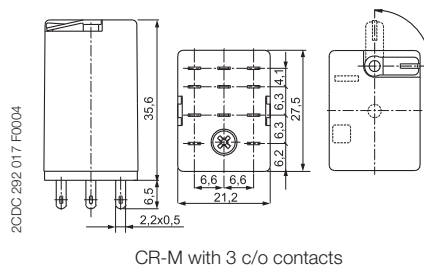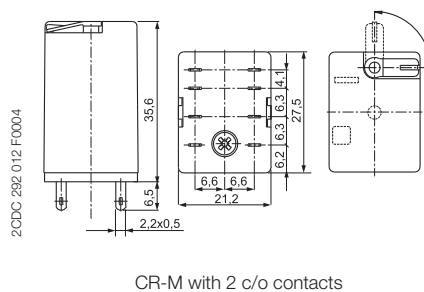

Dimensions in mm and inches

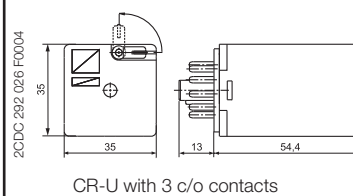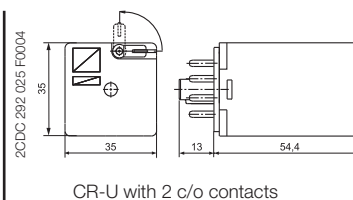


Pluggable interface relays


Connection diagrams

Dimensional drawings


Sockets for screw connection

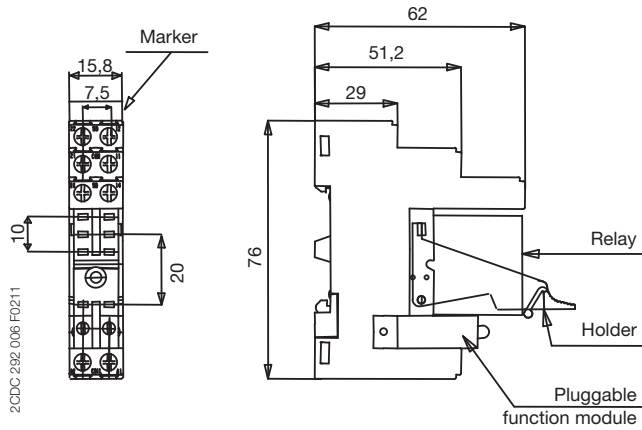

CR-PLS

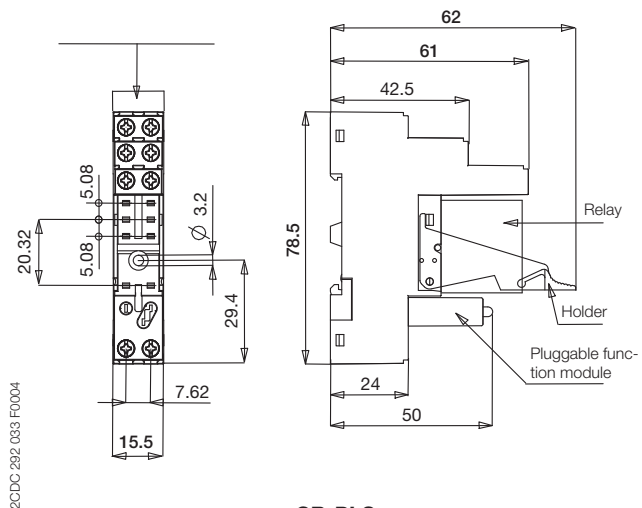


CR-PLSx

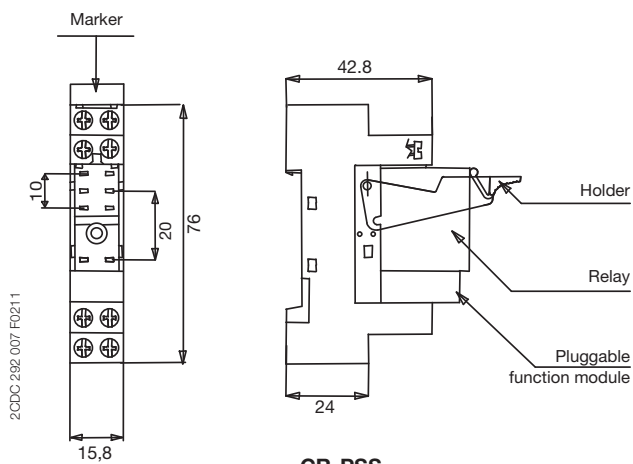


CR-PSS


Dimensions in mm and inches

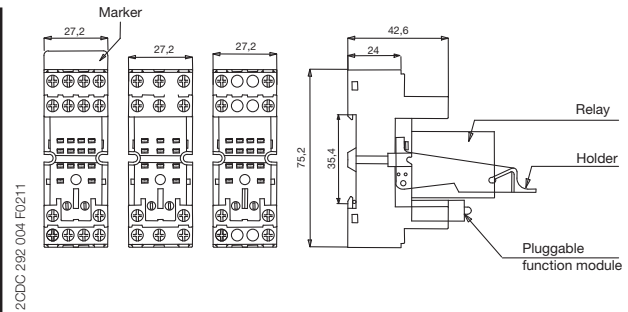




CR-M2SS - CR-M3SS - CR-M4SS

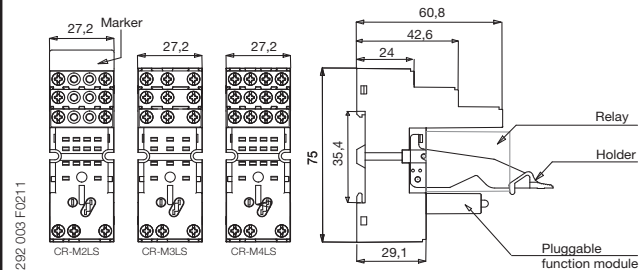

CR-M2LS - CR-M3LS - CR-M4LS

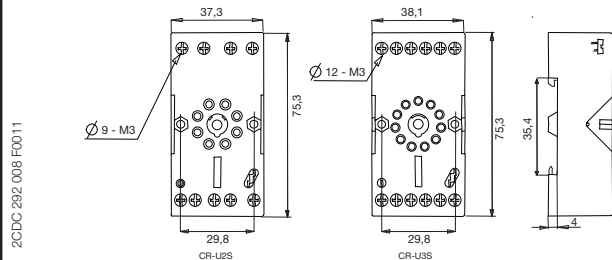

CR-U2S - CR-U3S

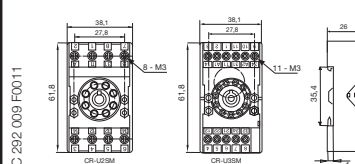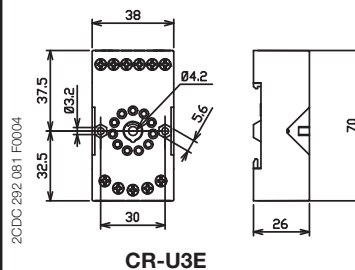


Pluggable interface relays

Connection diagrams


Dimensional drawings

Dimensions in mm and inches

Sockets for spring connection

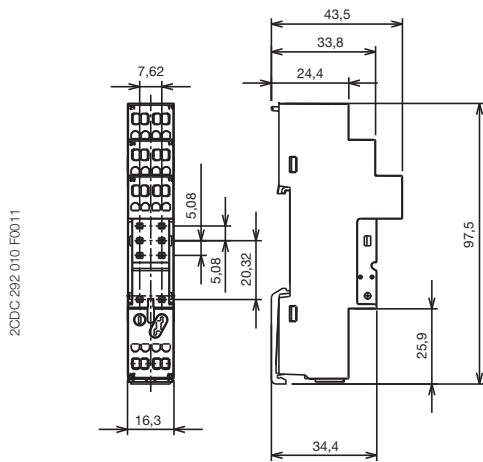


CR-PLC




CR-M2LC , CR-M4LC

Jumper

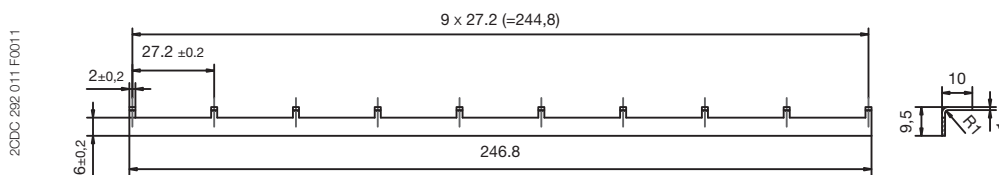

CR-PJ

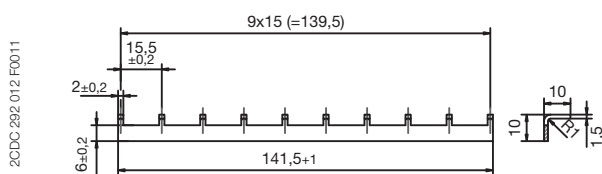

CR-MJ