
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

© 2003, Projects Unlimited Inc.

**SPECIFICATIONS** 

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	5	Vdc
OPERATING VOLTAGE RANGE	4 ~ 8	Vdc
RATED CURRENT (MAX)	30	mA
MINIMUM SPL @ 10 cm.	85	dBA
RESONANT FREQUENCY	2,200±300	Hz
TONE OR PULSE RATE	CONTINUOUS	0 PULSE PER SECOND
OPERATING TEMPERATURE	-20 ~ +70	°C
STORAGE TEMPERATURE	-30 ~ +80	°C
HOUSING MATERIAL	NORYL	_
TERMINAL MATERIAL	TIN-PLATED COPPER	_
WEIGHT	7	grams

REVISIONS				
LTR	DESCRIPTION	DATE	APPROVED	
_	RELEASED FROM ENGINEERING	6/23/99		
Α	ADDED ELECTRICAL SPECIFICATION	6/7/02	S.	
В	REVISED TO NEW TEMPLATE	4/15/04	R.W.	
С	REVISED DIMENSION SIZE AND STYLE	11/18/05	R.W.	

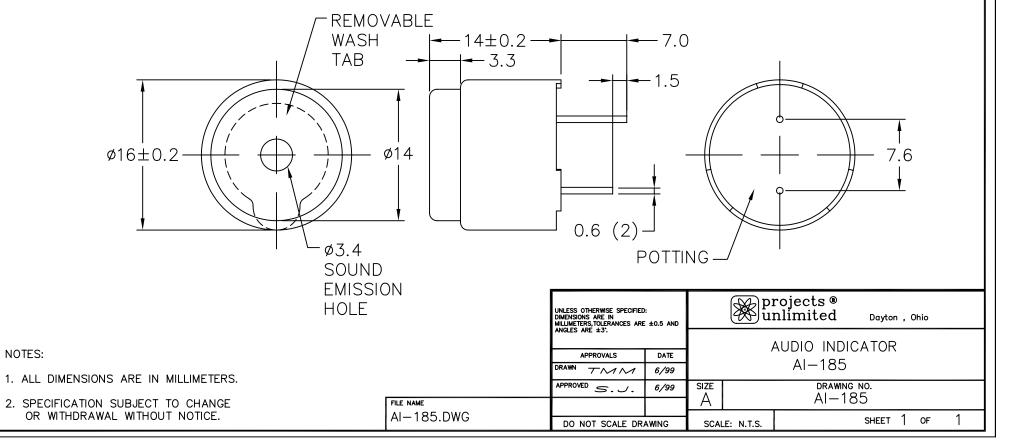

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio: