

DATA SHEET



NPN SILICON RF TRANSISTOR NE856M02 / 2SC5336 JEITA Part No.

NPN SILICON RF TRANSISTOR FOR HIGH-FREQUENCY LOW DISTORTION AMPLIFIER 4-PIN POWER MINIMOLD

FEATURES

- High gain: $|S_{21e}|^2 = 12$ dB TYP. @ $V_{CE} = 10$ V, $I_c = 20$ mA, $f = 1$ GHz
- 4-pin power minimold package with improved gain from the NE85634 / 2SC3357

★ ORDERING INFORMATION

Part Number	Quantity	Supplying Form
NE856M02-AZ 2SC5336-AZ	25 pcs (Non reel)	• Magazine case
NE856M02-AZ 2SC5336-T1-AZ	1 kpcs/reel	• 12 mm wide embossed taping • Collector face the perforation side of the tape

Remark To order evaluation samples, please contact your nearby sales office.
Unit sample quantity is 25 pcs.

ABSOLUTE MAXIMUM RATINGS ($T_A = +25^\circ\text{C}$)

Parameter	Symbol	Ratings	Unit
Collector to Base Voltage	V_{CBO}	20	V
Collector to Emitter Voltage	V_{CEO}	12	V
Emitter to Base Voltage	V_{EBO}	3.0	V
Collector Current	I_c	100	mA
Total Power Dissipation	P_{tot} <small>Note</small>	1.2	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-65 to +150	$^\circ\text{C}$

Note Mounted on $16\text{ cm}^2 \times 0.7\text{ mm}$ (t) ceramic substrate (Copper plating)

Because this product uses high-frequency technology, avoid excessive static electricity, etc.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

ELECTRICAL CHARACTERISTICS (T_A = +25°C)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
DC Characteristics						
Collector Cut-off Current	I _{CBO}	V _{CB} = 10 V, I _E = 0 mA	–	–	1.0	μA
Emitter Cut-off Current	I _{EBO}	V _{BE} = 1 V, I _C = 0 mA	–	–	1.0	μA
DC Current Gain	h _{FE} ^{Note 1}	V _{CE} = 10 V, I _C = 20 mA	50	120	250	–
RF Characteristics						
Gain Bandwidth Product	f _T	V _{CE} = 10 V, I _C = 20 mA	–	6.5	–	GHz
Insertion Power Gain	S _{21e} ²	V _{CE} = 10 V, I _C = 20 mA, f = 1 GHz	–	12	–	dB
Noise Figure (1)	NF	V _{CE} = 10 V, I _C = 7 mA, f = 1 GHz	–	1.1	–	dB
Noise Figure (2)	NF	V _{CE} = 10 V, I _C = 40 mA, f = 1 GHz	–	1.8	3.0	dB
Reverse Transfer Capacitance	C _{re} ^{Note 2}	V _{CB} = 10 V, I _E = 0 mA, f = 1 MHz	–	0.5	0.8	pF


- Notes 1.** Pulse measurement: PW ≤ 350 μs, Duty Cycle ≤ 2%
2. Collector to base capacitance when the emitter grounded

h_{FE} CLASSIFICATION


Rank	RH	RF	RE
Marking	RH	RF	RE
h _{FE} Value	50 to 100	80 to 160	125 to 250

★ TYPICAL CHARACTERISTICS (Unless otherwise specified, $T_A = +25^\circ\text{C}$)


TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE

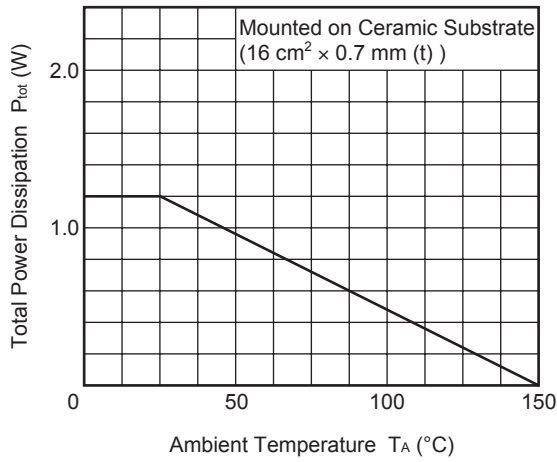


REVERSE TRANSFER CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE

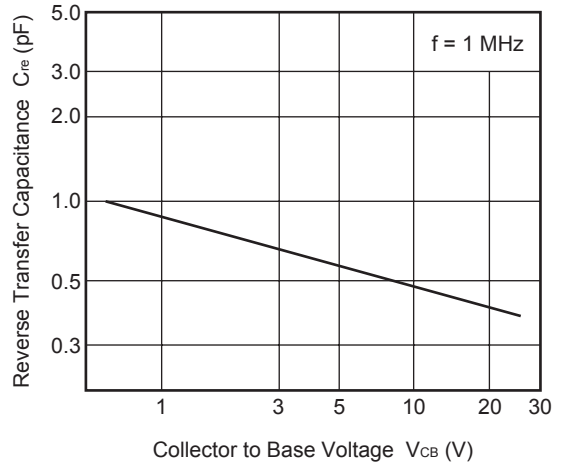


DC CURRENT GAIN vs. COLLECTOR CURRENT

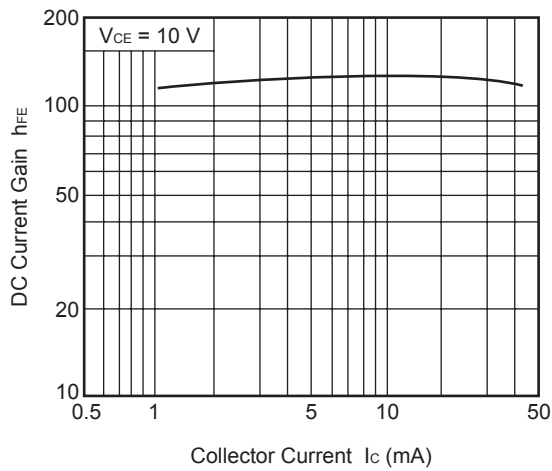


GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

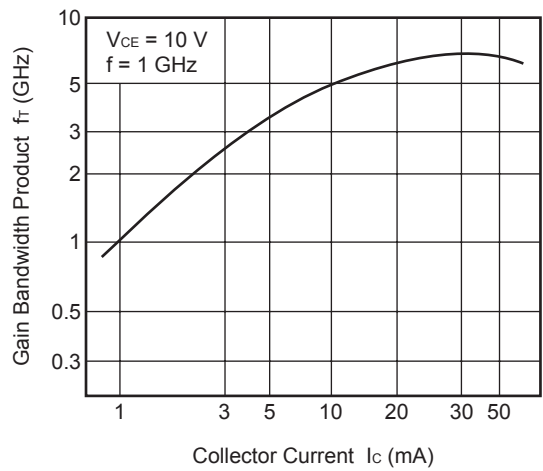


INSERTION POWER GAIN, MAG vs. FREQUENCY

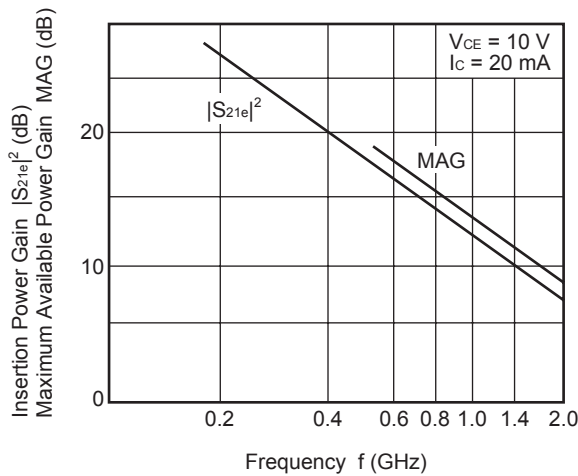


INSERTION POWER GAIN vs. COLLECTOR CURRENT

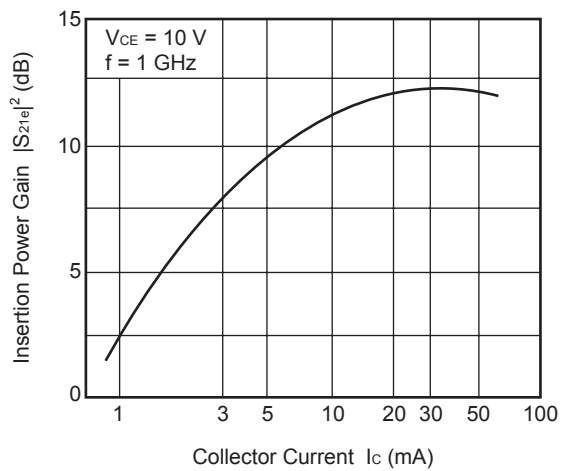

NOISE FIGURE vs. COLLECTOR CURRENT

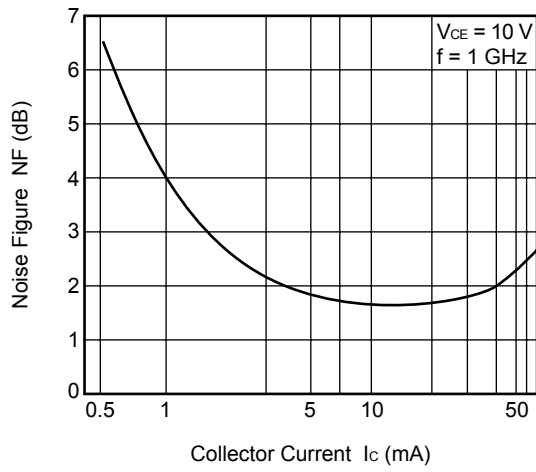

IM₃, IM₂ vs. COLLECTOR CURRENT

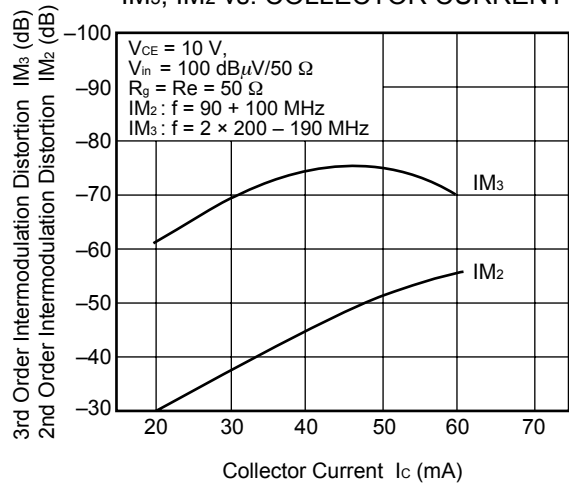

Remark The graphs indicate nominal characteristics.

S-PARAMETERS

V_{CE} = 10 V, I_C = 20 mA


Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)
0.1	0.519	-74.5	30.931	131.9	0.017	60.6	0.752	-30.2
0.2	0.413	-112.9	18.965	111.5	0.031	61.9	0.570	-39.7
0.3	0.413	-133.4	13.324	101.9	0.038	65.1	0.465	-39.8
0.4	0.345	-145.7	10.164	95.9	0.045	69.8	0.428	-40.1
0.5	0.331	-153.8	8.177	91.8	0.055	71.8	0.436	-41.1
0.6	0.320	-159.6	6.834	89.1	0.064	70.9	0.438	-43.5
0.7	0.302	-166.8	5.832	86.7	0.074	73.9	0.434	-47.5
0.8	0.296	-169.2	5.107	84.3	0.077	74.4	0.429	-47.8
0.9	0.283	-173.2	4.600	83.1	0.088	71.2	0.436	-46.5
1.0	0.285	-179.8	4.200	82.3	0.097	74.5	0.455	-47.8
1.1	0.265	175.2	3.930	80.8	0.100	76.3	0.467	-46.8
1.2	0.260	174.1	3.979	78.5	0.109	75.9	0.529	-47.4
1.3	0.263	166.0	3.741	68.6	0.114	76.8	0.551	-55.8
1.4	0.242	163.0	3.115	66.6	0.119	78.3	0.509	-55.8
1.5	0.252	160.1	2.844	65.7	0.133	82.0	0.510	-58.5
1.6	0.253	154.0	2.595	64.1	0.140	81.0	0.496	-55.2
1.7	0.253	149.9	2.420	63.7	0.158	80.9	0.515	-54.8
1.8	0.257	147.2	2.305	63.0	0.165	82.2	0.518	-56.5
1.9	0.262	143.0	2.171	62.6	0.172	80.5	0.536	-58.6
2.0	0.273	141.5	2.049	61.2	0.177	78.3	0.524	-61.5

V_{CE} = 10 V, I_C = 40 mA

Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)
0.1	0.378	-97.1	32.908	123.3	0.017	71.1	0.665	-34.7
0.2	0.317	-131.8	18.819	106.0	0.027	71.2	0.487	-38.7
0.3	0.308	-150.1	12.955	97.5	0.035	71.8	0.398	-38.5
0.4	0.299	-158.7	9.775	93.1	0.042	78.1	0.393	-36.9
0.5	0.297	-165.5	7.899	89.8	0.052	78.5	0.399	-37.6
0.6	0.288	-169.2	6.586	87.6	0.061	79.1	0.407	-39.9
0.7	0.274	-173.7	5.607	85.2	0.071	77.4	0.400	-44.6
0.8	0.261	-177.3	4.879	83.5	0.081	76.4	0.415	-47.4
0.9	0.255	178.9	4.435	82.2	0.092	76.5	0.399	-46.2
1.0	0.260	173.0	4.024	81.4	0.095	77.6	0.440	-44.3
1.1	0.243	169.4	3.801	80.6	0.098	77.1	0.441	-45.2
1.2	0.239	169.3	3.827	78.2	0.109	78.3	0.494	-46.2
1.3	0.245	160.3	3.587	68.4	0.117	78.0	0.517	-55.4
1.4	0.216	157.8	2.980	66.0	0.125	80.3	0.486	-54.5
1.5	0.235	155.3	2.726	66.1	0.137	86.5	0.500	-59.0
1.6	0.243	148.8	2.537	64.0	0.143	80.6	0.474	-53.7
1.7	0.233	146.0	2.348	64.2	0.159	81.2	0.496	-56.8
1.8	0.242	144.6	2.200	63.5	0.163	80.4	0.491	-53.6
1.9	0.249	141.9	2.073	63.3	0.171	81.7	0.534	-58.0
2.0	0.260	140.4	1.986	61.7	0.184	77.5	0.535	-61.3

★ PACKAGE DIMENSIONS

4-PIN POWER MINIMOLD (UNIT: mm)

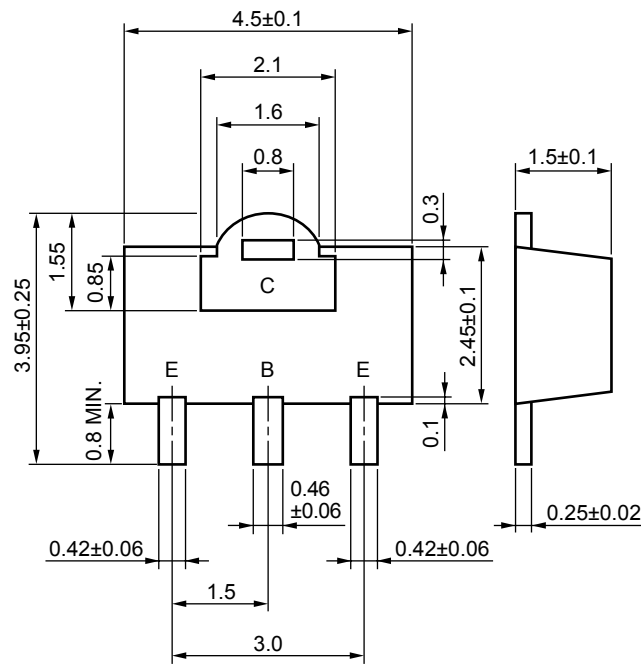

PIN CONNECTIONS

- E: Emitter
- C: Collector
- B: Base

NOTICE

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. California Eastern Laboratories and Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
2. California Eastern Laboratories has used reasonable care in preparing the information included in this document, but California Eastern Laboratories does not warrant that such information is error free. California Eastern Laboratories and Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
3. California Eastern Laboratories and Renesas Electronics do not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of California Eastern Laboratories or Renesas Electronics or others.
4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. California Eastern Laboratories and Renesas Electronics assume no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc. "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc. Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. California Eastern Laboratories and Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by California Eastern Laboratories or Renesas Electronics.
6. You should use the Renesas Electronics products described in this document within the range specified by California Eastern Laboratories, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. California Eastern Laboratories shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
8. Please contact a California Eastern Laboratories sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. California Eastern Laboratories and Renesas Electronics assume no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
10. It is the responsibility of the buyer or distributor of California Eastern Laboratories, who distributes, disposes of, or otherwise places the Renesas Electronics product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, California Eastern Laboratories and Renesas Electronics assume no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of California Eastern Laboratories.
12. Please contact a California Eastern Laboratories sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

NOTE 1: "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

NOTE 2: "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

NOTE 3: Products and product information are subject to change without notice.

CEL Headquarters • 4590 Patrick Henry Drive, Santa Clara, CA 95054 • Phone (408) 919-2500 • www.cel.com

For a complete list of sales offices, representatives and distributors,
Please visit our website: www.cel.com/contactus