



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0,05)

NOTES:
MATERIAL
1. Insulator Material: PBT +30%GF(UL94V-0), Grey
2. Contact Material : Brass
3. Contact Plating : Gold flash/Tin Over Ni
④ AWHW xxA-0102-T: 30u" Au/Tin Over Ni
AWHW xxA-0202-T: Gold flash/Tin Over Ni

ELECTRICAL
1. Current Rating : 3AMP
2. Withstand Voltage : 500V AC/Minute
3. Contact Resistance : 20mΩ max
4. Insulation Resistance: 1000MΩ min
ENVIRONMENTAL
1. Operation Temperature: -40°C to +105°C
2. Packing : Tray packing

Order information:
xx : 06,08,10,12,14,16,18,20,24
26,30,34,40,50,60,64

Dimension antitheses list	
NO. Pin	L
6P-8P	4,00
10P-64P	4,40

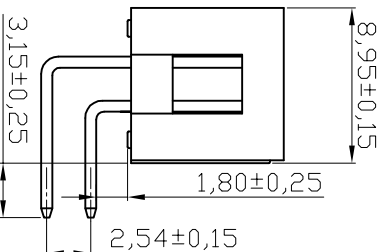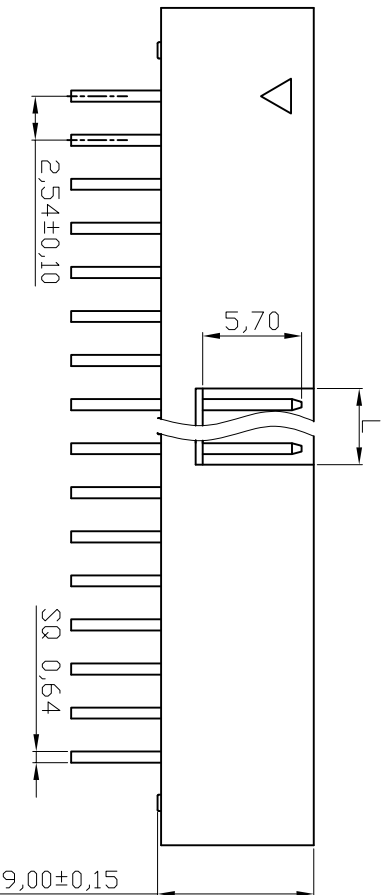

RoHS compliant
Unit: mm



Scale	Free								
TOLERANCE									
X.X	±0,40								
X.XX	±0,25	④	Add 30u" Au version	12.12.2013	Winnie	Drawn	25.01.2006	Alex	
X.XXX	±0,15	③	Add UL file no.	12.12.2013	Amy	Approved	12.12.2013	Winnie	
DIM	TOL	②	Update	29.06.2009	Dean				
Angle	±3°	①	Drawn	25.01.2006	Alex				
			Id.			Modification			

ASSMANN
WSW components

Customer-No.	Name	Date	Name
	Alex	25.01.2006	Alex
ASSMANN WSW-No.	Winnie		Winnie
AWHW xxA-0202-T			
④ AWHW xxA-0102-T			
Drawing-No.			
ASS 2315 CO			
Replace			
rev04			
Sheet			

1	2	3	4	5	6	7	SV/xxx
H	G	F	E	D	C	B	A