


## IB ST 24 BAO 8/U

Order No.: 2721044

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2721044>

INTERBUS-ST analog output module, D/A resolution 13-bit, 8 outputs, -10 V to +10 V, - 12 to + 12 V, consisting of: Terminal part with screw connection and module electronics

### Commercial data

GTIN (EAN)	
sales group	K402
Pack	1 pcs.
Customs tariff	85389091
Catalog page information	Page 239 (AX-2011)

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Product description

INTERBUS ST standard analog output modules

These 8-channel output modules are an inexpensive alternative in applications with many analog actuators.

In addition to the standard output voltage of -10 to +10 V, the IB ST 24 BAO 8/U offers an extended output range of -12 to +12 V.

If the high 12-bit resolution of the output value is not necessary, the IB ST 24 BAO 8/U-8B gives you the option of saving PLC memory by combining two channels of 8 bits each into one data word. Further features are:

- Diagnostic LEDs provide information on the operating status at any time.
- All modules can be individually labeled on the large pull-out labeling field. The insert cards can be prepared by hand, or by plotter or printer.

- In the event of failure or malfunction, the electronics of the module can be easily replaced. The passive termination block remains mounted on the rail. This means that the replacement process can be carried out in a just a few seconds and without the need for tools.

- The fuses are accessible from outside, so that a fault can be cleared quickly.

- The connection to protective earth ground is made directly via the DIN rail.

- The conventional labeling materials (Zack strip ZB-6, etc.) can be used to label the termination blocks.

## Technical data

### Interfaces

Interface	ST local bus
Connection method	ST local bus connector

### Power supply

Communications power $U_L$	9 V DC (from the ST local bus)
Typical current consumption	150 mA (at $U_S$ )
I/O voltage	$\pm 24$ V DC 5 % (ripple)
Peripherals voltage range	18.5 V DC ... 30.2 V DC
Max. power consumption from the local bus	120 mA (from the ST local bus) 100 mA (from the ST local bus)

### Electrical isolation

Test section	Bus/Outputs 500 V AC 50 Hz 1 min
	Supply voltage/Outputs 500 V AC 50 Hz 1 min
	Supply voltage/Ground conductor 500 V AC 50 Hz 1 min
	I/O voltage/Ground conductor 500 V AC 50 Hz 1 min

### Outputs

No. of channels	8
Connection method	2-wire Screw connection
Voltage output signal	-10 V ... 10 V (max. 2 mA/-12 V to +12 V (max. 1.2 mA)) -12 V ... 12 V 0 V ... 10 V
Load/output load voltage output	> 5 k $\Omega$ (> 10 k $\Omega$ )
Voltage output quantization	2.44 mV (2.93 mV)
Basic error limit	0.19 %
Representation of output values	16 bit complement on two

Transmission of output values from the control system	Multiplexed, 4 channels each
DAC resolution	13 Bit
Process data update	3 ms (incl. slew rate)

#### General data

Weight	600 g
Width	118 mm
Height	117 mm
Length	116 mm

#### Certificates / Approvals




Certification GOST

#### Accessories


Item	Designation	Description
<b>Bridges</b>		
2836269	EB 84 IB ST BU	Insertion bridges, divisible, isolated comb spine, color blue, 84-pos.
2836272	EB 84 IB ST RD	Insertion bridges, divisible, isolated comb spine, color red, 84-pos.
<b>Cable/conductor</b>		
2836492	IB ST LBC	Spare local bus cable, for INTERBUS-ST modules
<b>Fuse</b>		
2753478	IBS TR5 0,4AT	Replacement fuse, for INTERBUS-ST modules

Diagrams/Drawings

Connection diagram

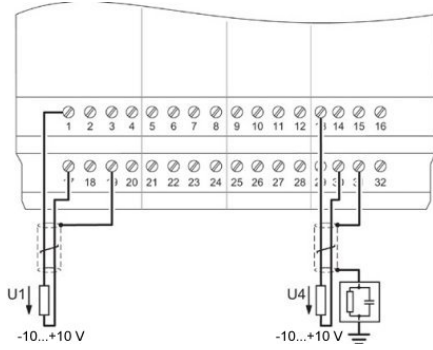

Dimensioned drawing

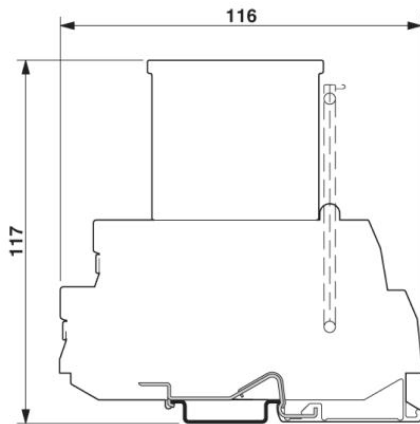

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;