

32.768kHz CERAMIC SMD CRYSTAL OSCILLATOR

ASHK SERIES



RoHS
Compliant



FEATURES:

- Ultra low μA current consumption with CMOS output
- Miniature ceramic package (4.0 x 2.5 x 0.9mm)
- Operating Temp -40°C to $+85^{\circ}\text{C}$
- Start up time less than 1 sec with supply voltage 1.5 to 5.5V
- Tri-state function
- Pb-free reflow capable

APPLICATIONS:

- General purpose clock generator for digital systems
- Clock drivers for Real Time Clocks
- Timekeeping in network servers and computers
- Electricity, gas and water metering
- Portable field communication
- Mobile phone
- Clock & Data recovery
- CCD clock for VTR camera
- Computers and peripherals
- Portable MP3 players & games

STANDARD SPECIFICATIONS:

PARAMETERS	
ABRACON P/N	ASHK Series
Frequency range:	32.768kHz
Operating temperature:	-20°C to $+70^{\circ}\text{C}$ (see options)
Storage temperature:	-55°C to $+125^{\circ}\text{C}$
Frequency tolerance:	$\pm 5 \pm 20\text{ppm}$ @ $+25^{\circ}\text{C}$ Vdd=3.3V; referenced to 32.768kHz
Overall frequency stability:	-120 to $+10$ ppm over -20 to $+70^{\circ}\text{C}$; referenced to frequency measured @ 25°C
Supply voltage (Vdd):	3.3 V $\pm 5\%$ (see options. 1.5 to 5.5V)
Supply current:	Please see Table 1
Symmetry:	40/60 % @ 1/2Vdd
Rise and fall time (Tr/Tf):	200ns max. (10% to 90%Vdd, CL=15pF)
Startup time:	1 sec max. for Vdd=3.3V @ $+25^{\circ}\text{C}$
Output load:	CMOS (15 pF max.)
Output voltage (CL=15pF @ $+25^{\circ}\text{C}$):	VOH = Vdd-0.4V min. VOL = 0.4V max.
Tri-state function:	"1" (VIH ≥ 0.9 *Vdd) (Pin must be set "1" to oscillate) "0" (VIL < 0.1 *Vdd) : Hi Z
Stand-by current:	250nA max. @ $+25^{\circ}\text{C}$
Aging (first year) $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$:	$\pm 5\text{ppm}$ max.
Aging (10 years) $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$:	$\pm 10\text{ppm}$ max.

TABLE 1

Vdd (V)	Supply Current ($\mu\text{A typ.}$)	Supply Current ($\mu\text{A max.}$)
3.3 (STD)	1.4	1.5
5.5	2.2	2.4
2.8	1.2	1.4
1.5	1.0	1.2
1.5	0.8	1.0


OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

ASHK□ - 32.768kHz - □ - □		
Supply Voltage	Frequency Temp Characteristics	Packaging
Blank 3.3V	Blank -20°C to $+70^{\circ}\text{C}$ / -90 to $+10$ ppm	Blank Bulk
2 5.5V	L -40°C to $+85^{\circ}\text{C}$ / -140 to $+10$ ppm	Tape and Reel
3 2.8V		
4 1.8V		
5 1.5V		

Please contact ABRACON for more information.

TYPICAL TEMP CHARACTERISTICS

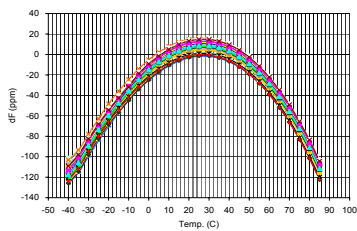


ABRACON IS
ISO 9001 / QS 9000
CERTIFIED




Visit www.abracon.com for Terms & Conditions of Sale Revised: 11.24.09
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

32.768kHz CERAMIC SMD CRYSTAL OSCILLATOR


ASHK SERIES




OUTLINE DRAWING:

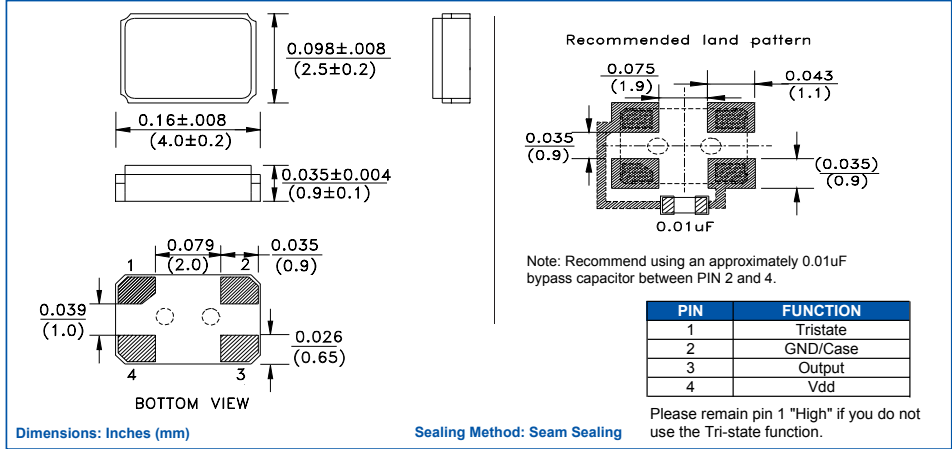


TAPE & REEL: Tape and reel 1,000pcs/reel

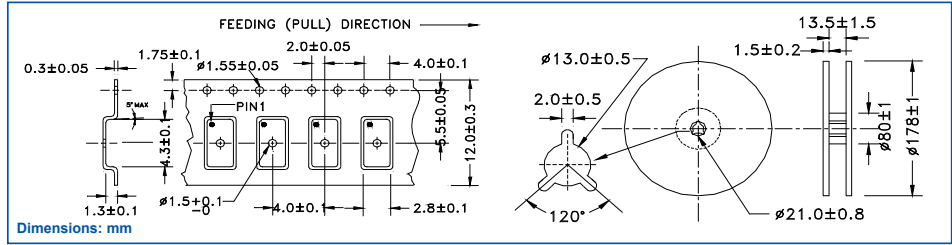

REFLOW PROFILE

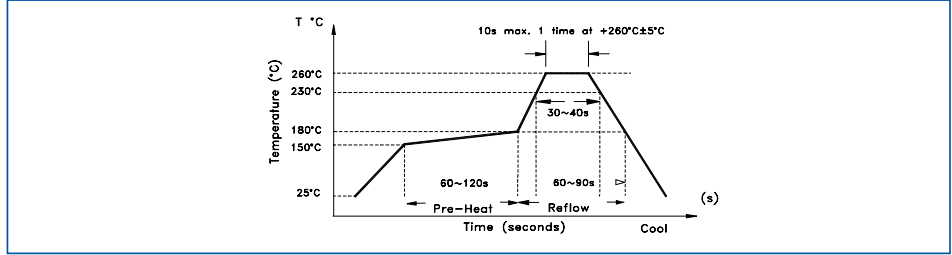

NOTE: Abracon manufactured products are intended for general commercial and industrial use. For applications requiring high reliability and/or presenting extreme operating environment, written consent & authorization from Abracon is required.



Visit www.abracon.com for Terms & Conditions of Sale Revised: 11.24.09
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com