


Contact Loading Codes

0 (or blank) — Contacts included

1 — Contacts not included; must be ordered separately by AMP Part Number.

Note: When connectors are ordered with contacts, the contact style section (AA in the example code at the top of this page) must be specified so that the proper, unloaded inserts are included. COAXICON contacts are not supplied in connector kits and must be ordered separately.

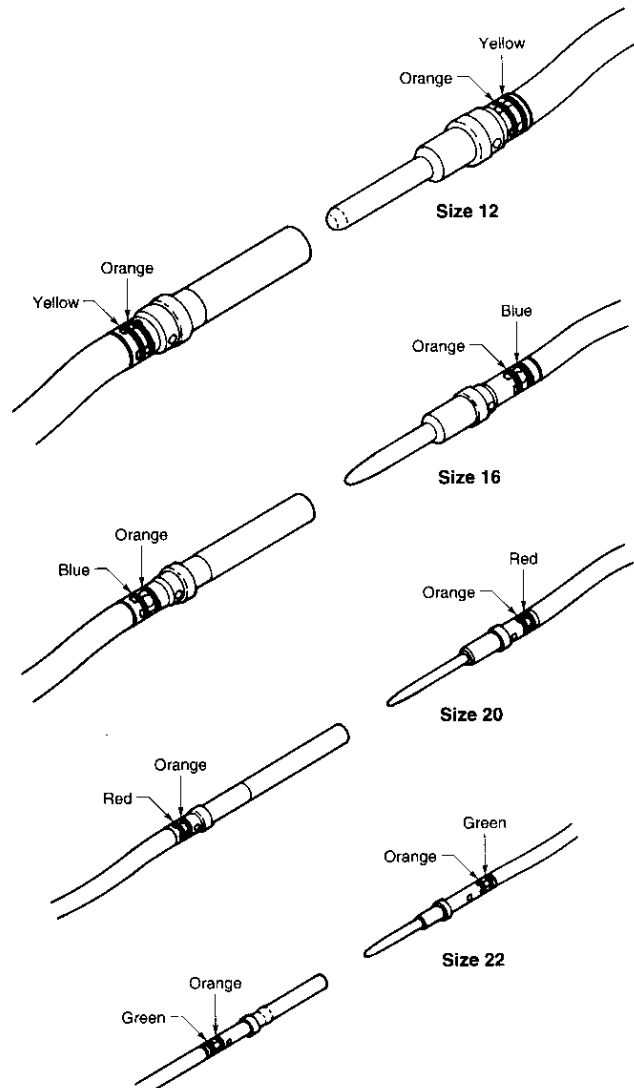

Insertion and Extraction



Typical Tool

Crimp, Snap-In, Rear-Release Contacts (also suitable for ARINC 404)

| Average Contact Size | Wire Size | | Color Code | Average Engagement Force | Part Numbers | | Tooling Part Numbers | | | Color Code |
|----------------------|-----------|-----------------|------------|--------------------------|--------------|----------------|----------------------|-------------|---------------------------|------------|
| | AWG | mm ² | | | Pin Contact | Socket Contact | Crimp Tool | Positioner | Insertion/Extraction Tool | |
| 22 | 26-22 | 0.12-0.4 | Green | 1.5 oz. [.42 N] | 208262-3 | 208264-2 | M22520/2-01 | M22520/2-23 | 91066-1 | Green |
| 20 | 24-20 | 0.2-0.6 | Red | 2.0 oz. [.56 N] | 208265-3 | 208267-2 | M22520/2-01 | M22520/2-08 | 91066-4 | Red |
| 16 | 20-16 | 0.5-1.4 | Blue | 3.0 oz. [.83 N] | 208268-3 | 208270-2 | M22520/1-01 | M22520/1-02 | 91066-3 | Blue |
| 12 | 14-12 | 2-3 | Yellow | 12.0 oz. [3.34 N] | 208271-3 | 208273-2 | M22520/1-01 | M22520/1-11 | 445147-1 | — |