

CMSZDA2V4 THRU CMSZDA47V

**SURFACE MOUNT
DUAL, COMMON ANODE
SILICON ZENER DIODES
275mW, 2.4 THRU 47 VOLTS**

SUPERmini™**SOT-323 CASE**www.centra-semi.com**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMSZDA2V4 Series silicon dual zener diode is a highly quality voltage regulator, connected in a common anode configuration, for use in industrial, commercial, entertainment and computer applications.

MARKING CODE: SEE MARKING CODES ON ELECTRICAL CHARACTERISTICS TABLE**MAXIMUM RATINGS:** ($T_A=25^{\circ}\text{C}$)

Power Dissipation

Operating and Storage Junction Temperature

Thermal Resistance

SYMBOL P_D T_J, T_{stg} Θ_{JA}

275

-65 to +150

455

UNITS

mW

 $^{\circ}\text{C}$ $^{\circ}\text{C/W}$ **ELECTRICAL CHARACTERISTICS PER DIODE:** ($T_A=25^{\circ}\text{C}$) $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$ (for all types)

TYPE	ZENER VOLTAGE $V_Z @ I_{ZT}$			TEST CURRENT	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAXIMUM ZENER CURRENT	MAXIMUM ZENER VOLTAGE TEMP. COEFF.	MARKING CODE
	MIN	NOM	MAX	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$		I_{ZM}	ΘV_Z	
	V	V	V	mA	Ω	Ω	mA	μA	V	mA	% / $^{\circ}\text{C}$	
CMSZDA2V4	2.2	2.4	2.6	5.0	100	600	1.0	50	1.0	63	-0.06	W3W
CMSZDA2V7	2.5	2.7	2.9	5.0	100	600	1.0	20	1.0	57	-0.06	W4W
CMSZDA3V0	2.8	3.0	3.2	5.0	95	600	1.0	10	1.0	54	-0.06	W5W
CMSZDA3V3	3.1	3.3	3.5	5.0	95	600	1.0	5.0	1.0	47	-0.06	W6W
CMSZDA3V6	3.4	3.6	3.8	5.0	95	600	1.0	2.0	1.0	45	-0.06	W7W
CMSZDA3V9	3.7	3.9	4.1	5.0	90	600	1.0	2.0	1.0	43	-0.06	W8W
CMSZDA4V3	4.0	4.3	4.6	5.0	90	600	1.0	1.0	1.0	40	-0.05	W9W
CMSZDA4V7	4.4	4.7	5.0	5.0	80	500	1.0	3.0	2.0	38	-0.03	Z1Z
CMSZDA5V1	4.8	5.1	5.4	5.0	60	480	1.0	2.0	2.0	35	0.02	Z2Z
CMSZDA5V6	5.2	5.6	6.0	5.0	40	400	1.0	1.0	2.0	32	0.03	Z3Z
CMSZDA6V2	5.8	6.2	6.6	5.0	10	150	1.0	3.0	4.0	28	0.04	Z4Z
CMSZDA6V8	6.5	6.8	7.2	5.0	15	80	1.0	2.0	4.0	25	0.05	Z5Z
CMSZDA7V5	7.0	7.5	7.9	5.0	15	80	1.0	1.0	5.0	23	0.05	Z6Z
CMSZDA8V2	7.7	8.2	8.7	5.0	15	80	1.0	0.7	5.0	21	0.06	Z7Z
CMSZDA9V1	8.5	9.1	9.6	5.0	15	100	1.0	0.5	6.0	18	0.06	Z8Z
CMSZDA10V	9.4	10	10.6	5.0	20	150	1.0	0.2	7.0	16	0.07	Z9Z
CMSZDA11V	10.4	11	11.6	5.0	20	150	1.0	0.1	8.0	15	0.07	Y1Y
CMSZDA12V	11.4	12	12.7	5.0	25	150	1.0	0.1	8.0	13	0.07	Y2Y
CMSZDA13V	12.4	13	14.1	5.0	30	170	1.0	0.1	8.0	12	0.08	Y3Y
CMSZDA15V	13.8	15	15.6	5.0	30	200	1.0	0.05	10.5	11	0.08	Y4Y
CMSZDA16V	15.3	16	17.1	5.0	40	200	1.0	0.05	11.2	10	0.08	Y5Y

R5 (9-February 2010)

CMSZDA2V4 THRU CMSZDA47V


**SURFACE MOUNT
DUAL, COMMON ANODE
SILICON ZENER DIODES
275mW, 2.4 THRU 47 VOLTS**



ELECTRICAL CHARACTERISTICS PER DIODE - Continued: ($T_A=25^{\circ}\text{C}$) $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$ (for all types)

TYPE	ZENER VOLTAGE V _Z @ I _{ZT}			TEST CURRENT I _{ZT}	MAXIMUM ZENER IMPEDANCE Z _{ZT} @ I _{ZT} Z _{ZK} @ I _{ZK}			MAXIMUM REVERSE CURRENT I _R @ V _R		MAXIMUM ZENER CURRENT I _{ZM}	MAXIMUM ZENER VOLTAGE TEMP. COEFF. θV _Z	MARKING CODE
	MIN	NOM	MAX		Ω	Ω	μA	V				
	V	V	V		mA	Ω	mA	V	% / °C			
CMSZDA18V	16.8	18	19.1	5.0	45	225	1.0	0.05	12.6	9.2	0.08	Y6Y
CMSZDA20V	18.8	20	21.2	5.0	55	225	1.0	0.05	14	8.3	0.08	Y7Y
CMSZDA22V	20.8	22	23.3	5.0	55	250	1.0	0.05	15.4	7.6	0.09	Y8Y
CMSZDA24V	22.8	24	25.6	5.0	70	250	1.0	0.05	16.8	7.0	0.09	Y9Y
CMSZDA27V	25.1	27	28.9	2.0	80	300	0.5	0.05	18.9	6.2	0.09	10W
CMSZDA30V	28	30	32	2.0	80	300	0.5	0.05	21	5.6	0.09	11W
CMSZDA33V	31	33	35	2.0	80	325	0.5	0.05	23.1	5.0	0.09	12W
CMSZDA36V	34	36	38	2.0	90	350	0.5	0.05	25.2	4.6	0.09	13W
CMSZDA39V	37	39	41	2.0	130	350	0.5	0.05	27.3	4.3	0.09	14W
CMSZDA43V	40	43	46	2.0	150	375	0.5	0.05	30.1	3.9	0.10	15W
CMSZDA47V	44	47	50	2.0	170	375	0.5	0.05	32.9	3.5	0.10	16W

SOT-323 CASE - MECHANICAL OUTLINE

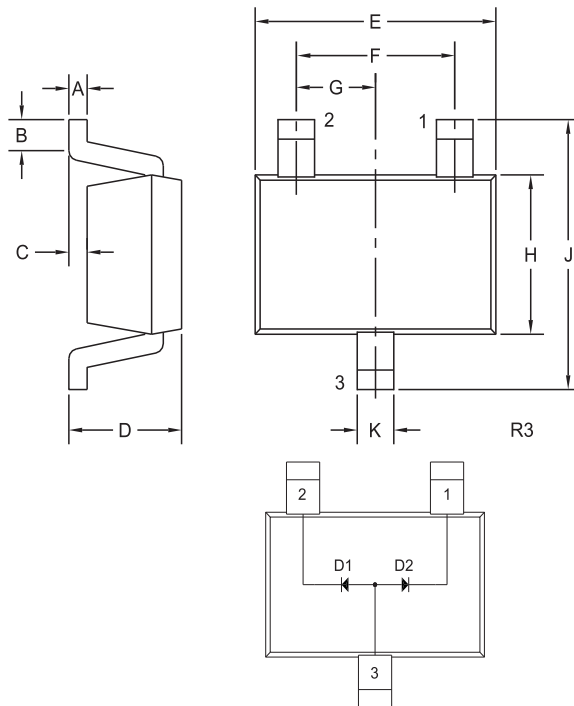

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.002	0.008	0.05	0.20
B	0.004	-	0.10	-
C	-	0.004	-	0.10
D	0.031	0.043	0.80	1.10
E	0.071	0.087	1.80	2.20
F	0.051		1.30	
G	0.026		0.65	
H	0.045	0.053	1.15	1.35
J	0.079	0.087	2.00	2.20
K	0.008	0.016	0.20	0.40

SOT-323 (REV: R3)

LEAD CODE:

- 1) Cathode D2
- 2) Cathode D1
- 3) Anode D1, D2

R5 (9-February 2010)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centalsemi.com

Worldwide Field Representatives:
www.centalsemi.com/wwreps

Worldwide Distributors:
www.centalsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centalsemi.com/terms

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor:

[CMSZDAV9](#) [CMSZDA47V](#) [CMSZDA2V4](#) [CMSZDA5V1](#) [CMSZDA10V](#) [CMSZDA3V0](#) [CMSZDA3V9](#) [CMSZDA36V](#)
[CMSZDA3V3](#) [CMSZDA2V7](#) [CMSZDA4V3](#) [CMSZDA33V](#) [CMSZDA6V2](#) [CMSZDA18V](#) [CMSZDA20V](#) [CMSZDA7V5](#)
[CMSZDA15V](#) [CMSZDA24V](#) [CMSZDA11V](#) [CMSZDA4V7](#) [CMSZDA16V](#) [CMSZDA5V6](#) [CMSZDA3V6](#) [CMSZDA39V](#)
[CMSZDA9V1](#) [CMSZDA43V](#) [CMSZDA30V](#) [CMSZDA27V](#) [CMSZDA6V8](#) [CMSZDA13V](#) [CMSZDA22V](#) [CMSZDA12V](#)
[CMSZDA8V2](#) [CMSZDA10V TR](#) [CMSZDA2V4 TR](#) [CMSZDA15V TR](#) [CMSZDA16V TR](#) [CMSZDA18V TR](#)
[CMSZDA2V7 TR](#) [CMSZDA12V TR](#) [CMSZDA3V3 TR](#) [CMSZDA5V6 TR](#) [CMSZDA11V TR](#) [CMSZDA9V1 TR](#)
[CMSZDA8V2 TR](#) [CMSZDA5V1 TR](#) [CMSZDA20V TR](#) [CMSZDA24V TR](#) [CMSZDA30V TR](#) [CMSZDA33V TR](#)
[CMSZDA4V7 TR](#) [CMSZDA3V0 TR](#) [CMSZDA39V TR](#) [CMSZDA22V TR](#) [CMSZDA27V TR](#) [CMSZDA3V6 TR](#)
[CMSZDA4V3 TR](#) [CMSZDA6V2 TR](#) [CMSZDA7V5 TR](#) [CMSZDA13V TR](#) [CMSZDA36V TR](#) [CMSZDA43V TR](#)
[CMSZDA47V TR](#) [CMSZDA6V8 TR](#)