
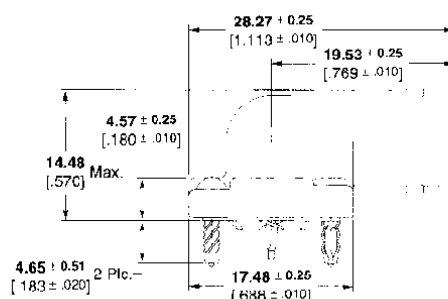


AMP**RF Coax Connectors****Decoupled Connectors (Continued)****Press-Fit, Right Angle BNC
Jacks, PC Board Mount
Decoupled to Board**

Part No. 1274026-1 50 Ohm
Part No. 1274027-1 75 Ohm

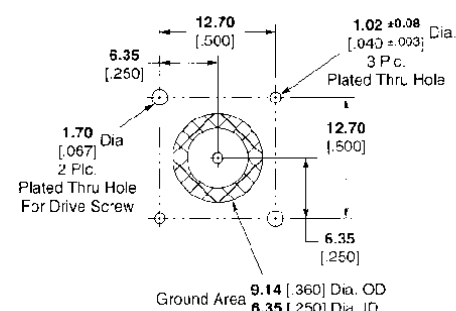


Recommended PC Board Layout

**Press-Fit, Vertical BNC
Jacks, PC Board Mount
Decoupled to Board****Material**


Dielectric—TEFLON
Isolation Pad Polyester

Plating



Body—Nickel
Ground Clip—Nickel
Center Contact—Gold
Action Pin Legs—Gold

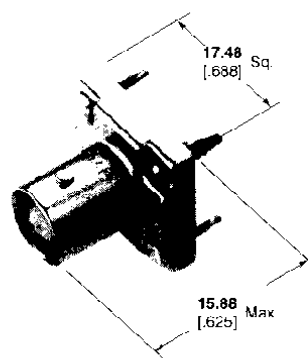

Part No. 414553-1 50 Ohm
Part No. 414493-1 75 Ohm

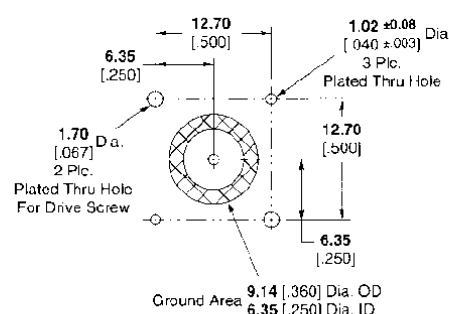

Recommended PC Board Layout

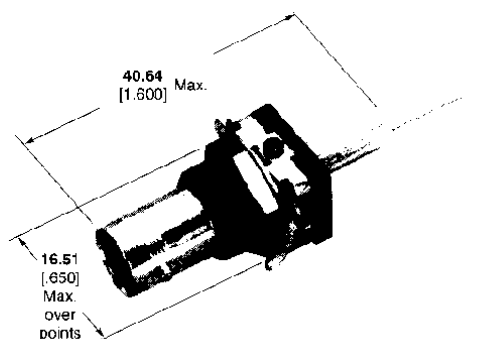**BNC Bulkhead Jacks,
Crimp**

Recommended Panel Cutout

Connector Cable Range Selection Code	RG/U Cable	Termination Type	Center Contact Plating	Body Plating	Dielectric	Style	Interchangeable Dies for Hand Tool 69710-1 & 626 Pneu. Head 318161-1	Part No.
50Ω D	RG58, 58A, 58B, 58C	Hex Crimp	Gold	Nickel	Polymethylpentene	Commercial	58436-1	414758-1
50Ω B	RG174, 174A, 316, 188, 188A	Hex Crimp	Gold	Nickel	Polymethylpentene	Commercial	58436-3	414758-2
75Ω —	RG179, 187	Hex Crimp	Gold	Nickel	Polymethylpentene	Commercial	58425-2	414614-1
75Ω —	Belden 6259	Hex Crimp	Gold	Nickel	Polymethylpentene	Commercial	58425-1	414614-3