





3.5 mm Blind Mate Connectors

Bulkhead Plug



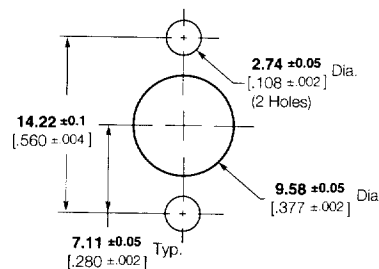


2-Hole Panel Plug



Maximum Panel Thickness 4.83 [.190]
Recommended Panel Cutout

Bulkhead Jack



BMA Mount

BMB Mount

Maximum Panel Thickness 3.18 [.125]
Recommended Panel Cutouts

Lockwasher and Jam Nut



Part No.
1-22145-3



Part No.
2-332004-0


RG/U Cable	Connector Configuration	Hand Tool Kit No. 59981-1		Part No.
		Die Set	Locator*	
174, 188, 316	2-Hole Panel Plug	***	—	447314-1
	Bulkhead Jack (BMA Mount Cutout)	***	—	447315-1
	Bulkhead Plug	**	—	1274113-1
316 Double Braid	Bulkhead Plug	***	—	1274113-1
402 Semi-Rigid/ 3.58 [.141]	2-Hole Panel Plug	312253-1	313745-1	222200-1
405 Semi-Rigid/ 2.18 [.086]	Bulkhead Plug	312253-2	313745-1	222197-1
	Bulkhead Jack (BMB Mount Cutout)	312253-2	313746-1	222196-1

*Not included in Hand Tool Kit No. 59981-1; must be purchased separately.


**See drawing for tooling information.

***Use hand tool 220061-1 to crimp contact and ferrule.


**Right Angle PC Board
Bulkhead Jack**

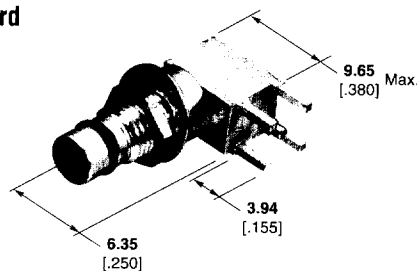

Part No. 448089-1

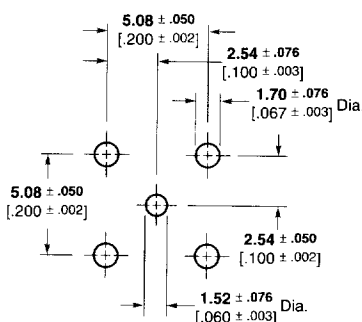

Recommended PCB Layout



Recommended Panel Cutout