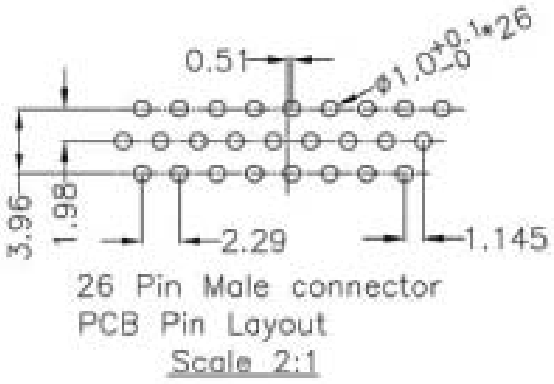

26 Pin Male connector
PCB Pin Layout
Scale 2:1

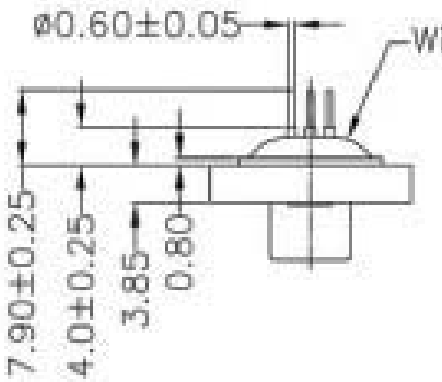

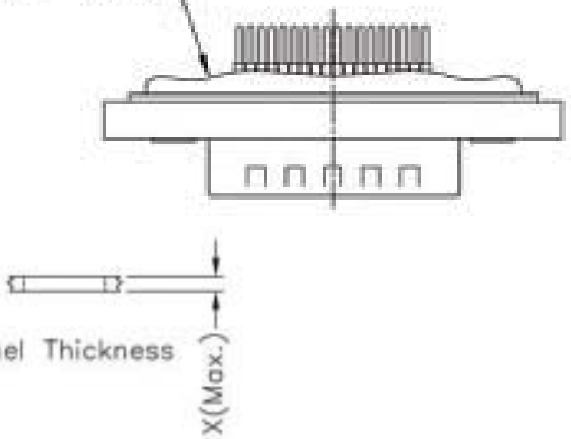

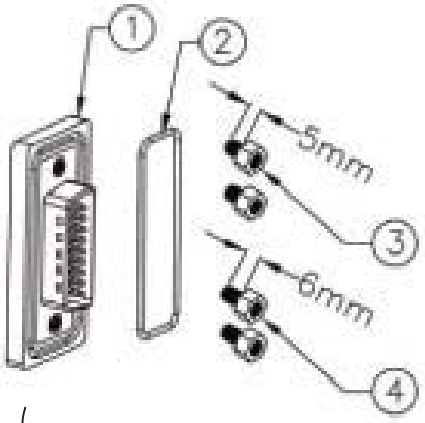

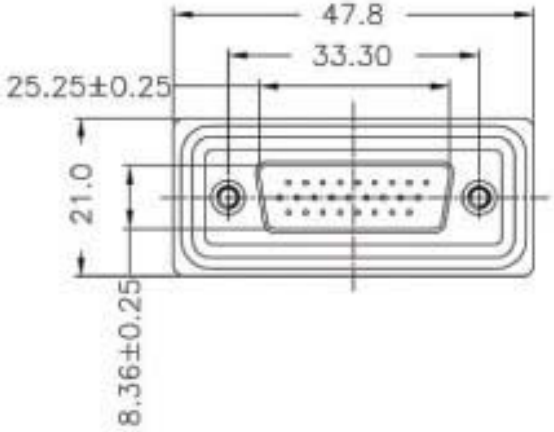

Screw L=5.0 For Panel Thickness Under 1.2mm

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm



Recommended Panel Cut-Out

Material:

- Waterproof Rate: IP67
- Connector: Black, Nylon+GF
- Pin: Copper Alloy, Gold Plated



RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	11.30.11	Chappell
Approved		

ASSMANN WSW components

Item No. **A-HDS26PP-WP-R**

Title D-Sub, High Density, Male, 26 Pin, 180°

Drawing No.

rev00

Replace

Sheet