

6V/430mW single-channel power amplifier

BA526

The BA526 is a high-output monolithic power amplifier with excellent audio quality. With a 6V power supply, it has a rated output of 430mW into an 8 Ω load (THD = 10%), and a maximum output of 700mW. It comes in a compact 9-pin SIP package.


●Applications

Portable radios,
TV sets,
cassette recorders,
interphones,
and wireless trancellers


●Features

- 1) High output. $P_{OUT} = 430mW$ ($V_{CC} = 6V$ and an 8 Ω load (THD = 10%).
- 2) Good low voltage characteristics. Begins operating at 2V.
- 3) Easy-to-mount 9-pin SIP package.
- 4) Extremely low high-frequency distortion with small signals. Uses soft clipping for good audio quality.
- 5) Power-on "pop" noise is suppressed.
- 6) Low noise.

●Block diagram

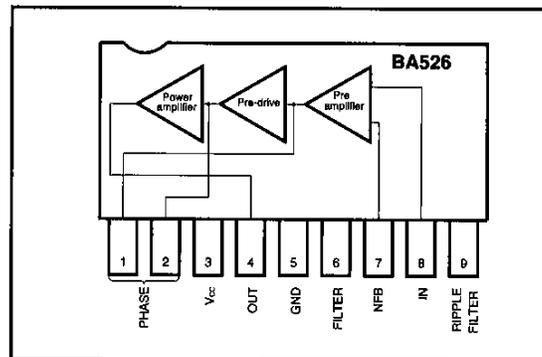

● Internal circuit diagram

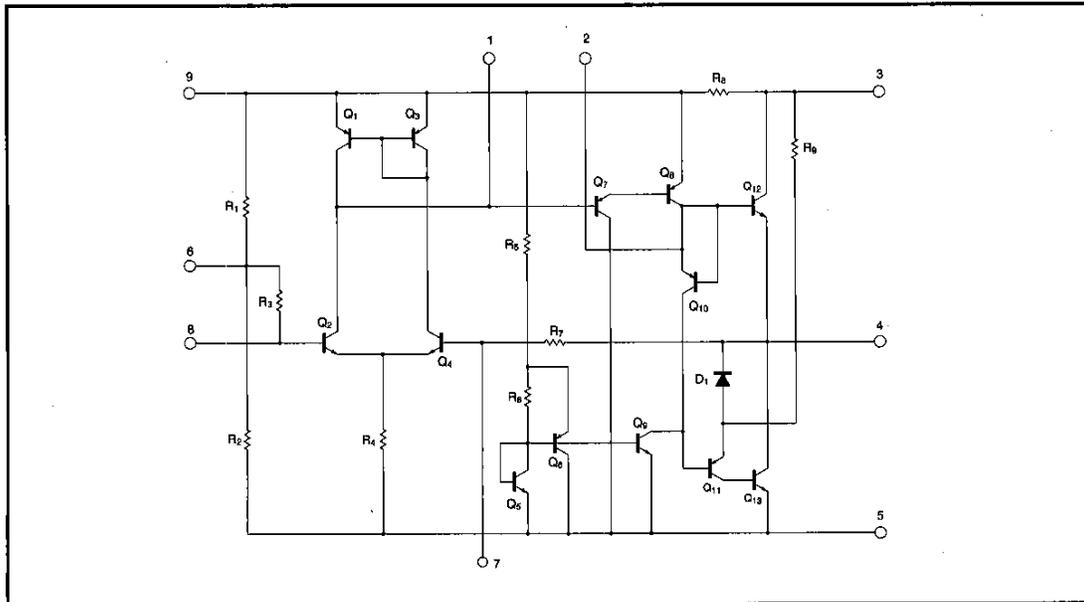

● Absolute maximum ratings (Ta = 25°C)

| Parameter | Symbol | Limits | Unit |
|-----------------------|------------------|---------|------|
| Supply voltage | V _{CC} | 9 | V |
| Power dissipation | P _d | 950* | mW |
| Operating temperature | T _{opr} | -10~65 | °C |
| Storage temperature | T _{stg} | -30~125 | °C |

* Reduced by 9.5mW for each increase in Ta of 1°C over 25°C.

● Electrical characteristics (unless otherwise specified Ta = 25°C, V_{CC} = 6V, R_L = 8Ω and f = 1kHz)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Condition | Measurement Circuit |
|-----------------------------|------------------|------|------|------|-------------------|---|---------------------|
| Quiescent circuit current | I _Q | — | 12 | 24 | mA | V _{IN} =0V _{rms} | Fig.1 |
| Closed-circuit voltage gain | G _{VC} | 48 | 52 | 54 | dB | R _{NF} =47Ω, V _{IN} =2.5mV _{rms} | Fig.1 |
| Maximum output power | P _{OM} | 600 | 700 | — | mW | V _{IN} =25mV _{rms} | Fig.1 |
| Rated output power | P _{OUT} | 350 | 430 | — | mW | THD=10% | Fig.1 |
| Output noise voltage | V _{NO} | — | 0.25 | 0.7 | mV _{rms} | R _g =0Ω | Fig.1 |
| Total harmonic distortion | THD | — | 0.4 | 2 | % | P _O =50mW | Fig.1 |
| Input resistance | R _{IN} | — | 22 | — | kΩ | P _O =50mW | Fig.1 |

● Measurement circuit

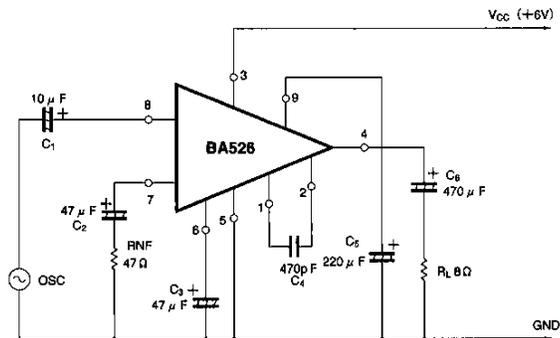


Fig. 1

● Application example

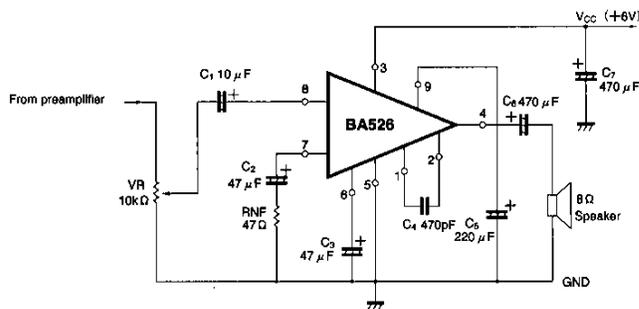


Fig. 2

● External dimensions (Unit: mm)

