
## NOTES:

- 1.0 MATERIAL:
- 1.1 HOUSING: STAINLESS STEEL PER ASTM-A-582 TYPE 303.
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, ASTM-B196.
- 1.3 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1457.
- 2.0 PLATING:
- 2.1 CENTER CONTACT: GOLD PER MIL-G-45204 TYPE II, CLASS 2.
- 3.0 MECHANICAL:
- 3.1 INTERFACE PER MIL-STD-348 IN ACCORDANCE WITH MIL-A-55339.
- 3.2 CENTER CONTACT CAPTURED IN ACCORDANCE WITH MIL-A-55339.
- 4.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

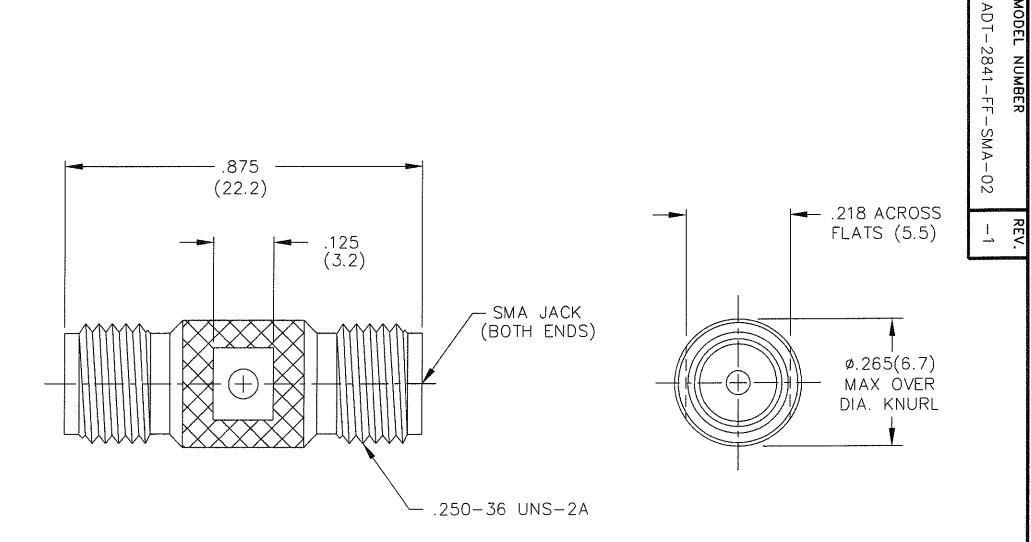

REV.	REV. DESCRIPTION	DATE
-	RELEASED	1/31/97
-1	ADDED TITLEBLOCK	3/17/05

UNLESS OTHERWISE NOTED DIMENSIONS	34078 MIDWEST MICROWAVE
ARE IN INCHES AND TOLERANCES ARE:	NOTICE: The information ADAPTER contained in this
3 PLACE DECIMALS ±.005	drawing is proprietary   SAM JACK to SMA JACK
2 PLACE DECIMALS ±.02	and must not be used
FRACTIONS ±1/64	without the permission of Midwest Microwave
PARALLELITY: T.I.R.	DRAWN/DATE ENG./DATE DRAWING NUMBER
FLATNESS: T.I.R.	L.BROWN G.KOZAK  1/24/97 1/30/97 ADT-2841-FF-SMA-02
CONCENTRICITY: T.I.R	CHECKED/DATE J. VERNON
ANGLES AND PERPENDICULARITY: ±1°	$\frac{3.\text{VERNOR}}{1/27/97}$ SCALE: $5=1$ SHEET 1 of 1

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions:

ADT-2841-FF-SMA-02