

Autotransformer AIM 10/5



Picture shows AIM 3,2/1,6


Advantages

Low weight and small size (compared to isolating transformers)
Integrated short circuit and overload protection
Very high efficiency
Very good moisture protection and low noise thanks to XtraDenseFill resin encapsulation (AIM 1.8/8 - AIM 5.0/2.5)
Screw terminals under cover with strain relief

Applications

Autotransformer for adjustment of the voltage on the input and output sides with no requirement for electrical isolation.

Sample application

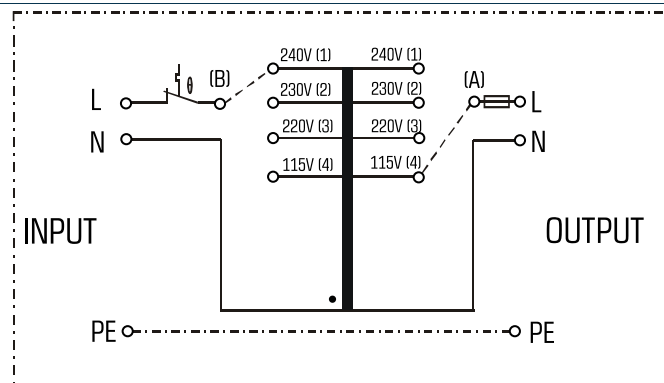

Standards

Autotransformer
to: VDE 0570 Part 2-13, DIN EN 61558-2-13, EN 61558-2-13,
IEC 61558-2-13

Approvals




Autotransformer AIM 10/5

Electrical data

Type	AIM 10/5
Input	
Rated input voltage	115 Vac/220 Vac 230 Vac/240 Vac
Rated frequency	50 - 60 Hz
Output	
Rated output voltage	115 Vac/220 Vac 230 Vac/240 Vac
	5.00 (PRI 115 / SEC 220, 230, 240); 10.00 (PRI 115 / SEC 115); 10.00 (PRI 220, 230, 240 / SEC 115, 220, 230, 240)
Rated output current	18.00 W
No-load loss (typ.)	
	18.00 W
Environment	
Ambient temperature max.	40 °C
Safety and protection	
Type	enclosed
Class of Insulation System	B
Protection index	IP 20
Safety class	I
Short circuit strength	non-inherently short-circuit proof
Order numbers	
Order Number	AIM 10/5

Mechanical data

Type	AIM 10/5
Terminal and mounting	
Fixing method	Fixing holes in the housing
Terminals	Screw-type terminal
Measures and weights	
Weight	12.10 kg

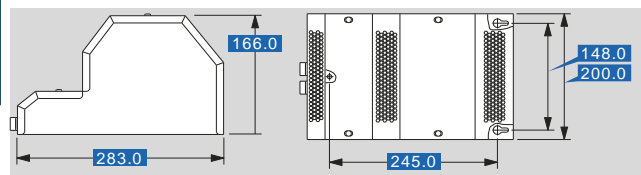

Subjects to change.