


Zero-cross circuit

FEATURES

- Compact DIP type SSR that's ideal for AC load control
- Supports 0.3 A, 0.6 A, 0.9 A and 1.2 A ON-state RMS currents.
- The 1.2 A type saves space with a DIP 8-pin package.

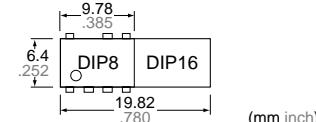

(mm inch)

4. Handles both 100 and 200 V AC loads

This relay handles both voltages in a single product. It is not necessary for users that use both types to manage separate part numbers.

- High dielectric strength: 5,000 V AC (between input and output)
- Two types available: Zero-cross type and Random type

TYPICAL APPLICATIONS

- Home appliances (air conditioner, microwave oven, washing machine, personal hygiene system, refrigerator, fan heater, inductive heating cooker, rice cooker and humidifier, etc.)
- Industrial equipment

TYPES

Type	Output rating*		Type	Part No.			Packing quantity
				Through hole terminal	Surface-mount terminal		
	Repetitive peak OFF-state voltage	ON-state RMS current		Tube packing style	Tape and reel packing style		
AC type	600 V	0.3 A	Zero-cross	AQH0213	AQH0213A	AQH0213AX	AQH0213AZ
		0.6 A		AQH1213	AQH1213A	AQH1213AX	AQH1213AZ
		0.9 A		AQH2213	AQH2213A	AQH2213AX	AQH2213AZ
		1.2 A		AQH3213	AQH3213A	AQH3213AX	AQH3213AZ
	600 V	0.3 A	Random	AQH0223	AQH0223A	AQH0223AX	AQH0223AZ
		0.6 A		AQH1223	AQH1223A	AQH1223AX	AQH1223AZ
		0.9 A		AQH2223	AQH2223A	AQH2223AX	AQH2223AZ
		1.2 A		AQH3223	AQH3223A	AQH3223AX	AQH3223AZ

*Indicate the repetitive peak OFF-state voltage and ON-state RMS current: peak AC.

Note: For space reasons, the SMD terminal shape indicator "A" and the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	AQH0213, AQH0223	AQH1213, AQH1223	AQH2213, AQH2223	AQH3213, AQH3223	Remarks
Input	LED forward current	I _F		50 mA		
	LED reverse voltage	V _R		6 V		
	Peak forward current	I _{FP}		1 A		f = 100 Hz, Duty Ratio = 0.1%
Output	Repetitive peak OFF-state voltage	V _{DRM}		600 V		
	ON-state RMS current	I _{T(RMS)}	0.3 A	0.6 A	0.9 A	1.2 A
	Non-repetitive surge current	I _{TSM}	3 A	6 A	9 A	12 A
I/O isolation voltage	V _{Iso}			5,000 V AC		60Hz, 1 cycle
Temperature limits	Operating	T _{opr}		-30°C to +85°C -22°F to +185°F		
	Storage	T _{stg}		-40°C to +125°C -40°F to +257°F		

Note: "A", "AX" and "AZ" at the end of the part numbers have been omitted.

AQ-H


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQH0213, AQH1213, AQH2213, AQH3213	AQH0223, AQH1223, AQH2223, AQH3223	Condition
Input	LED dropout voltage	Typical	V_F	1.21 V		$I_F = 20 \text{ mA}$
	Maximum			1.3 V		
Input	LED reverse current	Typical	I_R	—		$V_R = 6 \text{ V}$
	Maximum			10 μA		
Output	Peak OFF-state current	Typical	I_{DRM}	—		$I_F = 0 \text{ mA}$ $V_{DRM} = 600 \text{ V}$
	Maximum			100 μA		
	Peak ON-state voltage	Typical	V_{TM}	—		$I_F = 10 \text{ mA}$ $I_{TM} = \text{Max.}$
	Maximum			2.5 V		
Output	Holding current	Typical	I_H	—		
	Maximum			25 mA		
Critical rate of rise of OFF-state voltage			dv/dt	200 V/ μs		$V_{DRM} = 600 \text{ V} \times 1/M_2$
Transfer characteristics	Trigger LED current	Maximum	I_{FT}	10 mA		$V_D = 6 \text{ V}$ $R_L = 100 \Omega$
	Zero-cross voltage	Maximum	V_{ZC}	50 V	—	$I_F = 10 \text{ mA}$
	Turn on time*	Maximum	T_{ON}	100 μs		$I_F = 20 \text{ mA}$ $V_D = 6 \text{ V}$ $R_L = 100 \Omega$
	I/O isolation resistance	Minimum	R_{ISO}	50 G Ω		500 V DC

Notes: 1. For type of connection, see page 3.

2. "A", "AX" and "AZ" at the end of the part numbers have been omitted.

*Turn on time

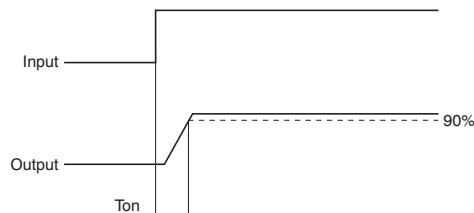

RECOMMENDED OPERATING CONDITIONS


Please follow the conditions below in order to ensure accurate operation and release of the phototriac coupler.

Item	Symbol	Value	Unit
Input LED current	I_F	20	mA

REFERENCE DATA


1. ON-state RMS current vs. Ambient temperature characteristics

Allowable ambient temperature:
-30°C to +85°C -22°F to +185°F

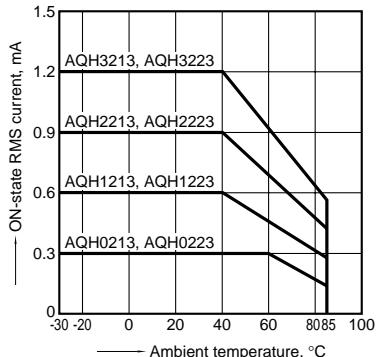


2. On voltage vs. Ambient temperature characteristics

LED current: 10 mA; ON current: Max.
Measured portion: between terminals 6 and 8

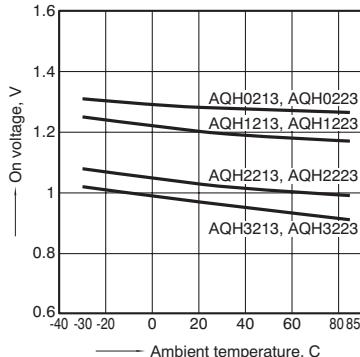


3. Trigger LED current vs. Ambient temperature characteristics

Load voltage: 6 V DC;
Load resistance: 100Ω

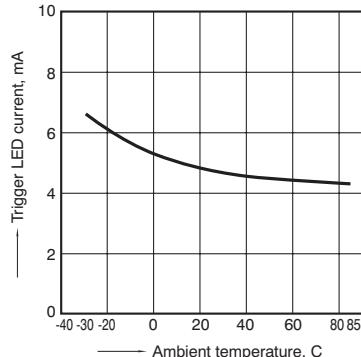

4. LED dropout voltage vs. Ambient temperature characteristics


LED current: 10 to 50 mA

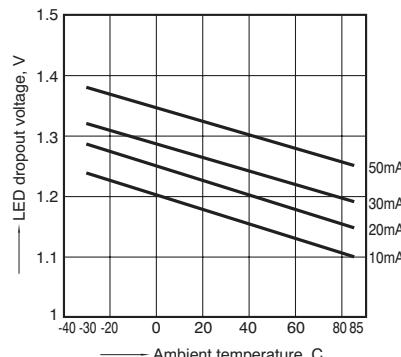

5. Turn on time vs. LED current characteristics


Load voltage: 6 V DC; Load resistance: 100Ω

Measured portion: between terminals 6 and 8

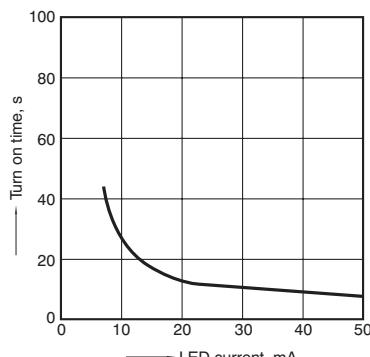


6. Repetitive peak OFF-state current vs. Load voltage characteristics


LED current: 0 mA; Measured portion: between terminals 6 and 8; Ambient temperature: 25°C 77°F

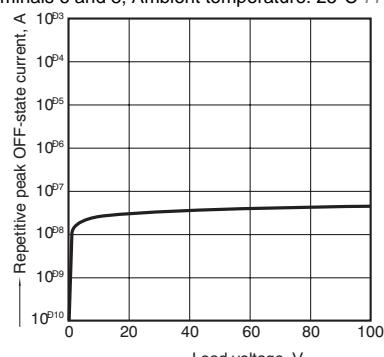

7. Hold current vs. Ambient temperature characteristics

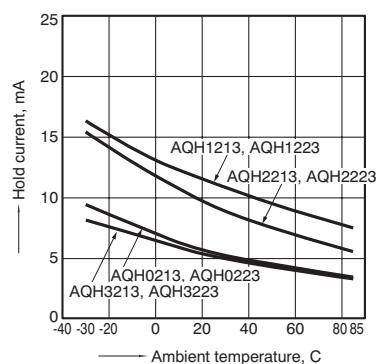


8. Zero-cross voltage vs. Ambient temperature characteristics
LED current: 10 mA

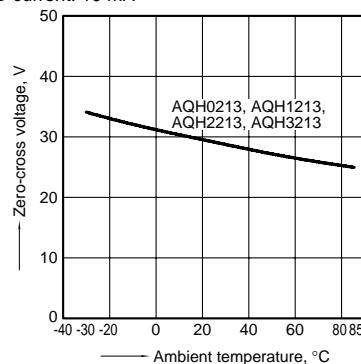


DIMENSIONS (mm inch)

Through hole terminal type

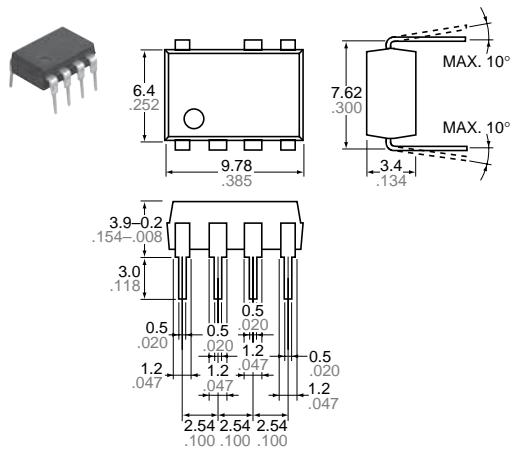


Terminal thickness: 0.25 .010
General tolerance: $\pm 0.1 \pm .004$

Surface mount terminal type

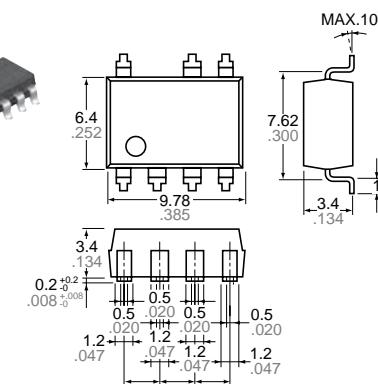


Terminal thickness: 0.25 .010
General tolerance: $\pm 0.1 \pm .004$

PC board pattern (BOTTOM VIEW)

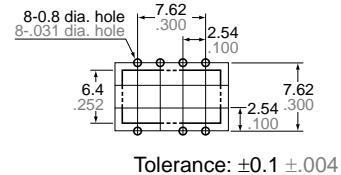

Tolerance: $\pm 0.1 \pm .004$

Recommended mounting pad (TOP VIEW)



Tolerance: $\pm 0.1 \pm .004$

SCHEMATIC AND WIRING DIAGRAMS

Notes: E₁: Power source at input side; I_F: Trigger LED forward current; V_L: Load voltage; I_L: Load current;

Schematic	Output configuration	Load	Wiring diagram
	1a	AC	
	1b	AC	

See special section on AQ-H in Cautions for Use