

Data Sheet

SR215xxVBNC

Page 1/4


P/N

AST215xx

xx=number of poles

2015/05/13

Illustration

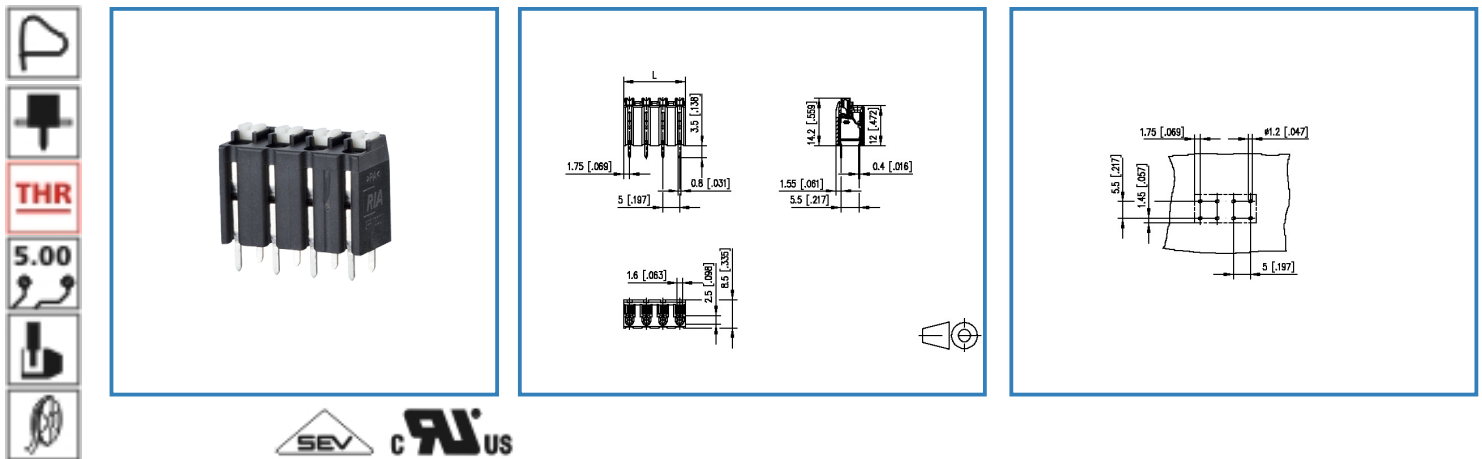

see enlarged drawing at the end of the document

Product specification

- spring clamp terminal block, THR solderable, double solder pins
- centerline 5.00 mm, direction of connection vertical 0°
- fittable without loss of poles
- color black
- Tape & Reel packaging
- push-button
- Connection data

RIA V / A / AWG 300 / 10 / 28 - 16

SEV 1.5 mm² 250 V / 17.5 A / T60



Data Sheet

SR215xxVBNC

Page 2/4

P/N

AST215xx

xx=number of poles

2015/05/13

Technical Data

General Data

Solder pin length	3.5 mm		
min. number of poles	2		
max. number of poles	16		
Insulating material class	CTI 600		
clearance/creepage dist.	3.4 mm		
protection category	IP 20		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	250 V	630 V	630 V
Rated test voltage	4.0 kV	4.0 kV	4 kV
Min. insul. strip length	8.5 mm		

Connection data

 V / A / AWG	300 / 10 / 28 - 16
 1.5 mm ²	250 V / 17.5 A / T60

Material

insulating material	PA66/6T
flammability class	V0
spring material	Spring steel
contact material	CuSn
contact surface	Sn

Climatic properties

upper limit temperature	105 °C
lower limit temperature	-40 °C

General

solderability	Acc. to IPC/JEDEC J-STD-020D-MSL 1
Tolerance	ISO 2768 -mH

Data Sheet

SR215xxVBNC

Page 3/4

P/N


AST215xx

xx=number of poles

2015/05/13

Illustration

Drawing

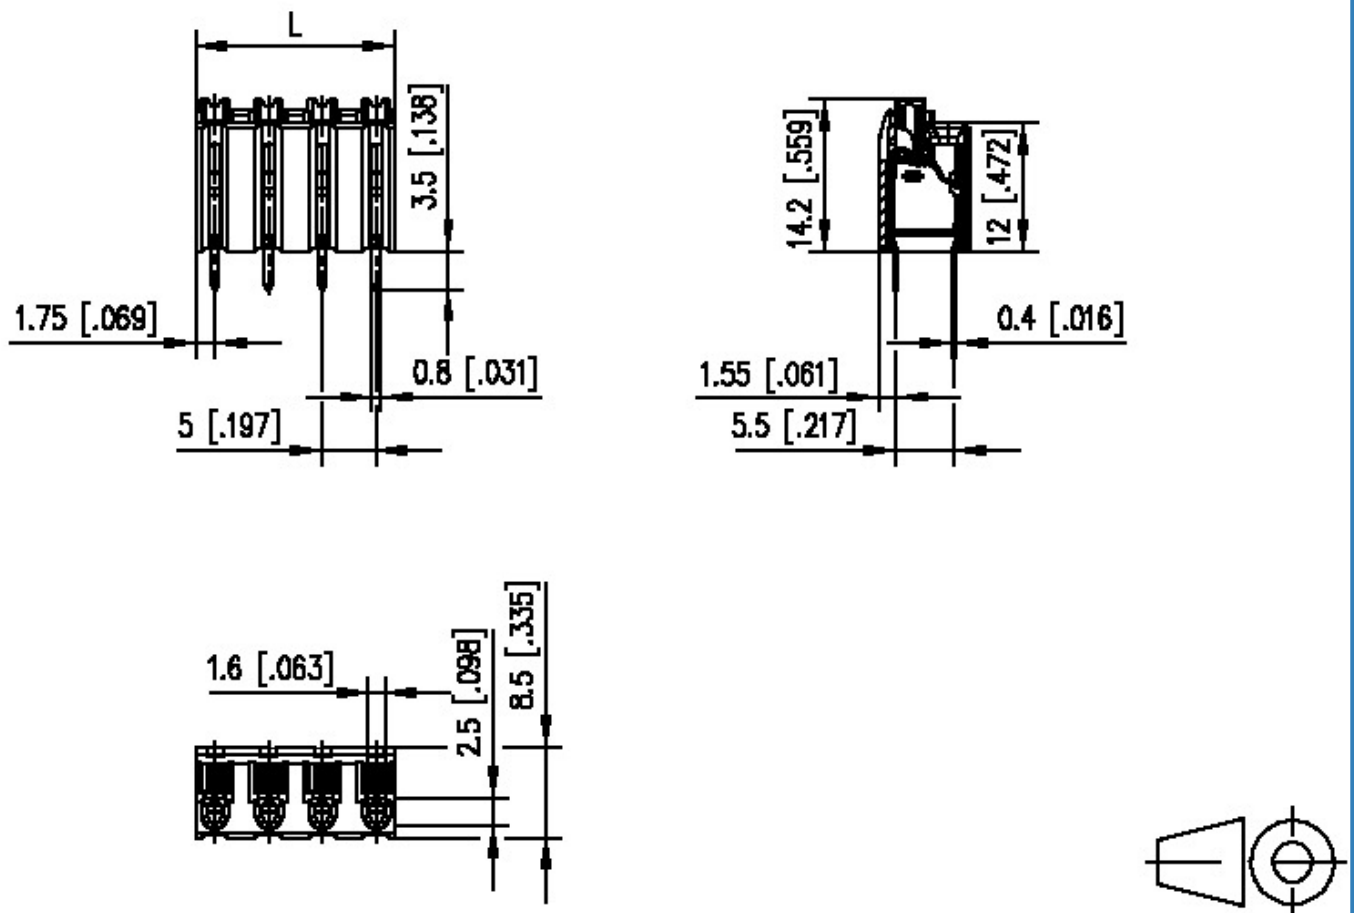

$L = (\text{pole size} - 1) \times \text{centerline} + 3.5 [0.138]$



Data Sheet

SR215xxVBNC

Page 4/4

P/N

AST215xx

xx=number of poles

2015/05/13

PCB Layout

