



REVISIONS			REV.
REV.	DESCRIPTION	DATE	APPROVED
L 0507-02	REDRAWN; ADDED ITEM 11	02/06/04	1

A-770N

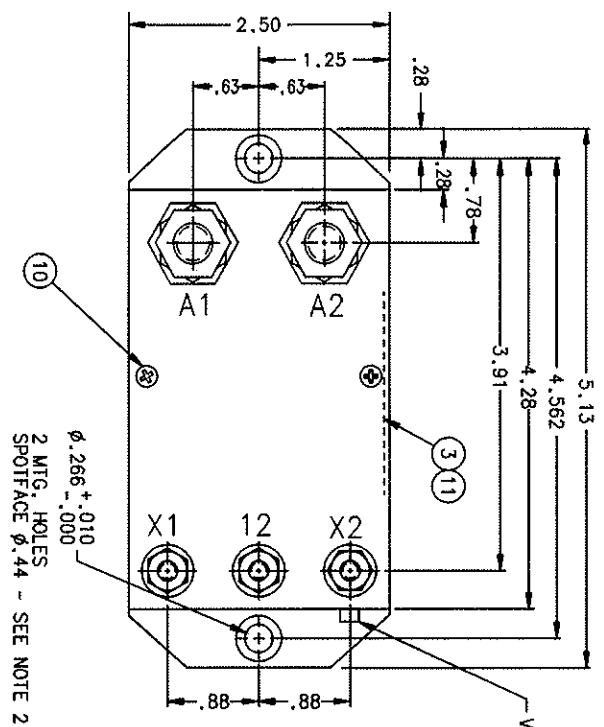


MAXIMUM OPERATING VOLTAGE
PICKUP VOLTAGE (MAX)
DROP-OUT VOLTAGE
RATED CONTACT LOAD
COIL CURRENT AT 25°C
MINIMUM OPERATING PERIOD
MINIMUM OPERATING CYCLES
MAXIMUM WEIGHT
RATED DUTY
AUX. CONTACT

29 VOLTS
18 VOLTS
11.5 VOLTS AT -65°F
7-5.5 VOLTS
300 AMP
.4 AMP
3 HOURS
50,000
1 LB. 15 OZ.
CONTINUOUS
10 AMP, 28 VDC

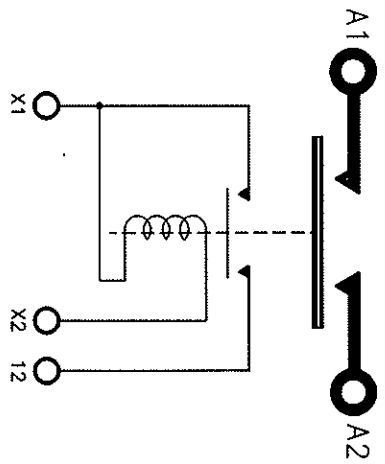

- NOTES:
1. TOLERANCES ON ALL TERMINAL LENGTHS TO BE $\pm .06$.
2. FOR ELECTRICAL PURPOSES, EXPOSE BARE METAL BY SANDING BOTTOM OF BOTH MOUNTING SURFACES AND SPOTFACE TOP OF MOUNTING HOLES $\phi .44$.

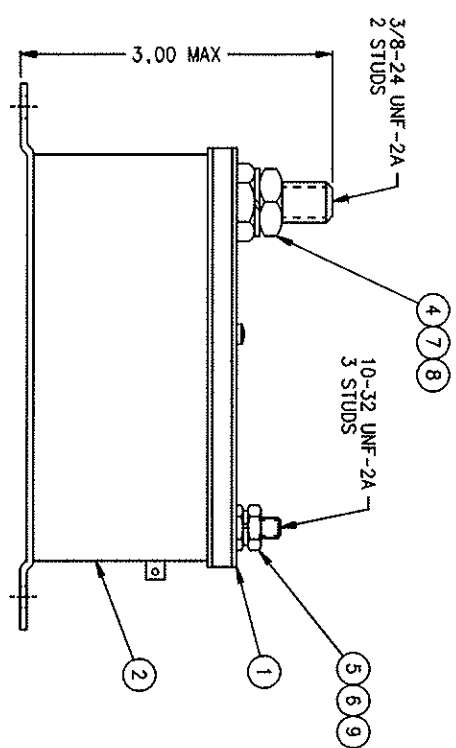

ITEM	QTY	PART OR IDENTIFYING NO	DESCRIPTION	NAME OR IDENTIFYING NO	DESCRIPTION	FSM NO	DRAWING OR SPECIFICATION	MATERIAL OR NOTE
11	1	39529-001	OVERLAY					
10	2	51200-020	SCREW - NO. 4 X 1/4 SHT. METAL					ST. STEEL
9	3	51810-054	WASHER - LOCK NO. 10					BRONZE
8	2	51807-084	WASHER - 688 X 3/8 X .094					BRONZE
7	2	51704-024	WASHER - 5/8 X 25/64 X .062					BRASS
6	3	51702-844	WASHER - 3/8 X 13/64 X .032					BRASS
5	3	50410-084	NUT - 10-32 X 3/8 X 7/32 HEX					BRASS
4	2	50407-164	NUT - 3/8-24 X 5/8 X 7/32 HEX					BRASS
3	1	16043-001	NAMEPLATE					
2	1	14520-060	CONTACTOR ASSEMBLY - PRIMARY					
1	1	10403-004	PLATE - COVER					

tyco Electronics

175 N. DIAMOND STREET, WAREHOUSING, OHIO 44022

CONTACTOR - CONTINUOUS DUTY
300 AMP, 28 VOLTS 093

A-770N

SCALE 1/1 SHEET REF TYCO P/N 3-1616058-3