QUAD/DUAL N-CHANNEL MATCHED PAIR MOSFET ARRAY

GENERAL DESCRIPTION

The ALD1106/ALD1116 are monolithic quad/dual N-channel enhancement mode matched MOSFET transistor arrays intended for a broad range of precision analog applications. The ALD1106/ALD1116 offer high input impedance and negative current temperature coefficient. The transistor pairs are matched for minimum offset voltage and differential thermal response, and they are designed for precision analog switching and amplifying applications in +2V to +12V systems where low input bias current, low input capacitance and fast switching speed are desired. These MOSFET devices feature very large (almost infinite) current gain in a low frequency, or near DC, operating environment. The ALD1106/ALD1116 are building blocks for differential amplifier input stages, transmission gates, and multiplexer applications, current sources and many precision analog circuits.

FEATURES

- Low threshold voltage of 0.7V
- Low input capacitance
- Low Vos 2mV typical
- High input impedance -- $10^{14}\Omega$ typical
- Negative current (I_{DS}) temperature coefficient
- Enhancement-mode (normally off)
- DC current gain 10^9
- Low input and output leakage currents
- RoHS compliant

ORDERING INFORMATION ("L" suffix denotes lead-free (RoHS))

Operating Temperature Range*		
0°C to +70°C	0°C to +70°C	-55°C to +125°C
8-Pin SOIC Package	8-Pin Plastic Dip Package	8-Pin CERDIP Package
ALD1116SAL	ALD1116PAL	ALD1116DA
14-Pin SOIC Package	14-Pin Plastic Dip Package	14-Pin CERDIP Package
ALD1106SBL	ALD1106PBL	ALD1106DB

* Contact factory for leaded (non-RoHS) or high temperature versions.

APPLICATIONS

- Precision current mirrors
- Precision current sources
- Voltage choppers
- Differential amplifier input stage
- Voltage comparator
- Data converters
- Sample and Hold
- Analog signal processing

PIN CONFIGURATION

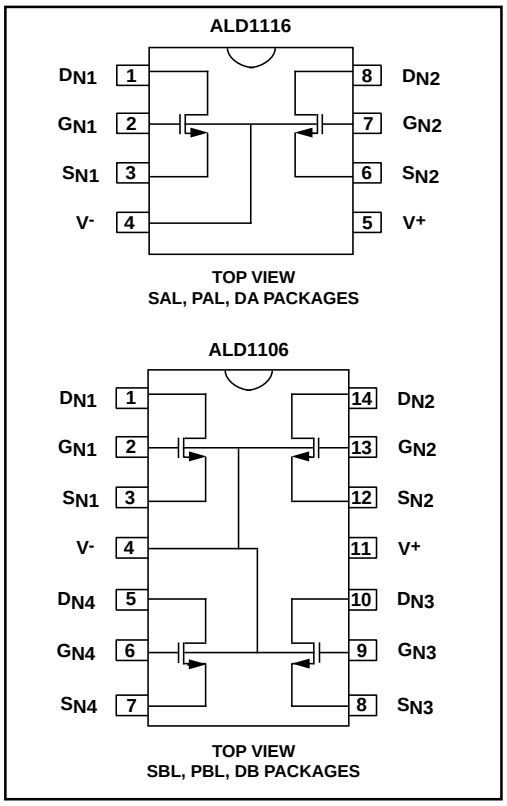

BLOCK DIAGRAM

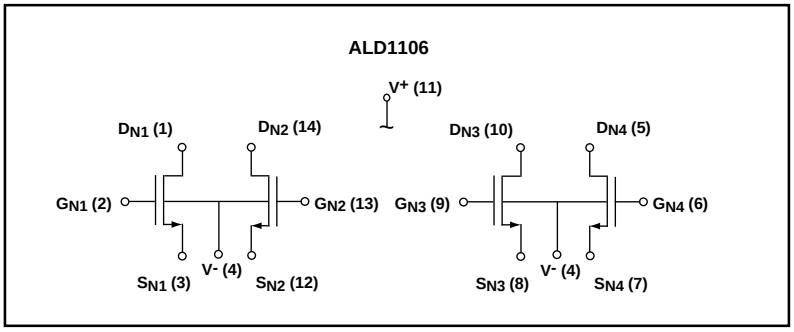

BLOCK DIAGRAM

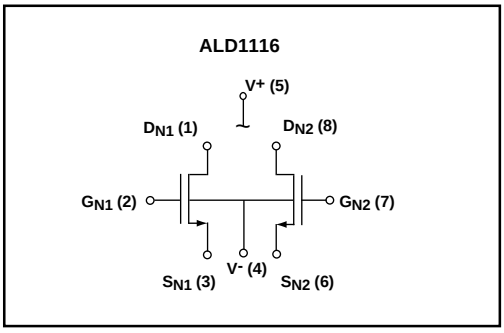

ABSOLUTE MAXIMUM RATINGS

Drain-source voltage, V_{DS} ____ 10.6V
Gate-source voltage, V_{GS} ____ 10.6V
Power dissipation ____ 500mW
Operating temperature range SAL, PAL, SBL, PBL packages ____ 0°C to +70°C
DA, DB packages ____ -55°C to +125°C
Storage temperature range ____ -65°C to +150°C
Lead temperature, 10 seconds ____ +260°C
CAUTION: ESD Sensitive Device. Use static control procedures in ESD controlled environment.

OPERATING ELECTRICAL CHARACTERISTICS
T_A = 25°C unless otherwise specified

Parameter	Symbol	ALD1106 Min	ALD1106 Typ	ALD1106 Max	ALD1116 Min	ALD1116 Typ	ALD1116 Max	Unit	Test Conditions
Gate Threshold Voltage	V_T	0.4	0.7	1.0	0.4	0.7	1.0	V	I_{DS} = 1.0µA V_{GS} = V_{DS}
Offset Voltage V_{GS1}-V_{GS2}	V_{OS}		2	10		2	10	mV	I_{DS} = 10µA V_{GS} = V_{DS}
Gate Threshold Temperature Drift [2]	TC_{VT}		-1.2			-1.2		mV/°C	
On Drain Current	$I_{DS (ON)}$	3.0	4.8		3.0	4.8		mA	V_{GS} = V_{DS} = 5V
Transconductance	G_{IS}	1.0	1.8		1.0	1.8		mmho	V_{DS} = 5V I_{DS}= 10mA
Mismatch	ΔG_{fs}		0.5			0.5		%	
Output Conductance	G_{OS}		200			200		µmho	V_{DS} = 5V I_{DS} = 10mA
Drain Source On Resistance	$R_{DS (ON)}$		350	500		350	500	Ω	V_{DS} = 0.1V V_{GS} = 5V
Drain Source On Resistence Mismatch	$\Delta_{DS (ON)}$		0.5			0.5		%	V_{DS} = 0.1V V_{GS} = 5V
Drain Source Breakdown Voltage	BV_{DSS}	12			12			V	I_{DS} = 1.0µA V_{GS} = 0V
Off Drain Current [1]	$I_{DS (OFF)}$		10	400 4		10	400 4	pA nA	V_{DS} =12V V_{GS} = 0V T_A = 125°C
Gate Leakage Current	I_{GSS}		0.1	10 1		0.1	10 1	pA nA	V_{DS} = 0V V_{GS} = 12V T_A = 125°C
Input Capacitance [2]	C_{ISS}		1	3		1	3	pF	

Notes: [1] Consists of junction leakage currents
[2] Sample tested parameters

TYPICAL PERFORMANCE CHARACTERISITCS

OUTPUT CHARACTERISTICS

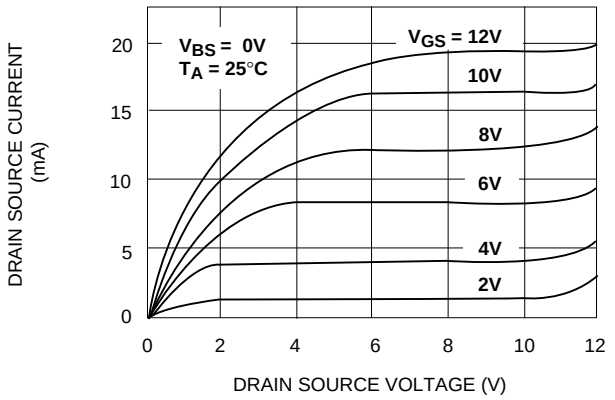

LOW VOLTAGE OUTPUT CHARACTERISTICS

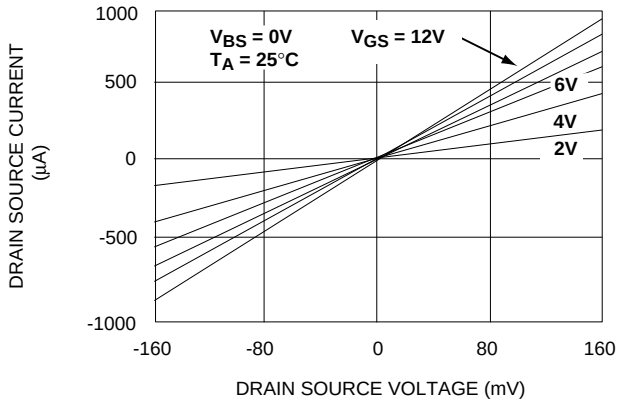

FORWARD TRANSCONDUCTANCE vs. DRAIN SOURCE VOLTAGE

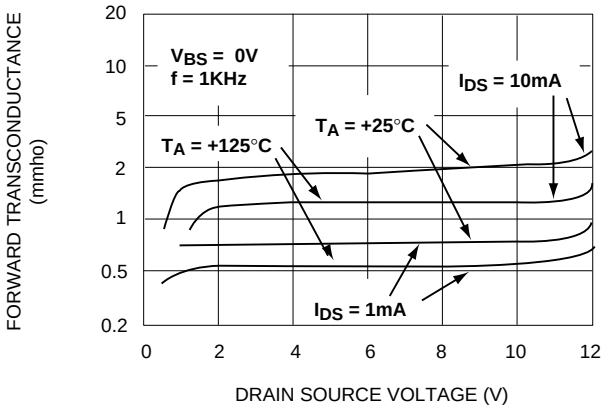

TRANSFER CHARACTERISTIC WITH SUBSTRATE BIAS

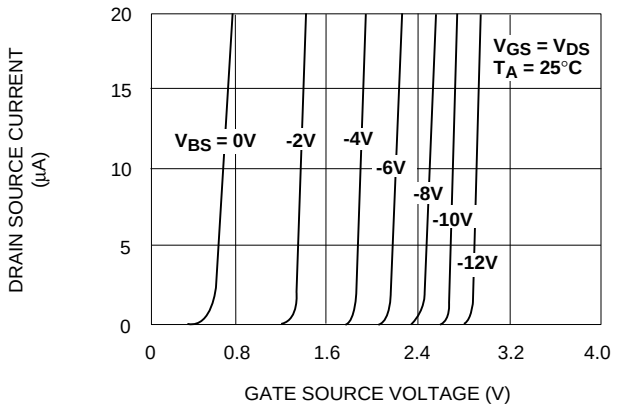

DRAIN SOURCE ON RESISTANCE $R_{DS\ (ON)}$ vs. GATE SOURCE VOLTAGE

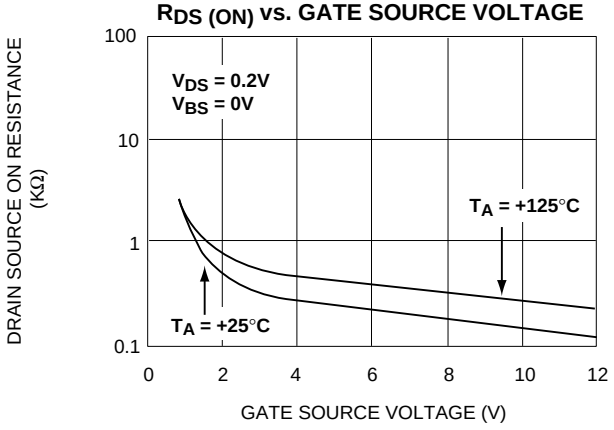

OFF DRAIN CURRENT vs. AMBIENT TEMPERATURE

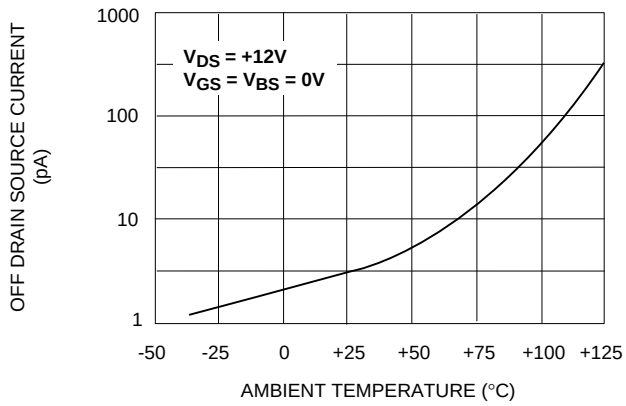

TYPICAL APPLICATIONS

CURRENT SOURCE MIRROR

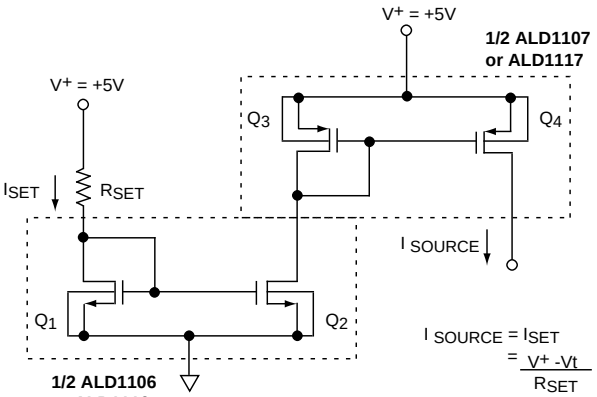

$I_{SOURCE} = I_{SET} = \frac{V^+ - Vt}{R_{SET}} \cong \frac{4}{R_{SET}}$

Q_1, Q_2: N - Channel MOSFET
Q_3, Q_4: P - Channel MOSFET

CURRENT SOURCE WITH GATE CONTROL

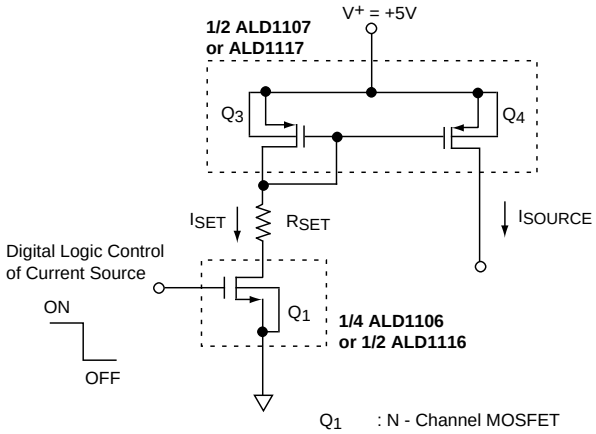

Q_1 : N - Channel MOSFET
Q_3,Q_4 : P - Channel MOSFET

DIFFERENTIAL AMPLIFIER

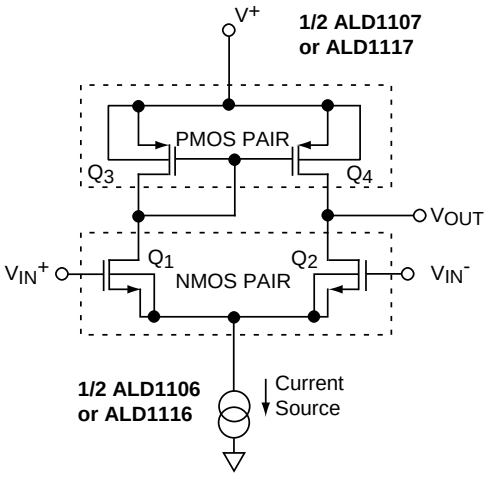

Q_1, Q_2: N - Channel MOSFET
Q_3, Q_4: P - Channel MOSFET

CURRENT SOURCE MULTIPLICATION

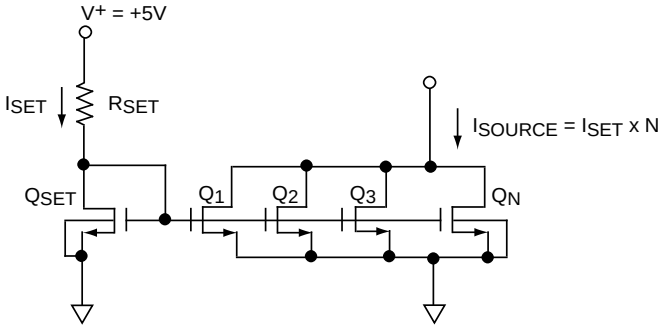

Q_{SET}, Q_1..Q_N: ALD1106 or ALD1116
N - Channel MOSFET

TYPICAL APPLICATIONS (cont.)

BASIC CURRENT SOURCES

N- CHANNEL CURRENT SOURCE

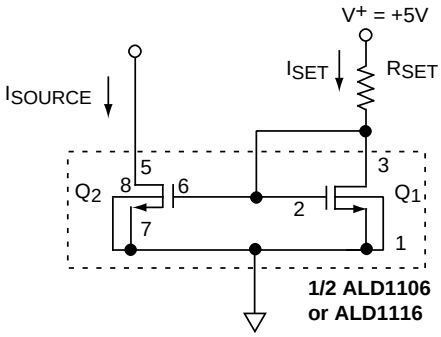

$$I_{SOURCE} = I_{SET} = \frac{V^+ - Vt}{R_{SET}} \cong \frac{V^+ - 1.0}{R_{SET}} \cong \frac{4}{R_{SET}}$$

Q_1, Q_2 : N - Channel MOSFET

P- CHANNEL CURRENT SOURCE

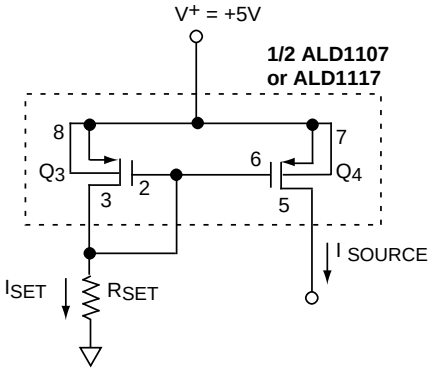

Q_3, Q_4: P - Channel MOSFET

CASCODE CURRENT SOURCES

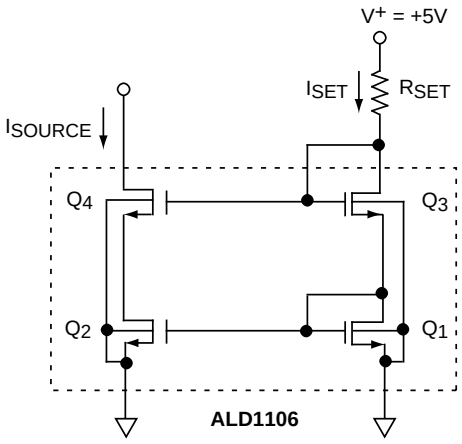

Q_1, Q_2, Q_3, Q_4: N - Channel MOSFET
(ALD1101 or ALD1103)

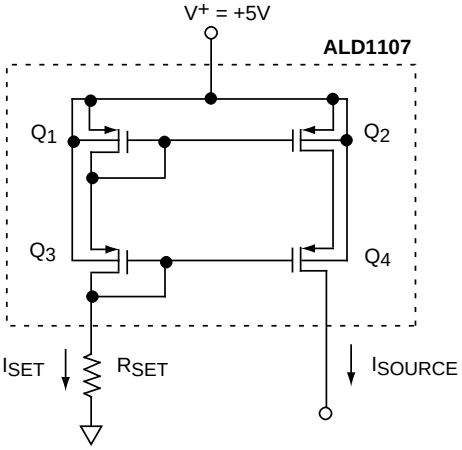

$$I_{SOURCE} = I_{SET} = \frac{V^+ - 2Vt}{R_{SET}} \cong \frac{3}{R_{SET}}$$

Q1, Q2, Q3, Q4: P - Channel MOSFET
(ALD1102 or ALD1103)

SOIC-8 PACKAGE DRAWING

8 Pin Plastic SOIC Package

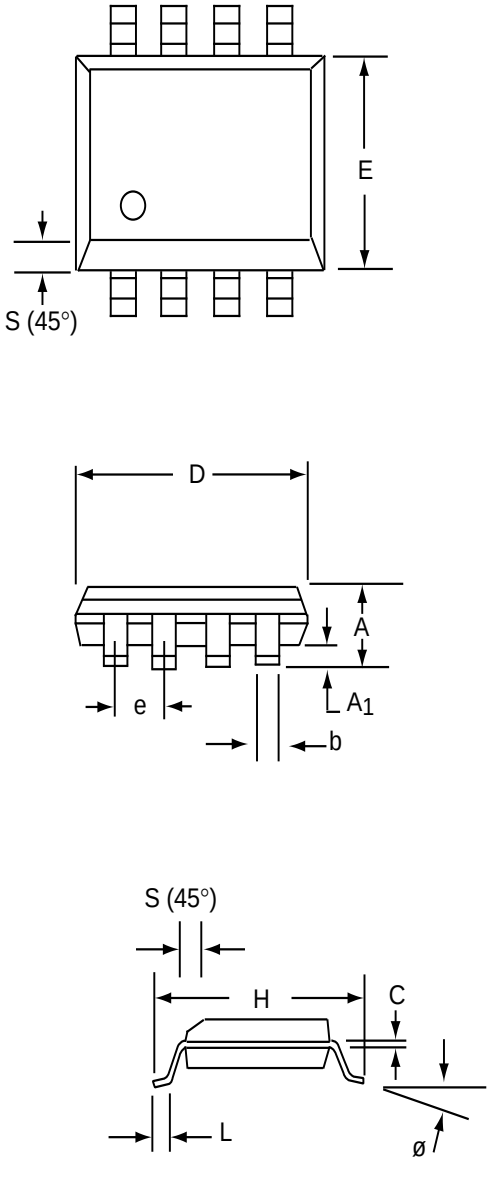

Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	1.35	1.75	0.053	0.069
A_1	0.10	0.25	0.004	0.010
b	0.35	0.45	0.014	0.018
C	0.18	0.25	0.007	0.010
D-8	4.69	5.00	0.185	0.196
E	3.50	4.05	0.140	0.160
e	1.27 BSC		0.050 BSC	
H	5.70	6.30	0.224	0.248
L	0.60	0.937	0.024	0.037
Ø	0°	8°	0°	8°
S	0.25	0.50	0.010	0.020

PDIP-8 PACKAGE DRAWING

8 Pin Plastic DIP Package

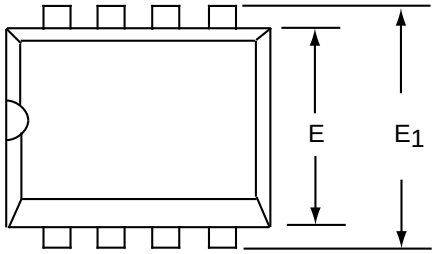

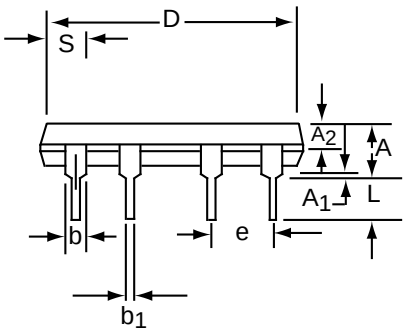



Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	3.81	5.08	0.105	0.200
A_1	0.38	1.27	0.015	0.050
A_2	1.27	2.03	0.050	0.080
b	0.89	1.65	0.035	0.065
b_1	0.38	0.51	0.015	0.020
c	0.20	0.30	0.008	0.012
D-8	9.40	11.68	0.370	0.460
E	5.59	7.11	0.220	0.280
E_1	7.62	8.26	0.300	0.325
e	2.29	2.79	0.090	0.110
e_1	7.37	7.87	0.290	0.310
L	2.79	3.81	0.110	0.150
S-8	1.02	2.03	0.040	0.080
ø	0°	15°	0°	15°

CERDIP-8 PACKAGE DRAWING

8 Pin CERDIP Package

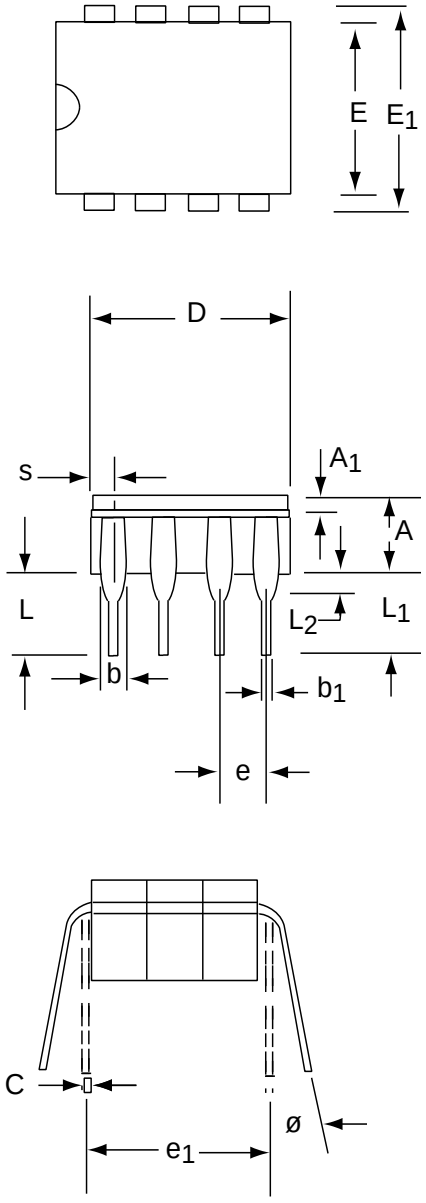

Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	3.55	5.08	0.140	0.200
A_1	1.27	2.16	0.050	0.085
b	0.97	1.65	0.038	0.065
b_1	0.36	0.58	0.014	0.023
C	0.20	0.38	0.008	0.015
D-8	--	10.29	--	0.405
E	5.59	7.87	0.220	0.310
E_1	7.73	8.26	0.290	0.325
e	2.54 BSC		0.100 BSC	
e_1	7.62 BSC		0.300 BSC	
L	3.81	5.08	0.150	0.200
L_1	3.18	--	0.125	--
L_2	0.38	1.78	0.015	0.070
S	--	2.49	--	0.098
Ø	0°	15°	0°	15°

SOIC-14 PACKAGE DRAWING

14 Pin Plastic SOIC Package

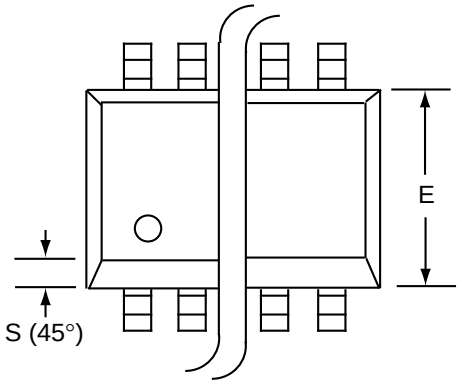

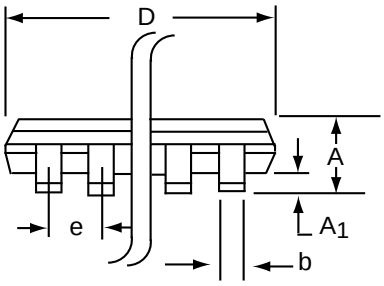

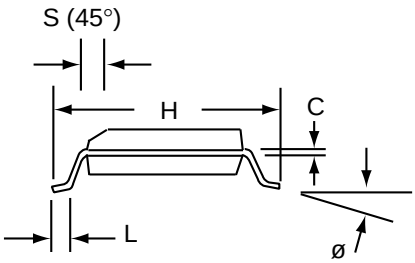

Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	1.35	1.75	0.053	0.069
A_1	0.10	0.25	0.004	0.010
b	0.35	0.45	0.014	0.018
C	0.18	0.25	0.007	0.010
D-14	8.55	8.75	0.336	0.345
E	3.50	4.05	0.140	0.160
e	1.27 BSC		0.050 BSC	
H	5.70	6.30	0.224	0.248
L	0.60	0.937	0.024	0.037
Ø	0°	8°	0°	8°
S	0.25	0.50	0.010	0.020

PDIP-14 PACKAGE DRAWING

14 Pin Plastic DIP Package

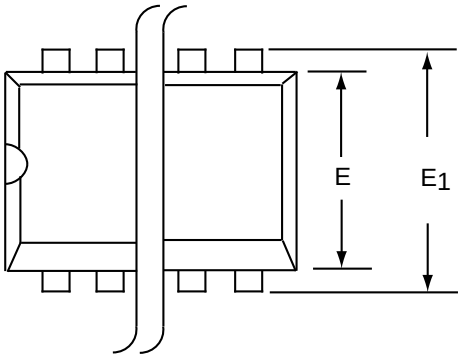

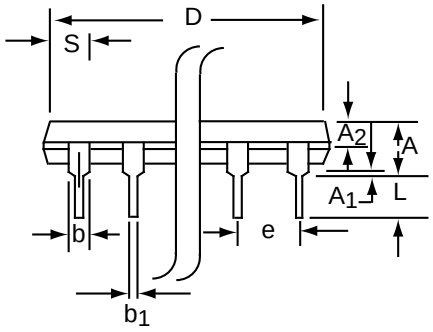



Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	3.81	5.08	0.105	0.200
A_1	0.38	1.27	0.015	0.050
A_2	1.27	2.03	0.050	0.080
b	0.89	1.65	0.035	0.065
b_1	0.38	0.51	0.015	0.020
c	0.20	0.30	0.008	0.012
D-14	17.27	19.30	0.680	0.760
E	5.59	7.11	0.220	0.280
E_1	7.62	8.26	0.300	0.325
e	2.29	2.79	0.090	0.110
e_1	7.37	7.87	0.290	0.310
L	2.79	3.81	0.110	0.150
S-14	1.02	2.03	0.040	0.080
ø	0°	15°	0°	15°

CERDIP-14 PACKAGE DRAWING

14 Pin CERDIP Package

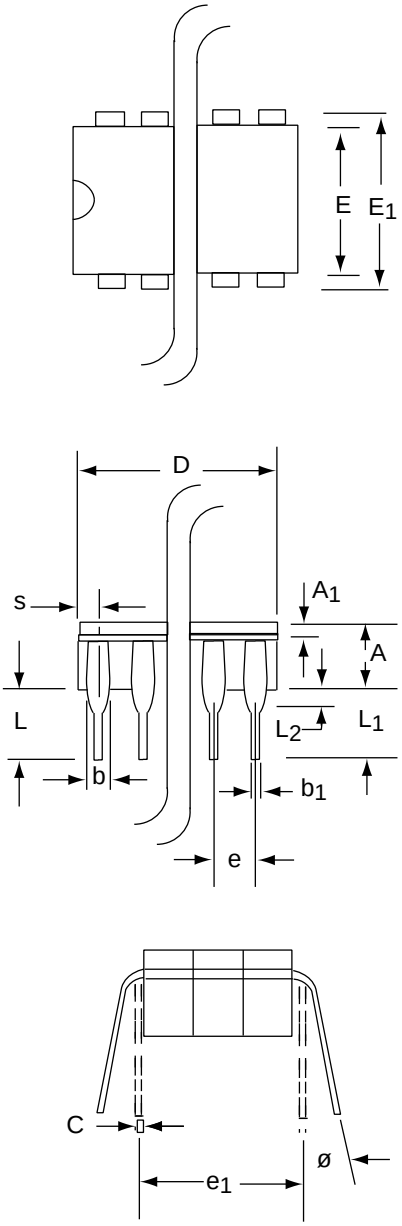

Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	3.55	5.08	0.140	0.200
A_1	1.27	2.16	0.050	0.085
b	0.97	1.65	0.038	0.065
b_1	0.36	0.58	0.014	0.023
C	0.20	0.38	0.008	0.015
D-14	--	19.94	--	0.785
E	5.59	7.87	0.220	0.310
E_1	7.73	8.26	0.290	0.325
e	2.54 BSC		0.100 BSC	
e_1	7.62 BSC		0.300 BSC	
L	3.81	5.08	0.150	0.200
L_1	3.18	--	0.125	--
L_2	0.38	1.78	0.015	0.070
S	--	2.49	--	0.098
Ø	0°	15°	0°	15°