
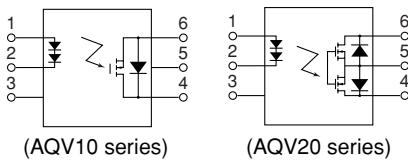


Panasonic
ideas for life

**Low on-resistance.
Controls load voltage
40V to 400V.
DC load type is available.**

**HF PhotoMOS
(AQV10○, 20○)**

FEATURES

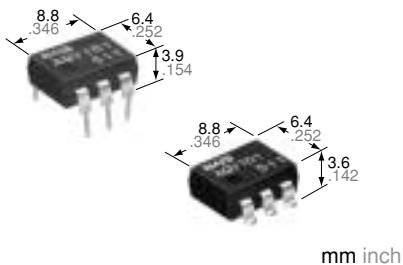

1. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

2. Control with low-level input signals

3. Controls various types of loads such as relays, motors, lamps and solenoids.

4. Optical coupling for extremely high isolation

Unlike mechanical relays, the PhotoMOS relay combines LED and optoelectronic device to transfer signals using light for extremely high isolation.

5. Eliminates the need for a counter electromotive force protection diode in the drive circuits on the input side

6. Stable on resistance

7. Low-level off state leakage current

8. Eliminates the need for a power supply to drive the power MOSFET

A power supply used to drive the power MOSFET is unnecessary because of the built-in optoelectronic device. This results in easy circuit design and small PC board area.

9. Low thermal electromotive force (Approx. 1 μV)

TYPICAL APPLICATIONS

- High-speed inspection machines
- Telephone equipment
- Data communication equipment
- Computer

TYPES

1. DC type (AQV10 types)

Output rating*		Part No.				Packing quantity	
		Through hole terminal	Surface-mount terminal				
Load voltage	Load current	Tube packing style		Tape and reel packing style		Tube	Tape and reel
				Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side		
40 V	700 mA	AQV101	AQV101A	AQV101AX	AQV101AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs
60 V	600 mA	AQV102	AQV102A	AQV102AX	AQV102AZ		
250 V	300 mA	AQV103	AQV103A	AQV103AX	AQV103AZ		
400 V	180 mA	AQV104	AQV104A	AQV104AX	AQV104AZ		

*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

2. AC/DC type (AQV20 types)

Output rating*		Part No.				Packing quantity	
		Through hole terminal	Surface-mount terminal				
Load voltage	Load current	Tube packing style		Tape and reel packing style		Tube	Tape and reel
				Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side		
40 V	500 mA	AQV201	AQV201A	AQV201AX	AQV201AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs
60 V	400 mA	AQV202	AQV202A	AQV202AX	AQV202AZ		
250 V	200 mA	AQV203	AQV203A	AQV203AX	AQV203AZ		
400 V	150 mA	AQV204	AQV204A	AQV204AX	AQV204AZ		

*Indicate the peak AC and DC values.

Note: For space reasons, the SMD terminal shape indicator "A" and the package type indicator "X" and "Z" are omitted from the seal.

HF PhotoMOS (AQV10○, 20○)

RATING

1. DC type (AQV10 types)

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQV101(A)	AQV102(A)	AQV103(A)	AQV104(A)	Remarks
Input	LED forward current	I _F		50 mA			
	LED reverse voltage	V _R		10 V			
	Peak forward current	I _{FP}		1 A			f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}		150 mW			
Output	Load voltage (DC)	V _L	40 V	60 V	250 V	400 V	
	Continuous load current (DC)	I _L	0.7 A	0.6 A	0.3 A	0.18 A	
	Peak load current	I _{peak}	1.8 A	1.5 A	0.6 A	0.5 A	100 ms (1 shot)
	Power dissipation	P _{out}		360 mW			
Total power dissipation		P _T		410 mW			
I/O isolation voltage		V _{iso}		1,500 V (AC)			
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F				Non-condensing at low temperatures
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F				

2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQV101(A)	AQV102(A)	AQV103(A)	AQV104(A)	Condition	
Input	LED operate current	I _{Fon}	2.3 mA				I _L = Max.	
			5 mA					
	LED turn off current	I _{Foff}	0.8 mA				I _L = Max.	
			2.2 mA					
Output	LED dropout voltage	V _F	2.3 V				I _F = 10 mA	
			3 V					
	On resistance	R _{on}	0.3 Ω	0.37 Ω	2.7 Ω	6.3 Ω	I _F = 10 mA I _L = Max. Within 1 s on time	
			0.5 Ω	0.7 Ω	4 Ω	8 Ω		
Transfer characteristics	Off state leakage current	Maximum	—	1 μA			I _F = 0 mA, V _L = Max.	
	Switching speed	T _{on}	0.23 ms	0.22 ms	0.13 ms	0.09 ms	I _F = 10 mA I _L = Max.	
			1 ms					
	I/O capacitance	T _{off}	0.07 ms				I _F = 10 mA I _L = Max.	
			1 ms					
	Initial I/O isolation resistance	Minimum	R _{iso}	1,000 MΩ				
				500 V DC				

Note: Recommendable LED forward current I_F = 10 mA.

*Turn on/Turn off time

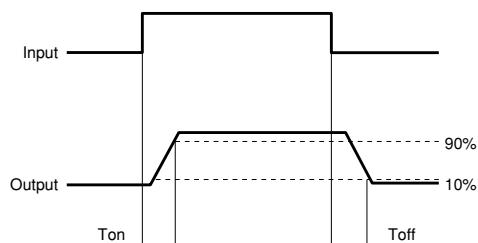

HF PhotMOS (AQV10○, 20○)

2. AC/DC type (AQV20 types)

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV201(A)	AQV202(A)	AQV203(A)	AQV204(A)	Remarks	
Input	LED forward current	I _F		50 mA					
	LED reverse voltage	V _R		10 V					
	Peak forward current	I _{FP}		1 A				f = 100 Hz, Duty factor = 0.1%	
	Power dissipation	P _{in}		150 mW					
Output	Load voltage (peak AC)	V _L		40 V	60 V	250 V	400 V		
	Continuous load current	I _L		A	0.5 A	0.4 A	0.2 A	0.15 A	
				B	0.7 A	0.6 A	0.3 A	0.18 A	
	Peak load current	I _{peak}		C	1.0 A	0.8 A	0.4 A	0.25 A	
Power dissipation		P _{out}		360 mW				A connection 100 ms (1 shot) V _L = DC	
Total power dissipation		P _T		410 mW					
I/O isolation voltage		V _{iso}	1,500 V AC						
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F				Non-condensing at low temperature		
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F						


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV201(A)	AQV202(A)	AQV203(A)	AQV204(A)	Remarks	
Input	LED operate current	Typical	I _{Fon}	2.4 mA				I _L = Max.	
		Maximum		5 mA					
	LED turn off current	Minimum		0.8 mA				I _L = Max.	
		Typical		2.2 mA					
Output	LED dropout voltage	Typical	V _F	2.3 V				I _F = 10 mA	
		Maximum		3 V					
	On resistance	Typical	R _{on}	A	0.6 Ω	0.74 Ω	5.5 Ω	12.4 Ω	I _F = 10 mA I _L = Max. Within 1 s on time
		Maximum		A	1 Ω	1.4 Ω	8 Ω	16 Ω	
		Typical	R _{on}	B	0.3 Ω	0.37 Ω	2.7 Ω	6.2 Ω	I _F = 10 mA I _L = Max. Within 1 s on time
		Maximum		B	0.5 Ω	0.7 Ω	4 Ω	8 Ω	
		Typical	R _{on}	C	0.15 Ω	0.18 Ω	1.4 Ω	3.1 Ω	I _F = 10 mA I _L = Max. Within 1 s on time
		Maximum		C	0.25 Ω	0.35 Ω	2 Ω	4 Ω	
	Off state leakage current	Maximum	—	—	1 μA				I _F = 0 mA, V _L = Max.
Transfer characteristics	Switching speed	Turn on time*	T _{on}	—	0.38 ms	0.41 ms	0.21 ms	0.18 ms	I _F = 10 mA I _L = Max.
		Maximum		—	1 ms				
	Turn off time*	Typical	T _{off}	—	0.08 ms		0.07 ms		I _F = 10 mA I _L = Max.
		Maximum		—	1 ms				
	I/O capacitance		C _{iso}	—	1.3 pF				f = 1 MHz V _B = 0 V
	Initial I/O isolation resistance			—	3 pF				
Initial I/O isolation resistance		Minimum	R _{iso}	—	1,000 MΩ		500 V DC		

f = 10 mA.

Note: Recommendable LED forward current I


*Turn on/turn off time

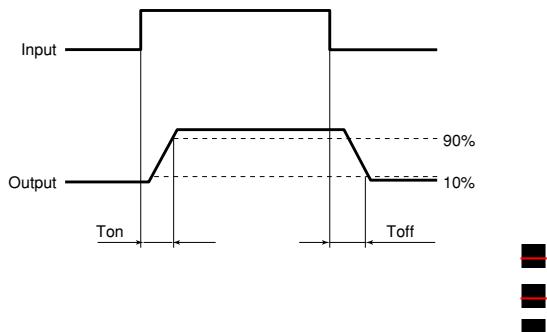

REFERENCE DATA

1.-(1) Load current vs. ambient temperature characteristics (DC type)


Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

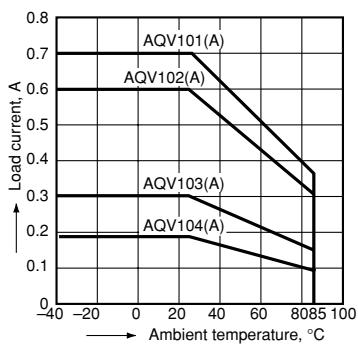

1.-(2) Load current vs. ambient temperature characteristics (AC/DC type)


Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

Type of connection: A

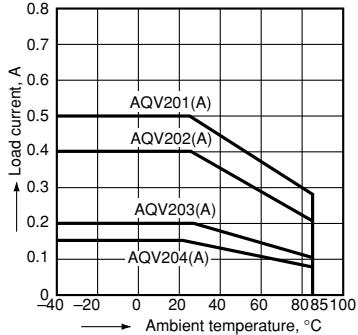


2.-(1) On resistance vs. ambient temperature characteristics (DC type: AQV101, AQV102)

LED current: 10 mA;
Continuous load current: Max. (DC)

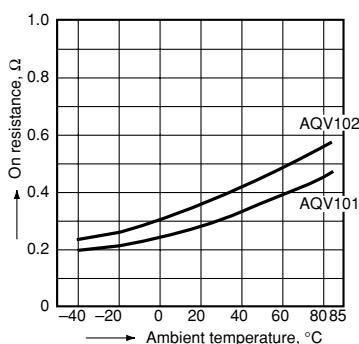


2.-(2) On resistance vs. ambient temperature characteristics (DC type: AQV103, AQV104)

LED current: 10 mA;
Continuous load current: Max. (DC)

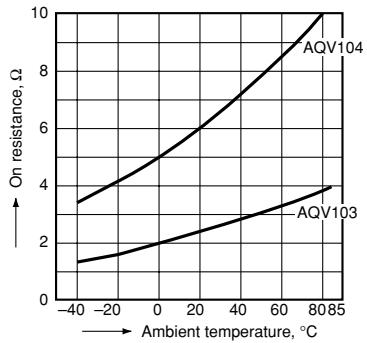


2.-(3) On resistance vs. ambient temperature characteristics (AC/DC type: AQV201, AQV202)

Measured portion: between terminals 4 and 6;
LED current: 10 mA;
Continuous load current: Max. (DC)

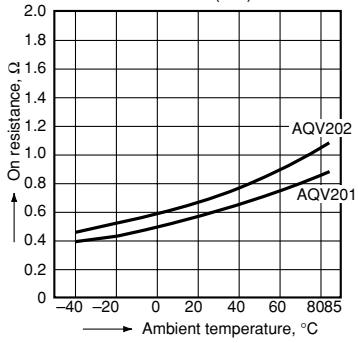


2.-(4) On resistance vs. ambient temperature characteristics (AC/DC type: AQV203, AQV204)

Measured portion: between terminals 4 and 6;
LED current: 10 mA;
Continuous load current: Max. (DC)

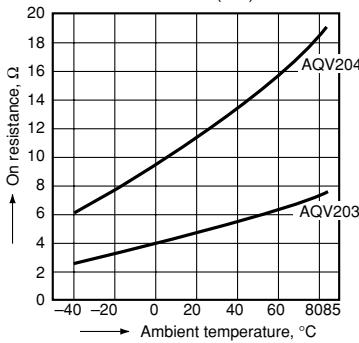


3.-(1) Turn on time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

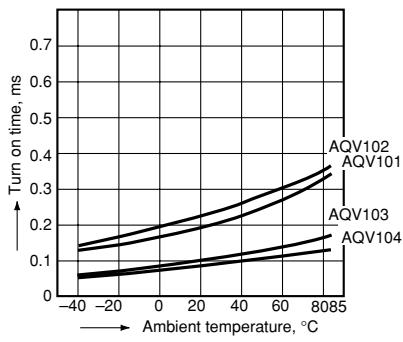


3.-(2) Turn on time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

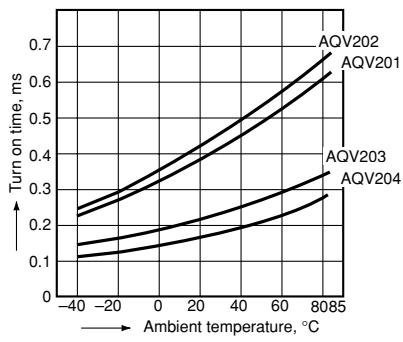


4.-(1) Turn off time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)




5.-(1) LED operate/turn off current vs. ambient temperature characteristics (DC type)

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

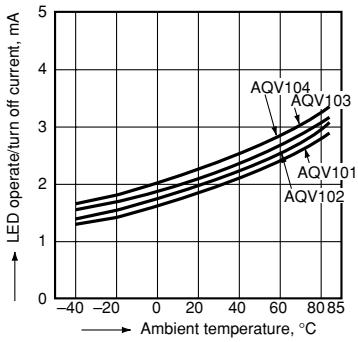

5.-(2) LED operate/turn off current vs. ambient temperature characteristics (AC/DC type)

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

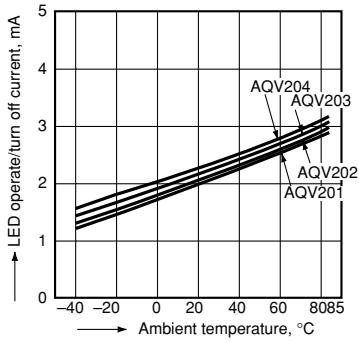


HF PhotMOS (AQV10○, 20○)

6. LED dropout voltage vs. ambient temperature characteristics

Sample: AQV202


LED current: 10 to 50 mA

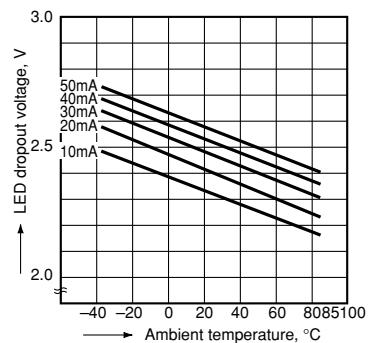

8. Off state leakage current vs. load voltage characteristics

Sample: AQV204;

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

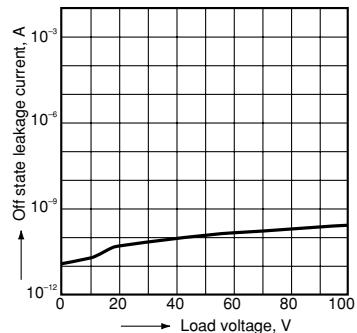


10.-1) Turn off time vs. LED forward current characteristics (DC type)

Load voltage: Max. (DC);

Continuous load current: Max. (DC);

Ambient temperature: 25°C 77°F

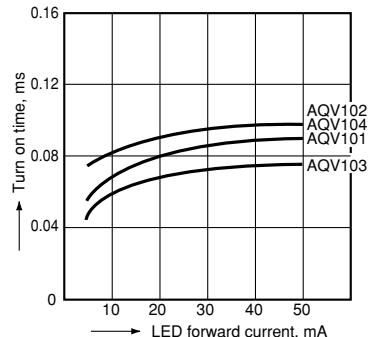


11.-2) Output capacitance vs. applied voltage characteristics (AC/DC type)

Measured portion: between terminals 4 and 6;


Frequency: 1 MHz;

Ambient temperature: 25°C 77°F

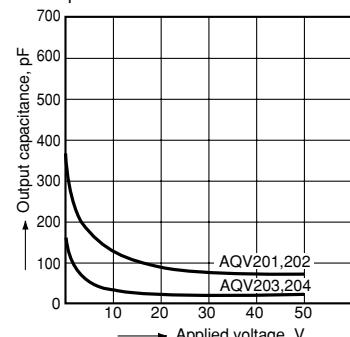

7.-1) Current vs. voltage characteristics of output at MOS portion (DC type)


Ambient temperature: 25°C 77°F



7.-2) Current vs. voltage characteristics of output at MOS portion (AC/DC type)

Measured portion: between terminals 4 and 6;

Ambient temperature: 25°C 77°F




9.-1) Turn on time vs. LED forward current characteristics (DC type)

Load voltage: Max. (DC);

Continuous load current: Max. (DC);

Ambient temperature: 25°C 77°F

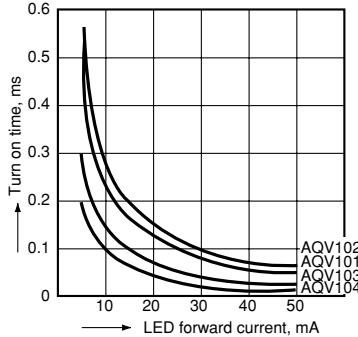


9.-2) Turn on time vs. LED forward current characteristics (AC/DC type)

Measured portion: between terminals 4 and 6;

Load voltage: Max. (DC);

Continuous load current: Max. (DC);

Ambient temperature: 25°C 77°F

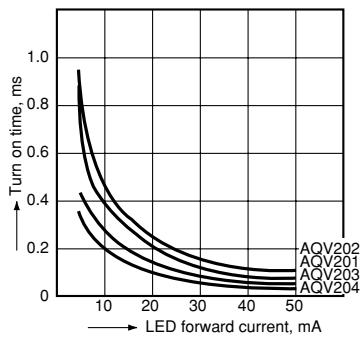


10.-2) Turn off time vs. LED forward current characteristics (AC/DC type)

Measured portion: between terminals 4 and 6;

Load voltage: Max. (DC);

Continuous load current: Max. (DC);

Ambient temperature: 25°C 77°F

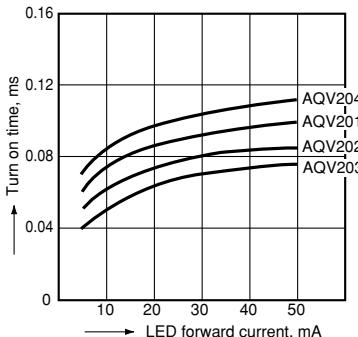

11.-1) Output capacitance vs. applied voltage characteristics (DC type)

Frequency: 1 MHz;

Ambient temperature: 25°C 77°F

