
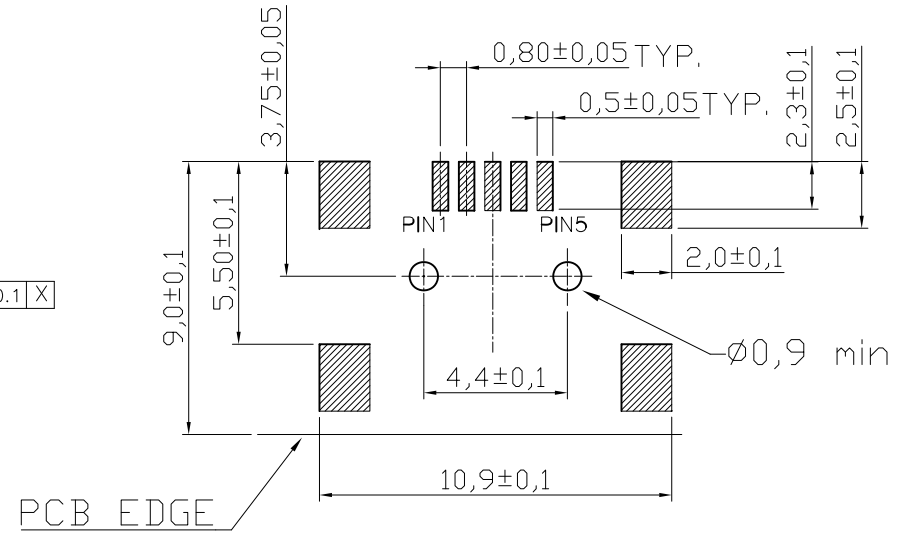
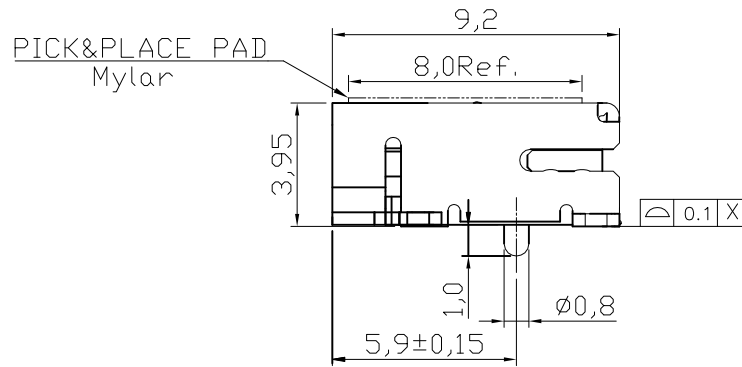
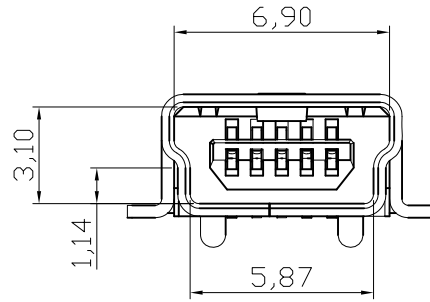


③ USB 2.0 COMPLIANT

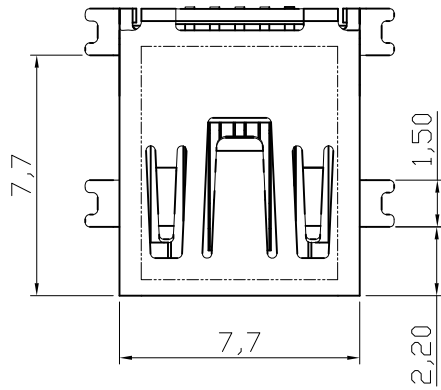

NOTES:

1. Insulation: Glass Filled Polyamide UL94V-0, Color Black
2. Contact : Copper Alloy
3. Plating : Selective 30µ" Gold over 50µ" Nickel
4. Shell Plating: Copper Alloy , 120µ" Tin over 30µ" Nickel
5. Packing: Tape & Reel (with pick&place pad)

RoHS compliant
Unit: mm

Scale	Free						Date	Name	Customer-No.	
TOLERANCE							Drawn	25.03.2006	Alex	ASSMANN WSW-No. A-USB B-M5-SMD-C
.X	±0.20						Approved	19.08.2013	Amy	
.XX	±0.10									
.XXX	±0.05	③	Add "USB 2.0 COMPLIANT"	19.08.2013	Amy					Drawing-No.
DIM	TOL	②	Update	07.07.2009	Dean		ASS 1456D CO		rev03	
X.°	±1°	①	Drawn	25.03.2006	Alex		Replace	SHEET 1/2		
Angle	TOL									
UNIT	mm	Id.	Modification	Date	Name					

1

2

3


4

5

6

7



USB 2.0 COMPLIANT

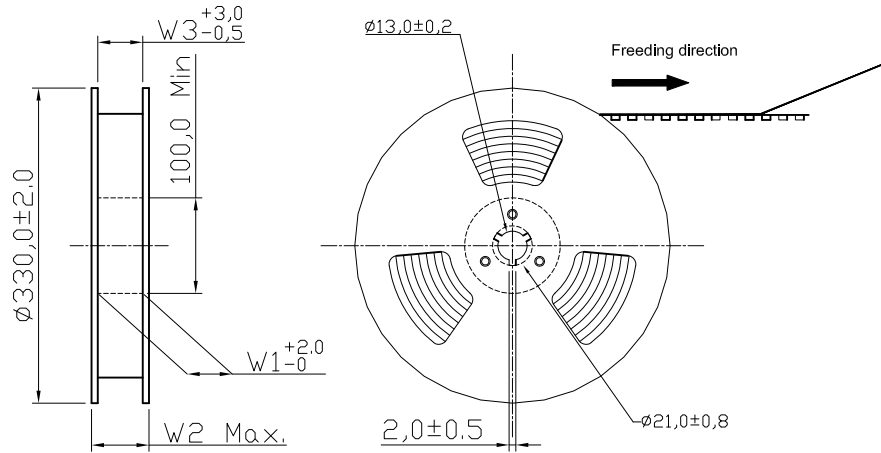


NOTES:

- 1.Reel Material: HIPS
- 2.Carrier Material : Black, Conductive Ploystyrene Alloy
- 3.Cover Tape Material: Polyester
- 4.Cover Tape Peel Strength:0.1N-1.3N
- 5.Carrier camber is within 1 mm in 250 mm
- 6.All dimensions meet EIA-481-B requirements
- 7.Quantity:700 PCS/Reel

Dimensions				Packing (Reel/Caton)
E	W1	W2	W3	
24.0	24.5	30.5	24.5	9

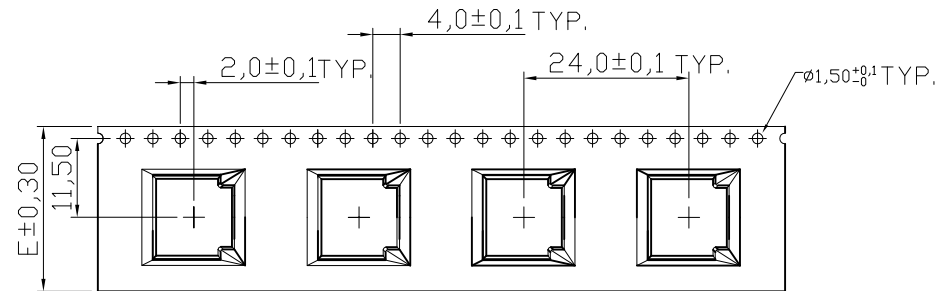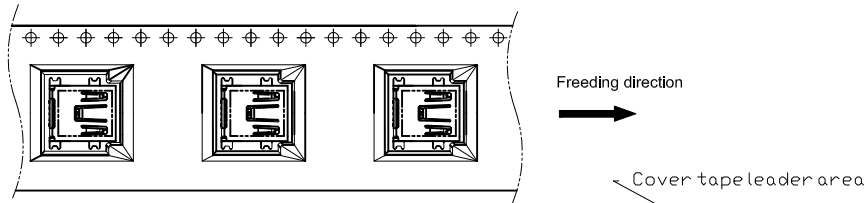

WIDTH: 24 mm Carrier

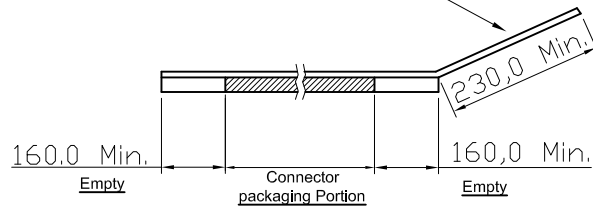

RoHS compliant
Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	25.03.2006	Alex
.X	±X					Approved	19.08.2013	Amy
.XX	±X							ASSMANN WSW-No.
.XXX	±X	③	Add "USB 2.0 COMPLIANT"	19.08.2013	Amy			A-USB B-M5-SMD-C
DIM	TOL	②	Update	07.07.2009	Dean			Drawing-No.
X.°	±1°							ASS 1456D CO
Angle	TOL	①	Drawn	25.03.2006	Alex	Replace		SHEET 2 / 2
UNIT	mm	Id.	Modification	Date	Name			