


A22K

Install in 22-dia. or 25-dia. Panel Cutout

- Lever for easily mounting and removing the Socket Unit.
- Increase wiring efficiency with three-row mounting of Switch Blocks.
- Finger protection mechanism on Switch Unit provided as a standard feature.
- Use 25-dia. ring to install in 25-dia. panel cutouts.
- Mounted using either open-type (fork-type) or closed-type (round-type) crimp terminals.
- IP65 oil resistance

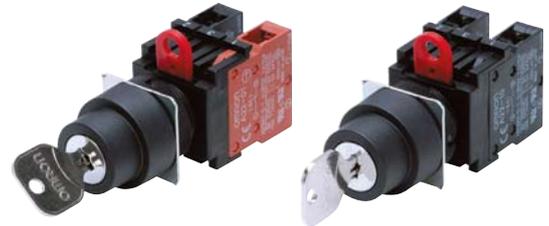

Model Number Structure

Model Number Legend..... Shipped as a set which includes the Selector and Switch.
For information on combinations, refer to Ordering Information.

A 22 K - (1)
2ML - (2)
11

(1) Number of Notches/Reset Method

Code	Notches	Reset method	Key release position
2ML	2 notches	Manual	Left
2M			Left and right
2AL		Automatic	Left
3ML	3 notches	Manual	Left
3M			Left and right
3MC			Center
3AC		Automatic	Center


(2) Contacts

Code	Description
10	SPST-NO *
01	SPST-NC *
11	SPST-NO + SPST-NC
20	SPST-NO + SPST-NO
02	SPST-NC + SPST-NC

- * For models with 2 notches
- Contact Rating is standard load.
 - For microloads, select from the accessories.
 - For special keys, consult your OMRON representative.


Ordering Information

Completely Assembled Shipped as a set which includes the Selector and Switch.
Key-type Selector Switch

Appearance	Number of notches	Reset method	Output	Key release position	Model		
Key-type Selector Switch A22K 	2 notches	Manual	SPST-NO	⊖	A22K-2ML-10		
				⊗	A22K-2M-10		
			SPST-NC	⊖	A22K-2ML-01		
				⊗	A22K-2M-01		
			SPST-NO + SPST-NC	⊖	A22K-2ML-11		
				⊗	A22K-2M-11		
		SPST-NO + SPST-NO	⊖	A22K-2ML-20			
			⊗	A22K-2M-20			
		Automatic			SPST-NO + SPST-NC	⊖	A22K-2ML-02
						⊗	A22K-2M-02
	SPST-NO				⊖	A22K-2AL-10	
					⊗	A22K-2AL-01	
	SPST-NC	⊖	A22K-2AL-11				
		⊗	A22K-2AL-20				
	3 notches	Manual	SPST-NO + SPST-NC	⊖	A22K-3ML-11		
				⊗	A22K-3M-11		
			SPST-NO + SPST-NO	⊖	A22K-3ML-11		
				⊗	A22K-3M-11		
			SPST-NO + SPST-NC	⊖	A22K-3ML-20		
				⊗	A22K-3M-20		
Automatic				SPST-NO + SPST-NC	⊖	A22K-3ML-20	
					⊗	A22K-3M-20	
				SPST-NC + SPST-NC	⊖	A22K-3ML-02	
					⊗	A22K-3M-02	
			SPST-NO + SPST-NC	⊖	A22K-3ML-02		
				⊗	A22K-3M-02		
			SPST-NO + SPST-NO	⊖	A22K-3AC-11		
				⊗	A22K-3AC-20		
SPST-NC + SPST-NC	⊖	A22K-3AC-11					
	⊗	A22K-3AC-20					

Note: 1. Two Keys are provided.
 2. The contact ratings are for standard loads.

Subassembled The Selector, Lamp, or Switch can be ordered separately. Use them in combination for models that are not available as assembled Units. These can also be used as inventory for maintenance parts.

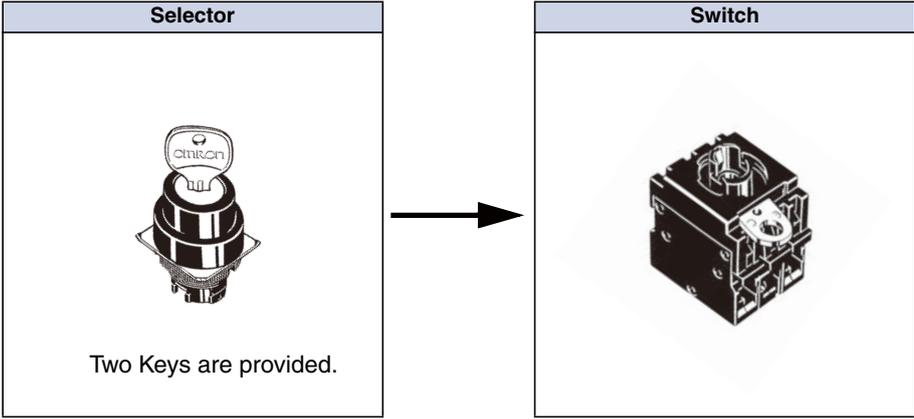

Ordering Information

Subassembled The Selector, Lamp, or Switch can be ordered separately. Use them in combination for models that are not available as assembled Units. These can also be used as inventory for maintenance parts.

Selector

Oil-resistant IP65 (Color: Only Black is available)

Appearance	Number of notches	Reset method	Key release position	Model
	2 notches	Manual		 A22K-2ML
				 A22K-2M
	3 notches	Automatic		 A22K-2AL
				 A22K-3ML
				 A22K-3M
		Automatic		 A22K-3MC
				 A22K-3AC
				 A22K-3AMR
				 A22K-3MAL

Note: Two keys are provided.

Switch (Standard Load)

Appearance	Classification	Model
	SPST-NO	A22-10M
	SPST-NC	A22-01M
	SPST-NO + SPST-NC	A22-11M
	SPST-NO + SPST-NO	A22-20M
	SPST-NC + SPST-NC	A22-02M

Accessories



Appearance	Model
	A22K-K

Note: Two keys are provided.

Dimensions


Key-type Selector Switch

Key-type Selector Switch A22K

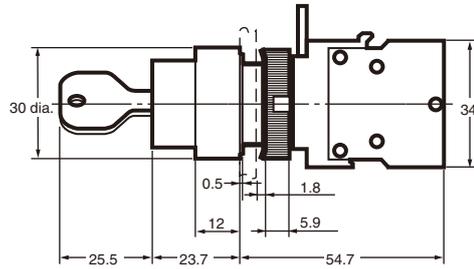


Terminal Arrangement (Bottom View)

Non-lighted



Panel Cutouts



Lock fitting is provided as a standard item.

- When applying coating such as paint to the panel, the dimensions should be those after the application of coating.
- Recommended panel thickness: 1 to 5 mm.
- Use an A22Z-R25 Ring when mounting to a panel with 25-mm holes.

Terminal Connection

Type	Terminal connection
Non-lighted	<p>Bottom view</p>

Note: The above terminal connection diagrams are examples for SPST-NO + SPST-NC.