

<Low pressure type>

Compliance with RoHS Directive

FEATURES

1. Contains built-in amplification and temperature compensation circuit.

Circuit design and adjustment of characteristics are not required by users.

2. High-level precision and high reliability realized.

- Overall accuracy is $\pm 1.25\%$ FS (Standard type)

- Overall accuracy is $\pm 4\%$ FS (Economy type)

- Overall accuracy is $\pm 2.5\%$ FS (Low pressure type)

3. Compact pressure sensor unit that saves space.

Same size and as previous PS pressure sensor.

- Footprint 7.0 mm (W) x 7.2 mm (D)

- 10.4 mm (W) x 10.4 mm (D) (Low pressure type)

TYPICAL APPLICATIONS

(Please evaluate under actual conditions before using.)

- Industrial use (pressure switches and pneumatic devices, etc.)

- Medical use (blood pressure monitors, oxygen concentrators, air beds, etc.)

- Other pneumatically operated pressure devices

Low pressure type

1. Water level detection for household appliances

Washing machines and dishwashers.

2. Air pressure control

Clean rooms and separate rooms for smokers.

3. Medical applications

Respiratory equipment monitoring, etc.

ORDERING INFORMATION

ADP5	1			
------	---	--	--	--

<Terminal profile>
1: DIP terminal





<Rated pressure>
0: ± 100 kPa
1: -100 kPa
2: 25 kPa
3: 50 kPa
4: 100 kPa
5: 200 kPa
6: 500 kPa
7: 1,000 kPa
A: 40 kPa
B6: 6 kPa (Low pressure type)

<Pressure inlet hole>
0: length 3 mm, diameter 3 mm
1: length 5 mm, diameter 3 mm
2: length 13.5 mm, diameter 5.45 mm

<Type>
Nil: Standard type (with glass base)
1: Economy type (without glass base)

Note: Some part numbers may not be available depending on the combination.
Please refer to the Table of Product Types on the next page.

PRODUCT TYPES

Pressure inlet hole length		Part No.			
		3mm	5mm	Low pressure type	
				5mm	13.5mm
Pressure	Terminal	DIP terminal 	DIP terminal 	DIP terminal 	DIP terminal 
Standard type (with glass base)	±100kPa	ADP5100	ADP5101	—	—
	−100kPa	ADP5110	ADP5111	—	—
	25kPa	ADP5120	ADP5121	—	—
	50kPa	ADP5130	ADP5131	—	—
	100kPa	ADP5140	ADP5141	—	—
	200kPa	ADP5150	ADP5151	—	—
	500kPa	ADP5160	ADP5161	—	—
	1,000kPa	ADP5170	ADP5171	—	—
Economy type (without glass base)	40kPa	—	ADP51A11	—	—
Low pressure type	6kPa	—	—	ADP51B61	ADP51B62

Standard packing: Carton: 100 pcs.; Case: 1,000 pcs.

RATING

1. Standard type

Item		Standard type (with glass base)								Remarks	
Type of pressure		Gauge pressure									
Pressure medium		Air								Note*1	
Rated pressure	Unit: kPa	±100	−100	25	50	100	200	500	1,000		
Max. applied pressure		Twice the rated pressure								1.5 times the rated pressure	
Drive voltage		5±0.25V DC									
Temperature compensation range		0 to 50°C 32 to 122°F									
Offset voltage		2.5±0.05	0.5±0.05V								Note*2
Rated output voltage		4.5±0.05 (when +100kPa)	4.5±0.05V								Note*2
Overall accuracy		±1.25%FS								Note*2 Note*3	
Current consumption		Max. 10mA									
Output impedance		Approx. 50Ω									
Source current		Max. 0.2mA									
Sink current		Max. 2mA									

Notes: 1. Please consult us for pressure media other than air.

2. Indicates output when drive voltage is 5 V. Although output fluctuates due to fluctuations in the drive voltage, this is not included.

3. Overall accuracy indicates the accuracy of the offset voltage and rated output voltage at temperatures between 0 to 50°C 32 to 122°F (Low pressure type: 0 to 70°C 32 to 158°F). (FS=4V)

4. Overall accuracy indicates accuracy after adjusting auto offset to zero.

2. Economy type

Item		Economy type (without glass base)							Remarks
Type of pressure		Gauge pressure							
Pressure medium		Air							Note*1
Rated pressure	Unit: kPa	40							
Max. applied pressure		Twice the rated pressure							
Drive voltage		3±0.15V DC							
Temperature compensation range		5 to 45°C 41 to 113°F							
Offset voltage		0.3±0.09V							Note*2
Span voltage		2.4±0.03V							Note*2
Overall accuracy		±4%FS							Note*2 Note*3
Current consumption		Max. 3mA							
Output impedance		20Ω (typ.)							
Source current		Max. 0.15mA							
Sink current		Max. 1.5mA							

Notes: 1. Please consult us for pressure media other than air.

2. Indicates output when drive voltage is 3 V. Although output fluctuates due to fluctuations in the drive voltage, this is not included.

3. Overall accuracy indicates the accuracy of the offset voltage and rated output voltage at temperatures between 5 to 45°C 41 to 113°F (Low pressure type: 0 to 70°C 32 to 158°F). (FS=4V)

PS-A (ADP5)

3. Low pressure type


Item		Low pressure type	Remarks
Type of pressure		Gauge pressure	
Pressure medium		Air	Note*1
Rated pressure	Unit: kPa	6	
Max. applied pressure		Twice the rated pressure	
Drive voltage		5±0.25V DC	
Temperature compensation range		0 to 70°C 32 to 158°F	
Offset voltage		0.5V	Note*2
Span voltage		4.0V	Note*2
Overall accuracy		±2.5%FS	Notes*2, *3 and *4
Current consumption		Max. 10mA	
Output impedance		Approx. 50Ω	
Source current		Max. 0.2mA	
Sink current		Max. 2.0mA	

Notes: 1. Please consult us for pressure media other than air.

2. Indicates output when drive voltage is 5 V. Although output fluctuates due to fluctuations in the drive voltage, this is not included.

3. Overall accuracy indicates the accuracy of the offset voltage and span voltage at temperatures between 0 to 70°C 32 to 158°F (FS=4V)

4. Overall accuracy indicates accuracy after adjusting auto offset to zero.

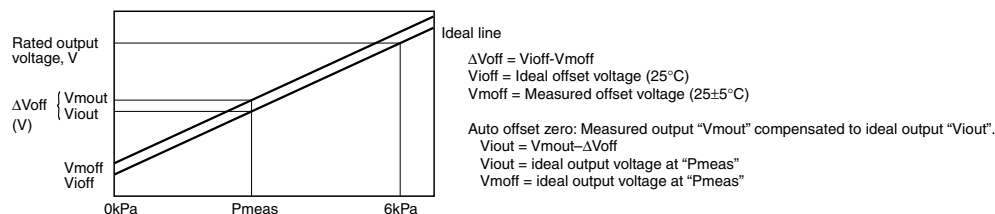

5. Where no particular temperature is indicated, the specification is for use at 25°C 77°F.

REFERENCE DATA

1. Standard and Economy types


1.-(1) Output voltage

ADP5170

Drive voltage: 5V DC

Temperature: 25°C 77°F

Applied pressure: 0 to +1,000kPa




1.-(2) Overall accuracy (Offset voltage)

ADP5170

Drive voltage: 5V DC

Temperature: 0 to 50°C 32 to 122°F

Applied pressure: 0kPa

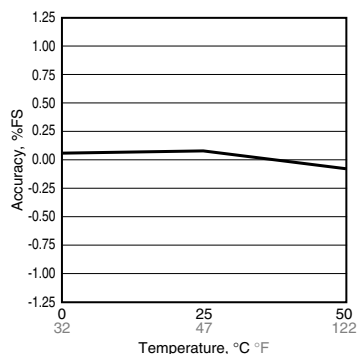


1.-(3) Overall accuracy (Rated output voltage)

ADP5170

Drive voltage: 5V DC

Temperature: 0 to 50°C 32 to 122°F

Applied pressure: +1,000kPa

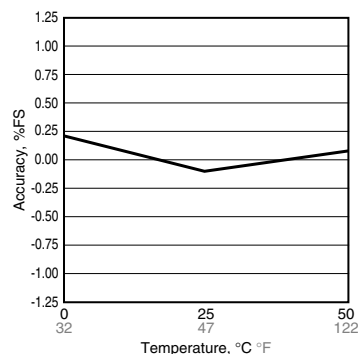


2.-(1) Output voltage

ADP5100

Drive voltage: 5V DC

Temperature: 25°C 77°F

Applied pressure: -100 to +100kPa




2.-(2) Overall accuracy (Offset voltage)

ADP5100

Drive voltage: 5V DC

Temperature: 0 to 50°C 32 to 122°F

Applied pressure: 0kPa

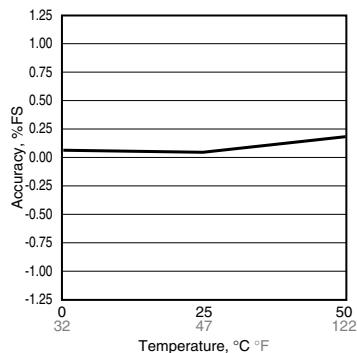


2.-(3) Overall accuracy (Rated output voltage)

ADP5100

Drive voltage: 5V DC

Temperature: 0 to 50°C 32 to 122°F

Applied pressure: +100kPa

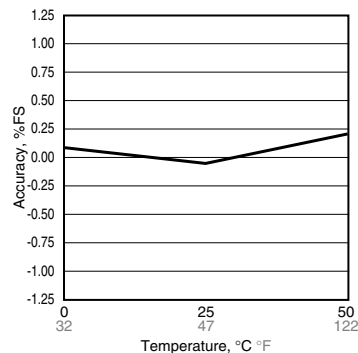


2. Low pressure type**1. Output voltage**

ADP51B61

Drive voltage: 5V

Temperature: 25°C 77°F

Applied pressure: 0 to 6kPa


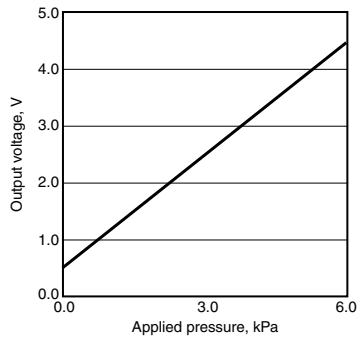
**2. THB (high temperature high humidity bias test)**

ADP51B61



Within 85°C 185°F and 85% RH

5 V applied between No. 2 (Vdd) and No. 3 (GND)

Applied pressure: 0kPa

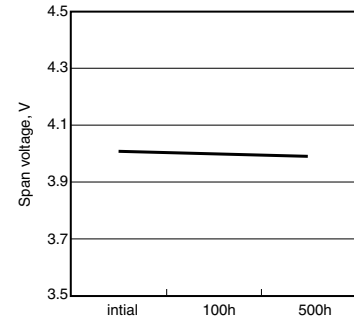**3. Ambient temperature characteristics**

Ambient temperature: 25°C 77°F → 0°C 32°F → 10°C 50°F → 60°C 140°F → 70°C 158°F

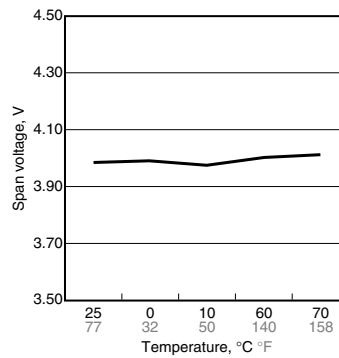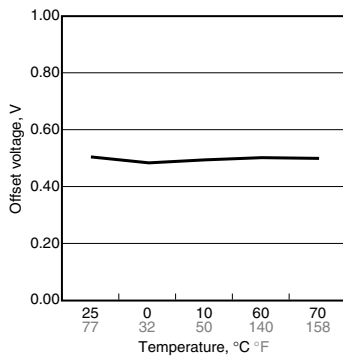
**4. Shock test**

ADP51B61

Shock applied:

981 m/s² 3 times in x, y and z directions




Applied pressure: 0kPa

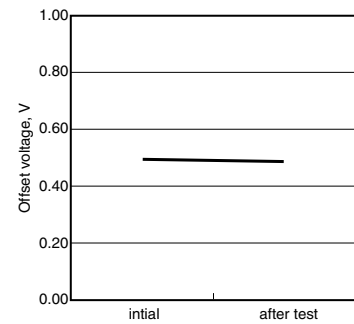**5. Vibration test**

ADP51B61

Vibration applied: 10 to 55 Hz, amplitude: 1.5mm, x, y and z directions, 2 hrs each




Applied pressure: 0kPa

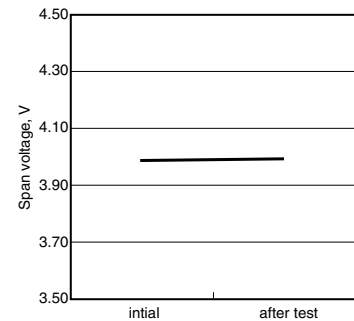**6. Temperature/humidity cycle test**

ADP51B61

Exposed to 10 cycles in the temperature and humidity conditions given below.

Applied pressure: 0kPa

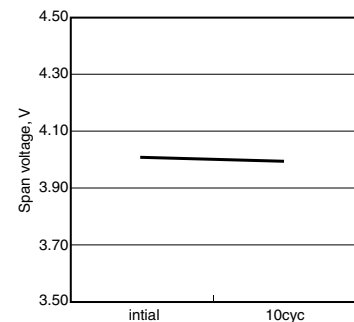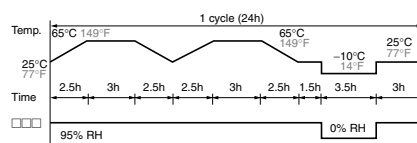

PS-A (ADP5)

3. Evaluation test

Classification	Tested item	Tested condition	Result
Environmental characteristics	Storage at high temperature	Temperature: Left in a 85°C 185°F constant temperature bath; Time: 100 hrs.	Passed
	Storage at low temperature	Temperature: Left in a -20°C -4°F constant temperature bath; Time: 100 hrs.	Passed
	Humidity resistance	Temperature/humidity: Left at 40°C 104°F, 90% RH; Time: 100 hrs.	Passed
	Temperature cycle	Temperature: -20°C to 85°C -4°F to 185°F; 1 cycle: 30 min.; Times of cycle: 100	Passed
Endurance characteristics	High temperature/high humidity operation	Temperature/humidity: 40°C 104°F, 90% RH; Operation times: 10 ⁶ , rated voltage applied	Passed
Mechanical characteristics	Vibration resistance	Double amplitude: 1.5 mm .059 inch; Vibration: 10 to 55 Hz; Applied vibration direction: X, Y, Z 3 directions; Times: 2 hrs each	Passed
	Dropping resistance	Dropping height: 75 cm 29.528 inch; Times: 2 times	Passed
	Terminal strength	Pulling strength: 9.8 N {1 kgf}, 10 sec.; Bending strength: 4.9 N {0.5 kgf}, left and right 90° 1 time	Passed
Soldering resistance	Soldered in DIP soldering bath	Temperature: 230°C 446°F; Time: 5 sec.	Passed
	Temperature (DIP)	Temperature: 260°C 500°F; Time: 10 sec.	Passed


DIMENSIONS (mm inch)

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://panasonic-electric-works.net/ac>


1. DIP terminal (Pressure inlet hole: 3mm) ADP51*0

General tolerance: ±0.3 ±.012


CAD Data

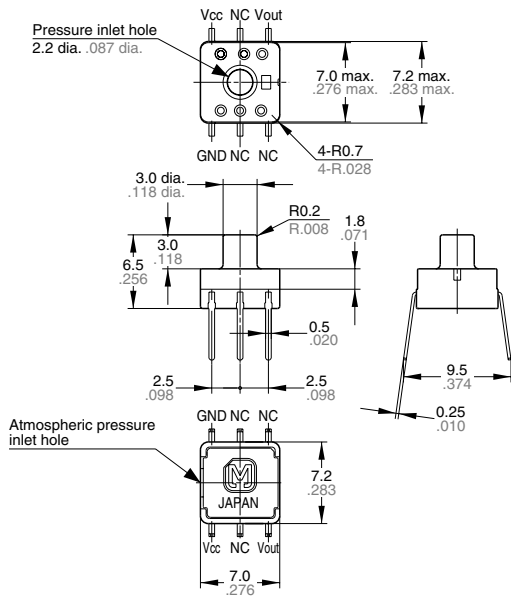

Recommended PC board pattern (TOP VIEW 2:1)




Terminal connection diagram




Terminal No.	Name
1	Vcc (Power supply [+])
2	NC (No connection)
3	Vout (Output)
4	NC (No connection)
5	NC (No connection)
6	GND (Ground)

2. DIP terminal (Pressure inlet hole: 5mm) ADP51*1/ADP51A11


CAD Data

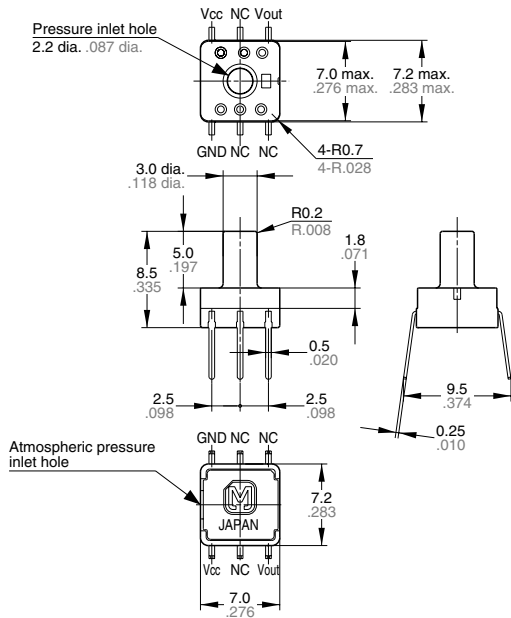

Recommended PC board pattern (TOP VIEW 2:1)



Terminal connection diagram




Terminal No.	Name
1	Vcc (Power supply [+])
2	NC (No connection)
3	Vout (Output)
4	NC (No connection)
5	NC (No connection)
6	GND (Ground)


3. Low pressure type (Pressure inlet hole length: 5mm) ADP51B61

General tolerance: $\pm 0.3 \pm 0.12$


CAD Data

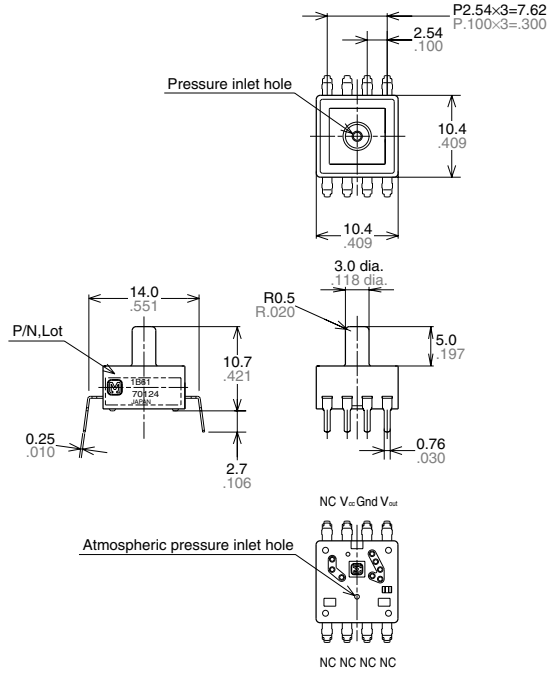

Recommended PC board pattern




Terminal connection diagram




Terminal No.	Name
1	NC (No connection)
2	V _{cc} (Power supply [+])
3	GND (Ground)
4	V _{out} (Output)
5	NC (No connection)
6	NC (No connection)
7	NC (No connection)
8	NC (No connection)

4. Low pressure type (Pressure inlet hole length: 13.5mm) ADP51B62


CAD Data

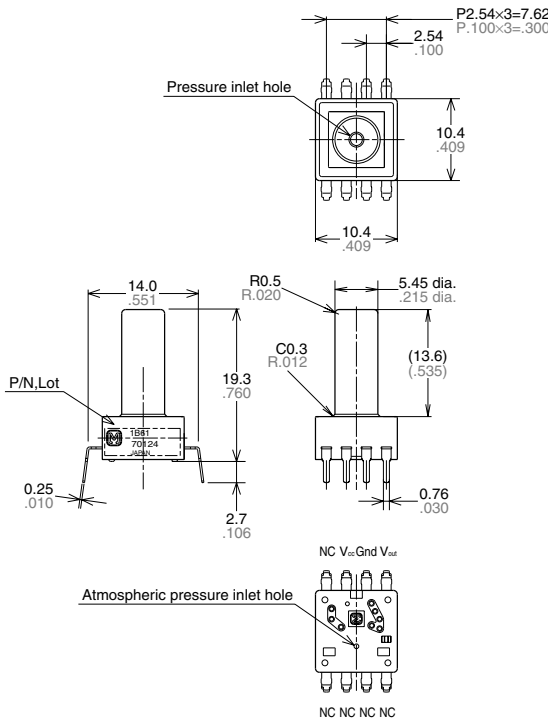

Recommended PC board pattern



Terminal connection diagram



Terminal No.	Name
1	NC (No connection)
2	V _{cc} (Power supply [+])
3	GND (Ground)
4	V _{out} (Output)
5	NC (No connection)
6	NC (No connection)
7	NC (No connection)
8	NC (No connection)

NOTES

1. Mounting

Use lands on the printed-circuit boards to which the sensor can be securely fixed.

2. Soldering

Due to its small size, the thermal capacity of the pressure sensor DIP type is low. Therefore, take steps to minimize the effects of external heat.

Damage and changes to characteristics may occur due to heat deformation.

Use a non-corrosive resin type of flux.

Since the pressure sensor DIP type is exposed to the atmosphere, do not allow flux to enter inside.

1) Manual soldering

- Set the soldering tip from 260 to 300°C 500 to 572°F (30W), and solder for no more than 5 seconds.

- Please note that output may change if the pressure is applied on the terminals when the soldering.

- Thoroughly clean the soldering iron.

2) DIP soldering (DIP terminal type)

- Please keep the DIP solder bath temperature no higher than 260°C 500°F. When soldering, heat should be applied no longer than five seconds.

- When mounting onto a PCB of low thermal capacity, please avoid DIP soldering as this may cause heat deformity.

3) Solder reworking

- Finish reworking in one operation.

- For reworking of the solder bridge, use a soldering iron with a flat tip. Please do not add more flux when reworking.

- Please use a soldering iron that is below the temperature given in the specifications in order to maintain the correct temperature at the tip of the soldering iron.

4) Too much force on the terminals will cause deformation and loss in effectiveness of the solder. Therefore, please avoid dropping and careless handling of the product.

5) Please control warping of the PCB within 0.05 mm of the sensor width.

6) When cut folding the PCB after mounting the sensor, take measures to prevent stress to the soldered parts.

7) The sensor terminals are designed to be exposed, so contact of the terminals with metal shards and the like will cause output errors. Therefore, please be careful and prevent things such as metal shards and hands from contacting the terminals.

8) To prevent degradation of the PCB insulation after soldering, please be careful not to get chemicals on the sensor when coating.

9) Please consult us regarding the use of lead-free solder.

3. Connections

1) Please perform connections correctly in accordance with the terminal connection diagram. In particular, be careful not to reverse wire the power supply as this will cause damage or degrade to the product.

2) Do not connect terminals that are not used. This can cause malfunction of the sensor.

4. Cleaning

1) Since the pressure sensor chip is exposed to the atmosphere, do not allow cleaning fluid to enter inside.

2) Avoid ultrasonic cleaning since this may cause breaks or disconnections in the wiring.

5. Environment

1) Please avoid using or storing the pressure sensor chip in a place exposed to corrosive gases (such as the gases given off by organic solvents, sulfurous acid gas, hydrogen sulfides, etc.) which will adversely affect the performance of the pressure sensor chip.

2) To ensure resistance to power supply superimposed noise, you must provide a capacitor at the power supply input terminal of the sensor in order to stabilize the power supply voltage. We recommend to provide 0.1 μ F and 1,000 pF capacitor in parallel. Please confirm the noise resistance with the actual equipment and choose adequate capacitor.

3) Since the internal circuitry may be destroyed if an external surge voltages is supplied, provide an element which will absorb the surges.

4) Malfunctioning may occur if the product is in the vicinity of electrical noise such as that from static electricity, lightning, a broadcasting station, an amateur radio, or a mobile phone.

5) Since this pressure sensor chip does not have a water-proof construction, please do not use the sensor in a location where it may be sprayed with water, etc.

6) Avoid using the pressure sensors chip in an environment where condensation may form.

Furthermore, its output may fluctuate if any moisture adhering to it freezes.

7) The pressure sensor chip is constructed in such a way that its output will fluctuate when it is exposed to light. Especially when pressure is to be applied by means of a transparent tube, take steps to prevent the pressure sensor chip from being exposed to light.

8) Avoid using the pressure sensor chip where it will be susceptible to ultrasonic or other high-frequency vibration.

6. Quality check under actual loading conditions

To assure reliability, check the sensor under actual loading conditions. Avoid any situation that may adversely affect its performance.

7. Other handling precautions

1) That using the wrong pressure range or mounting method may result in accidents.

2) The only direct pressure medium you can use is dry air. The use of other media, in particular, corrosive gases (organic solvent based gases, sulfurous acid based gases, and hydrogen sulfide based gases, etc.) and media that contains moisture or foreign substances will cause malfunction and damage. Please do not use them.

3) The pressure sensor chip is positioned inside the pressure inlet. Never poke wires or other foreign matter through the pressure inlet since they may damage the chip or block the inlet. Avoid use when the atmospheric pressure inlet is blocked.

4) Use an operating pressure which is within the rated pressure range. Using a pressure beyond this range may cause damage.

5) Since static charge can damage the pressure sensor chip, bear in mind the following handling precautions.

(1) When storing the pressure sensor chips, use a conductive material to short the pins or wrap the entire chip in aluminum foil. Plastic containers should not be used to store or transport the chips since they readily become charged.

(2) When using the pressure sensor chips, all the charged articles on the bench surface and the work personnel should be grounded so that any ambient static will be safely discharged.

6) Based on the pressure involved, give due consideration to the securing of the pressure sensor DIP type and to the securing and selection of the inlet tube. Consult us if you have any queries.