













9 Contacts



15 Contacts



25 Contacts

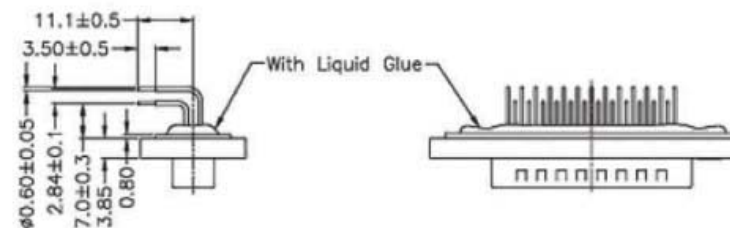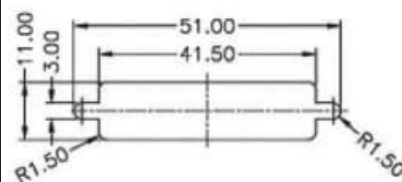

Notes:

- Waterproof Rate: IP67
- Connector: Black, Nylon+GF
- Pin: Copper Alloy, Gold Plated
- Applicable Wire Range: 22AWG - 26AWG
- Insulators: PBT
- Current rating: 5A
- Dielectric voltage: 500V AC / 1 minute
- Insulation resistance: >500MΩ min
- Operating temperature: -40°C to +105°C

	Dimensions			
No. of contacts	A	B	C	D
09	39.4	25.00	16.33	16.92
15	47.8	33.50	24.66	25.25
25	64.5	47.04	38.78	38.96

Scale	1:1						Name	Item No. A-DS09LL-WP-R (Male) A-DF09LL-WP-R (Female) A-DS15LL-WP-R (Male) A-DF15LLWP-R (Female) A-DS25LL-WP-R (Male) A-DF25LL-WP-R (Female)		
TOLERANCE					Drawn	11.22.11	Chappell			
X.X	±0.40									
X.XX	±0.25				Approved			Title Waterproof D-Sub Connector, Angled for PCB Assembly		
X.XXX	±0.15									
Angle	±3°									
								Drawing No.	rev00	
			Modification	Date	Name				Replace	Sheet

