


◀ 35X35X08mm Series ▶



Spot cooling, also suitable for small space requirements, laptops PC and notebook, etc.,.

External Dimensions

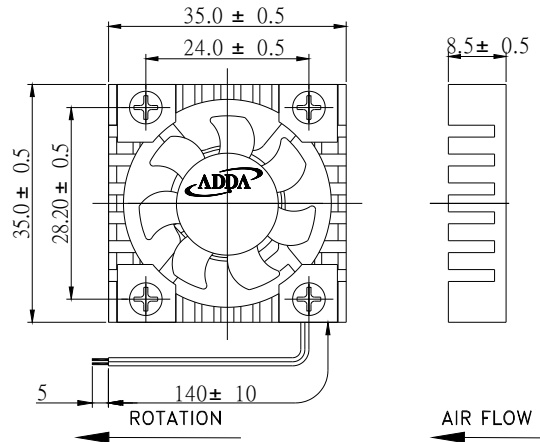

Frame: Plastic (UL:94v-0)
Impeller: Plastic (UL:94v-0)
Bearing: Hypro bearing
Lead wire: UL1571AWG28
OPERATING TEMP*: -10C~70C
VOLTAGE AVAILABLE: 5V, 12V
*: -10C~60C for fans with sleeve/ball combination bearings.

Specifications (Nominal)

*: Noise is measured at the distance of one (1) meter from the axis of intake.







Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve =1B1S =Hypro bearing				Weight (g)	
							Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)		Noise Level (dB/A)
35x35x08	AP3505LX-J70		5	0.09	0.450	7500	0.071	2.50	0.082	2.05	20.0	6
	AP3505MX-J70		5	0.12	0.600	9000	0.093	3.30	0.138	3.45	27.9	
	AP3505HX-J70		5	0.18	0.900	10500	0.116	4.10	0.151	3.78	32.0	
	AP3505MX-J73		5	0.10	0.500	9000	0.093	3.30	0.138	3.45	27.9	
	AP3505HX-J73		5	0.12	0.600	10500	0.116	4.10	0.151	3.78	32.0	
	AP3512LX-J70		12	0.06	0.720	7500	0.071	2.50	0.082	2.05	20.0	
	AP3512MX-J70		12	0.10	0.520	9000	0.093	3.30	0.138	3.45	27.9	
	AP3512HX-J70		12	0.08	0.960	10500	0.116	4.10	0.151	3.78	32.0	

Specifications subject to change without notice.

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓			✓							

*Safety approvals

					
				✓	

