REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
A		ADD PART NUMBER	SY 06/12/18	
B		DRAWING MODIFY	SY 06/10/13	



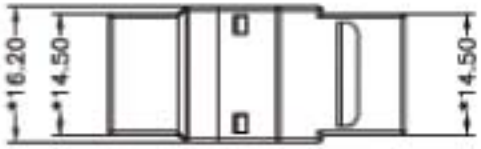



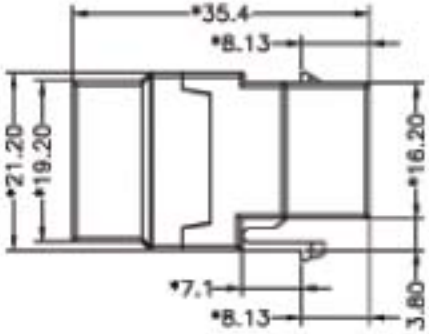





MECHANICAL:
1. HOUSING MATERIAL:PC UL94V-0
2. INSERT MATERIAL: PBT+20%GF UL94V-0
3. PCB MATERIAL:FR-4 THINKNESS:1.6mm
4. CONTACT MATERIAL: PHOSPHOR BRONZE STAMP PIN T=0.35mm
5. ROHS COMPLIANT

NOTES:

ELECTRICAL:

1. VOLTAGE RATING	: 125 VAC RMS.
2. CURRENT RATING	: 1.5 AMP.
3. CONTACT RESISTANCE	: 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE	: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH	: 750 VAC RMS 60Hz, 1MIN.

ENVIRONMENTAL:

1. STORAGE	: -40°C TO +85°C.
2. OPERATION	: 0°C TO 70°C.

CONFORM TO TIA/EIA 568 B.2-1
MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

UNITS: MM	APPR. MGR.	DATE 8/8/2005
TOLERANCES EXCEPT AS NOTED	CHKDBY	DATE 2005/10/11
	MFG	DATE
	APPR./PCBA	DATE 2005/10/11
MATERIAL :		
QT'Y :		
FINISH :		
SCALE : 1:1		

THIRD ANGLE PROJECTION

ASSMANN Electronics

TITLE
A-TA3535-R (CAT6)

DRAWING NO. /PART NO. SEE NOTE

SIZE A3 REV 2

DO NOT SCALE DRAWING

SHEET X OF Y