

MICRO SWITCH

FREEDPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL


FED. MFG. CODE 91000

SWITCH-BASIC


CATALOG LISTING
BZ-2RW89999-A2

APY7780

MOLDED NUT WITH SELF
LOCKING 6-32 UNC THREAD
X .250 LONG ADJUSTING
SCREW WITH .062
HEX SOCKET

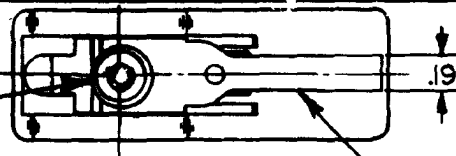

CORROSION RESISTANT
STEEL LEVER

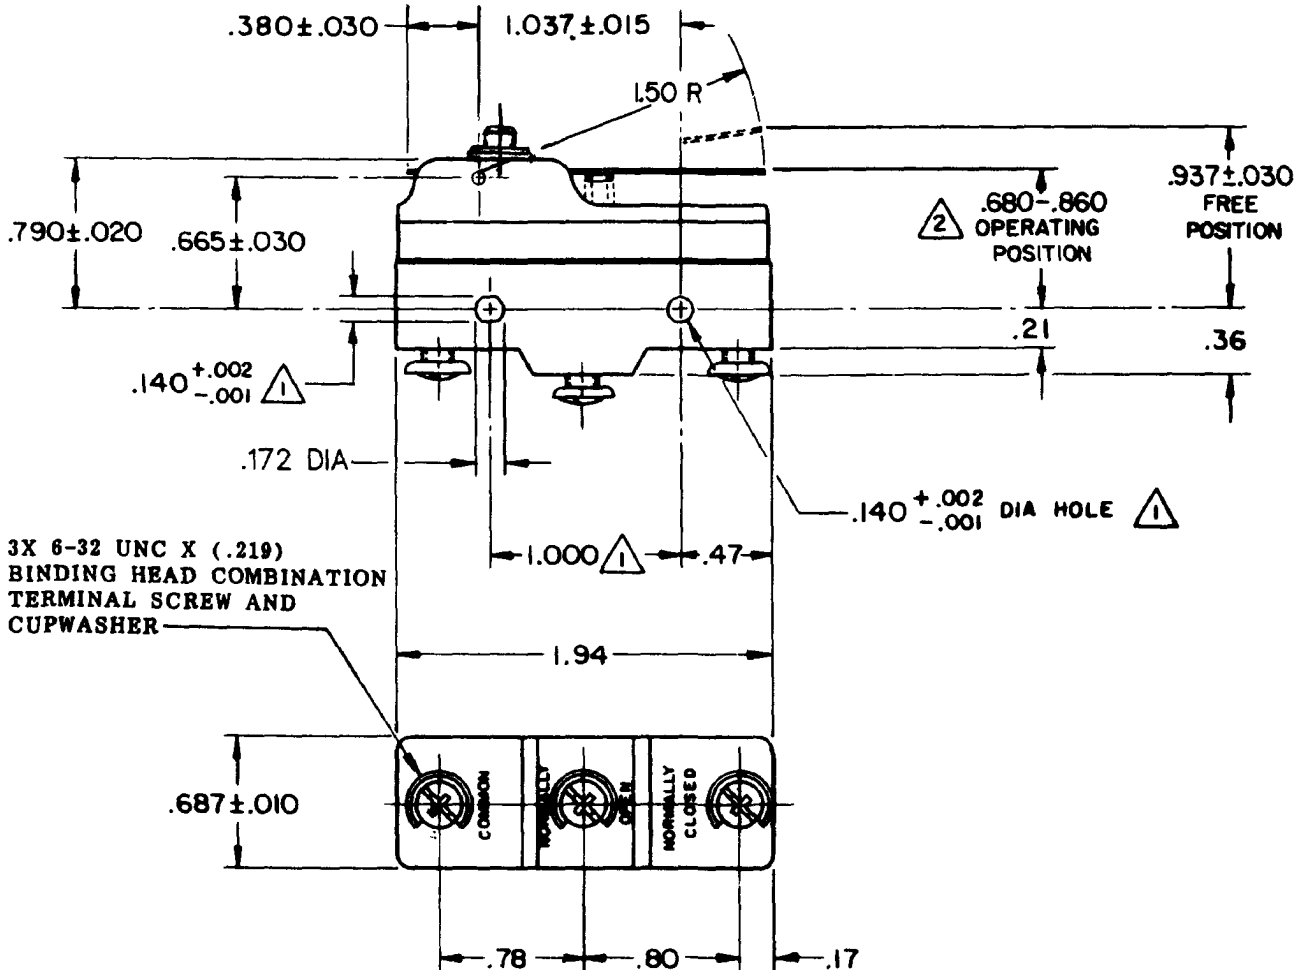

NOTE

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 ADJUSTING SCREW PERMITS ADJUSTMENT OF OPERATING POSITION THROUGH RANGE INDICATED
- 3 DO NOT OVERTRAVEL MORE THAN .210 FROM ANY OPERATING POSITION TO PROVIDE OPTIMUM MECHANICAL LIFE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 5 OZ MAX
RELEASE FORCE ----- 3/4 OZ MIN
DIFFERENTIAL TRAVEL ----- .004-.030
OVERTRAVEL - (3) ----- .075 MIN FROM
.680 OPERATING POSITION

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T
-L96- 15 A - 125, 250, OR 480 VAC
1/2 A - 125 VDC; 1/4 A - 250 VDC
1/8 HP - 125 VAC; 1/4 HP - 250 VAC

-L288-
-L315-
-L306-
CE ENEC 05 SP RU

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT
UNLESS OTHERWISE
NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE
ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±
WEIGHT

CATALOG LISTING
BZ-2RW89999-A2
PAGE 1 OF 1

M

ISSUE
12

REVISIONS

A	202244
C.S.L.	
26 JAN 01	
B	0017579
KRB	
08 DEC 05	

RASTER

FO-52848

DRAWN

REPLACES

RELEASE NO. PR-3644

CHECK

08DEC05

RJ

CHECK

NOV 73

SAO

NOV 73

WJ3

NOV 73

D