

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2RW881T

BZ-2RW881T

PAGE 1 OF 1

REPLACES

PR-5256

RELEASE NO.

DRAWING
NUMBER

ISSUE

4

CHECK

REVISIONS

A	CO-69351-D	JWB	16 JUL 91
B	CO-77589	TSM	29 MAR 94
C	CO93346	DLT	14 SEP 98

CHECK

6 JAN 76

DRAW


CHECK

31 DEC 75

GLH


FORMTEK

FO-52848-A

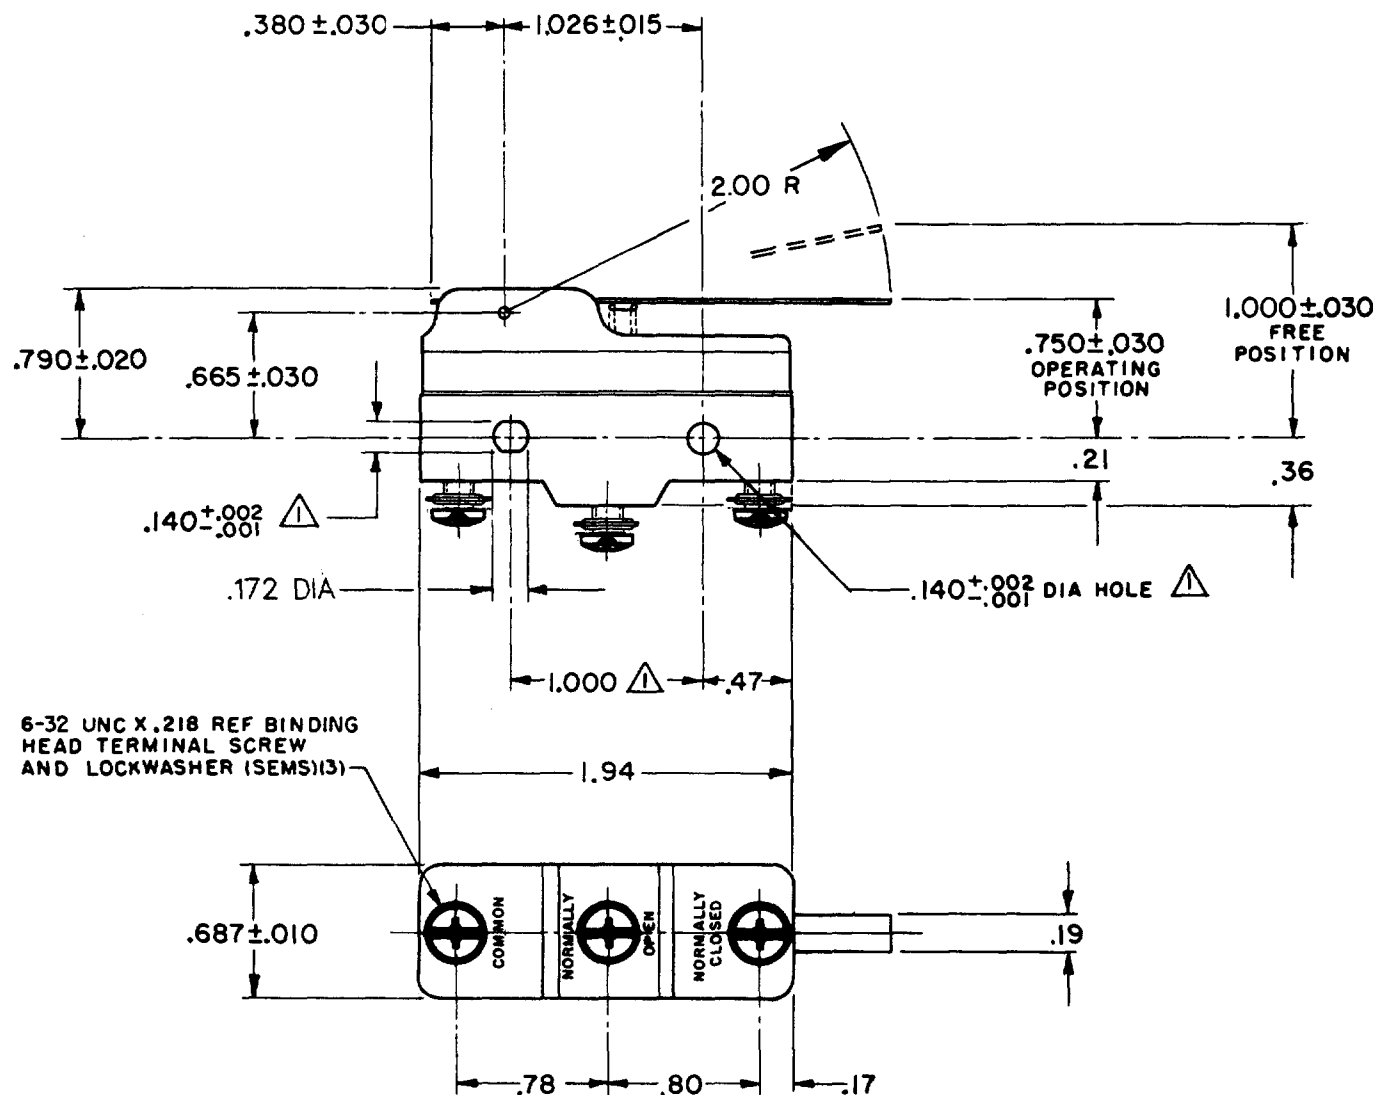

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE --- 3 1/2 OZ MAX

RELEASE FORCE --- 1/2 OZ MIN

DIFFERENTIAL TRAVEL --- .005-.040

OVERTRAVEL --- .172 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED - FILE E12252
CODE L96 15A-125, 250 OR 480 VAC
1/8HP-125 VAC; 1/4HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC

L288
L299
L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/04	X
ONE PLACE	X,X	0.4/016	X,X
TWO PLACES	X,XX	0.15/006	X,XX
THREE PLACES	X,XXX	0.13/005	X,XXX

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

WEIGHT .073 LB