

CATALOG LISTING

BZ-2RW825511-A2

PAGE 1 OF 1

ISSUE 7

REPLACES

RELEASE NO. PR-20950

CHECK

06 JAN 06

RJ

CHECK

28 JAN 94

J A L


CHECK

26 JAN 94

K D R

DRAWN

DDM/CAD

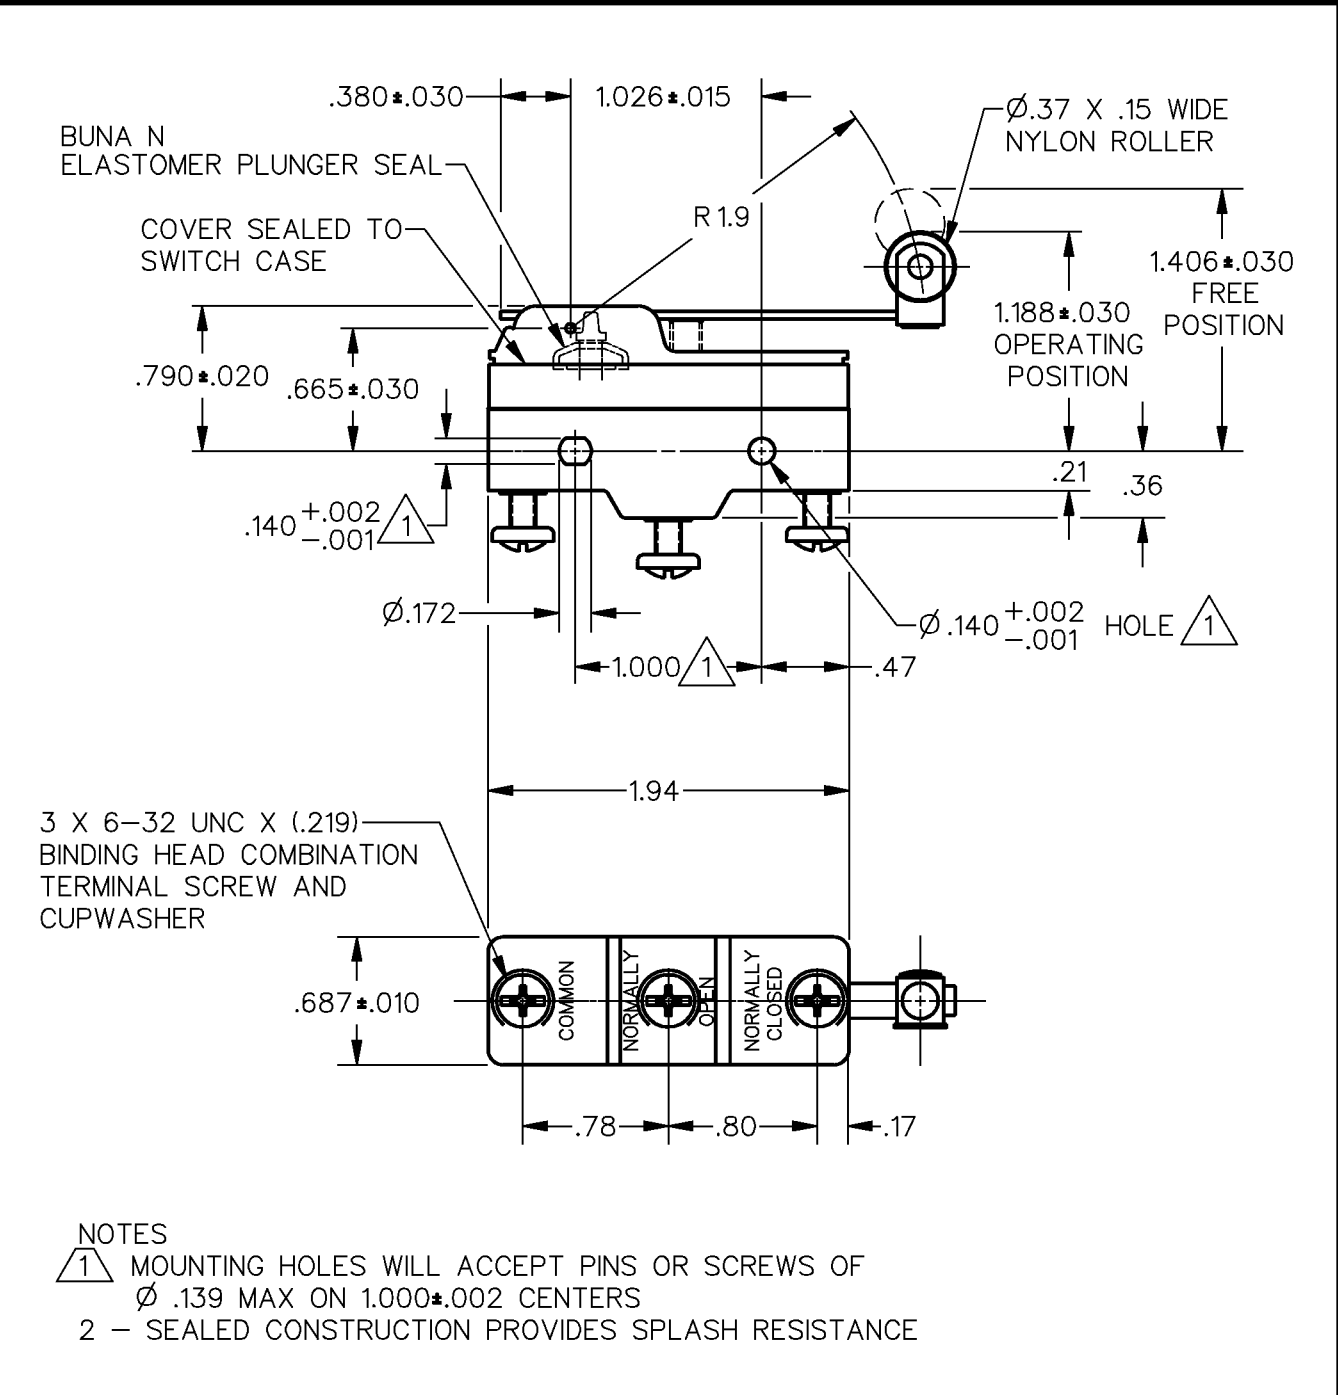

ANSI Y14.5M-1982 APPLIES			
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
THIRD ANGLE PROJECTION			
CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE — — — — 7 OZ MAX		CONTACT ARRANGEMENT S P D T	
RELEASE FORCE — — — — 3/4 OZ MIN		L96	
DIFFERENTIAL TRAVEL — — .004—.040		15A 125, <u>250</u> OR 480 VAC	
OVERTRAVEL — — — — .156 MIN		1/8HP 125 VAC, 1/4HP <u>250</u> VAC	
		1/2A 125 VDC, 1/4A 250 VDC	
		-L288- 05	
		-L315- 16A 250V ~ T85 5E4	
		-L306- 16A 250V ~ T85 5E4	
		SCALE FULL DO NOT SCALE PRINT	
		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
		ONE PLACE (.) ±.030	
		TWO PLACE (.00) ±.015	
		THREE PLACE (.000) ±.005	
		ANGLES ±	
		WEIGHT .076 LB	