



DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
12/02/05	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/18/06	B	UPDATED MATERIAL SPEC.	T.B.	B.S.	
4/29/06	C	ADDED CONTACT RESI. INFO.	T.B.	B.S.	

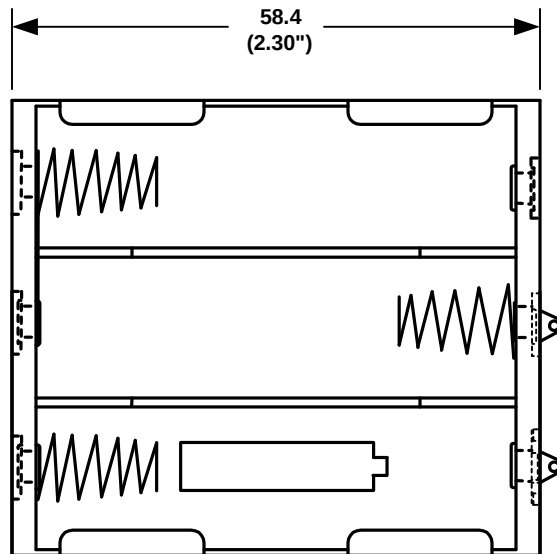


ORDERING CODE BH26AA

SOLDER LUGS = L
(6") WIRE LEADS = W
9 VOLT TYPE SNAPS =SF

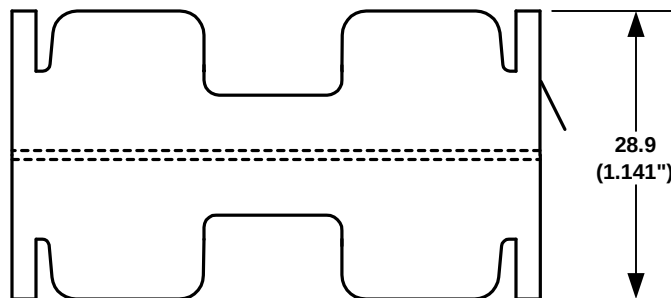

SOLDER LUGS SHOWN ABOVE

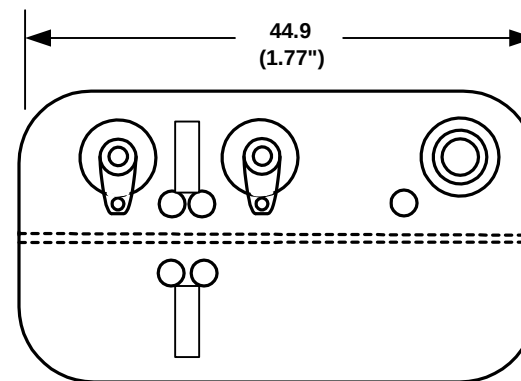

SPECIFICATIONS :

Plastic material - polypropylene
 Flammability rating-UL94 HB, UL file no. E216959
 Temperature Range: -10°C to +100°C
 Springs - nickel plated spring steel Wire - 152.4 mm Ref.Long 26 AWG,
 UL1007, CSA - TR-64, 300V, 80°C.
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated
 Contact Resistance: Under 50m Ω for +/- contacts per EIA-540J000
 ROHS COMPLIANT

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL + .5 (.020") - .5 (.020")		SCALE NONE	DRAWN BY B.S.
FRACTIONAL + .8 (.030") - .8 (.030")		APPROVED BY	
ANGULAR + 3° - 3°	DATE 4/29/2006	DRAWING NUMBER BH26AAL	



Memory Protection Devices, Inc.

200 Broad Hollow Road, Farmingdale, New York 11735

SIX "AA" CELL HOLDER