
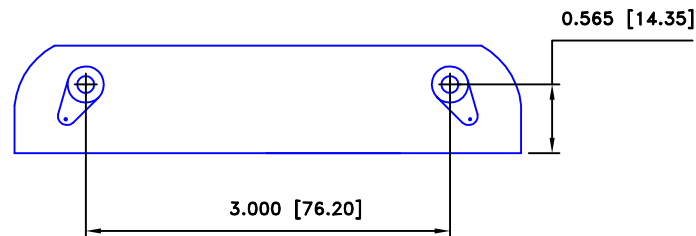
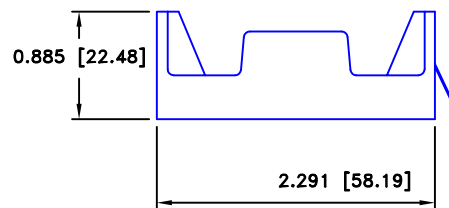


| Date     | SYM | REVISION RECORD           | AUTH | DR.  | CK. |
|----------|-----|---------------------------|------|------|-----|
| 11/12/05 | A   | ADDED "ROHS COMPLIANT"    | T.B. | B.S. |     |
| 3/18/06  | B   | UPDATED MATERIAL SPEC.    | T.B. | B.S. |     |
| 5/06/06  | C   | ADDED CONTACT RESI. INFO. | T.B. | B.S. |     |
|          |     |                           |      |      |     |
|          |     |                           |      |      |     |

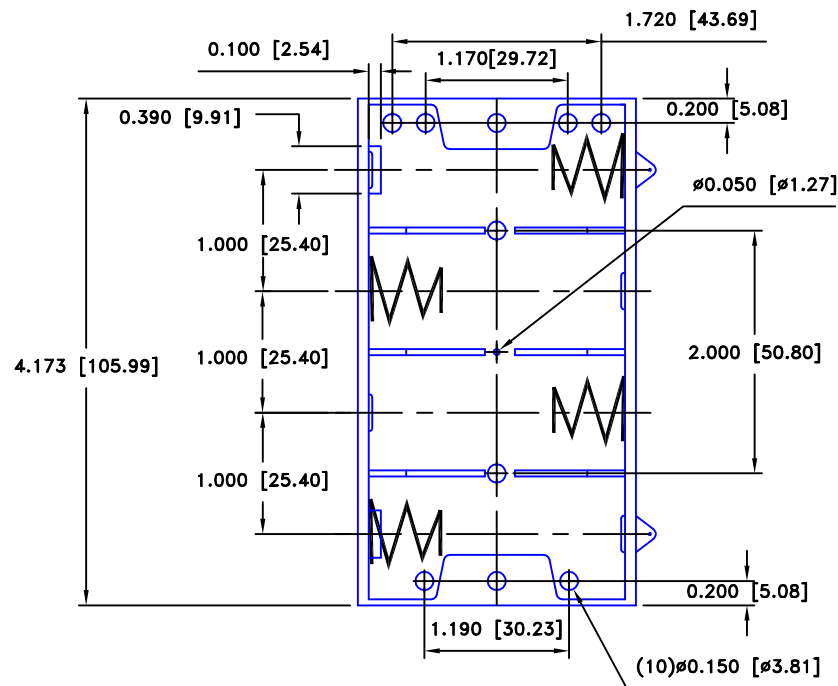

Solder Lugs shown  
ORDERING CODE BH4C

## SPECIFICATIONS

Plastic material - Polypropylene  
Flammability Rating -UL94-HB, UL File NO. E216959  
Temperature Range: -10°C to +100°C  
Springs - Nickel Plated Spring Steel  
Wire - 26 AWG, UL1007, CSA  
Rivets - Brass, Nickel Plated  
9Volt Snaps - Brass, Nickel Plated  
CONTACT RESISTANCE: UNDER 50mΩ FOR +/-  
CONTACTS PER EIA-540J000  
ROHS COMPLIANT

L- Solder Lugs  
W-(6") Wire Leads  
SF-9Volt type snaps  
B- Bump plates

|                                |                                                                                                                                                                                   |                         |               |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------------|
| Tolerance<br>(Except as noted) |  <b>Memory Protection Devices, Inc</b><br>200 Broad Hollow Road, Farmingdale, New York 11735 |                         |               |
| decimal<br>±.5 (.020)          |                                                                                                                                                                                   | Scale<br>1=1            | Drawn By T.S. |
| Fractional<br>± .8 (.030)      |                                                                                                                                                                                   | Approved By T.B.        |               |
| Angular<br>± 3°                | Title<br>FOUR "C" CELL HOLDER                                                                                                                                                     |                         |               |
|                                | Date<br>5/06/06                                                                                                                                                                   | Drawing Number<br>BH4CL |               |