


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/19/09	A	DIM. 151.13 WAS 149.2 DIM. 118.11 WAS 116.32	T.B.	B.S.	
4/19/13	B	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
6/14/13	C	UPDATED TITLE	T.B.	B.S.	

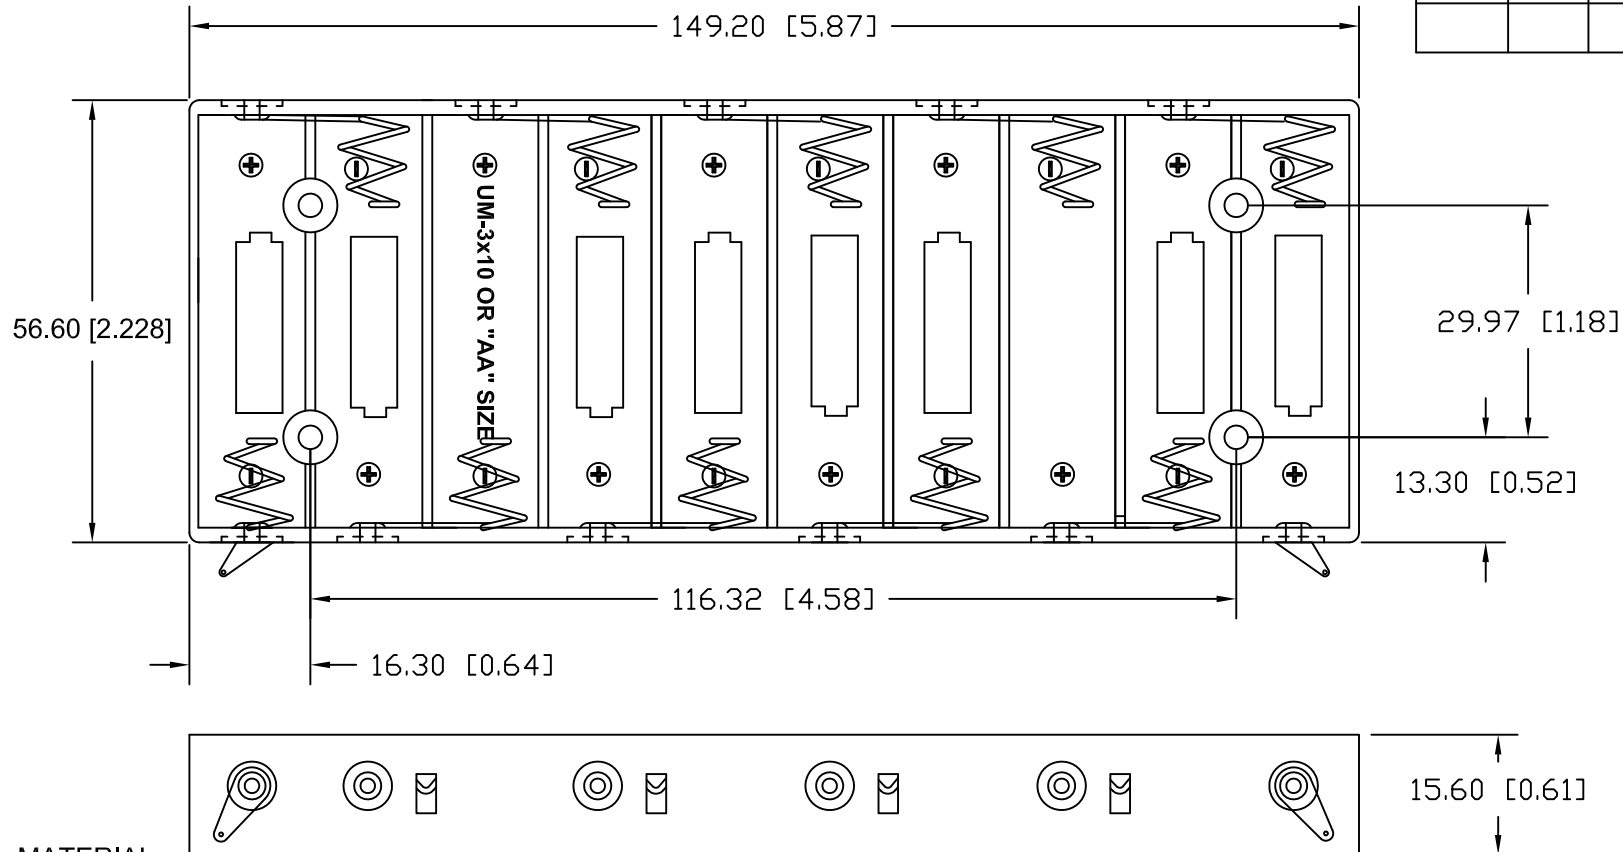


MATERIAL:

HOUSING: POLYPROPYLENE, BLACK
 FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 SPRINGS: SPRING STEEL, NICKEL PLATED
 RIVETS: BRASS, NICKEL PLATED
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS
 PER EIA-540J000
 ROHS 2 COMPLIANT

MOUNTING INSTRUCTION:

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD
 BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT.
 ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)			Scale Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title TEN "AA" CELL HOLDER WITH SOLDER LUGS		
Angular ± 3°	Date 6/14/13	Drawing Number BH10AAL	