


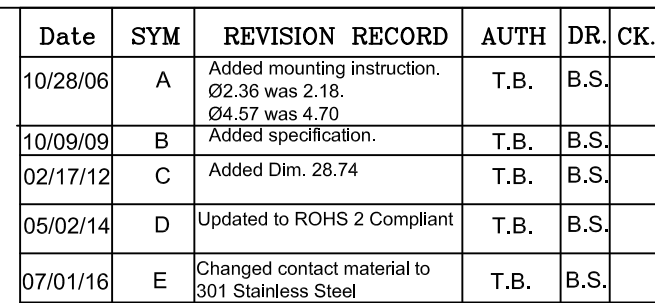

SPECIFICATION:

1. HOUSING : BLACK POLYPROPYLENE
FLAMMABILITY RATING -UL94-HB, UL FILE NO.
E216959
TEMPERATURE RANGE: -10°C to +100°C
CONTACTS: NICKLE PLATED STAINLESS STEEL
WIRES: 24AWG, UL1007,CSA TR-64, 300V, 80°C
CONTACT RESISTANCE: UNDER 50mΩ FOR +/-
CONTACTS PER EIA-540J000
ROHS 2 COMPLIANT

ITEM NO.	PART NO.	MATL. SPECIFICATION	QTY.	Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
1	ABG-194	POSITIVE CONTACT, 301 STAINLESS STEEL, NICKEL PLTD.	2	decimal $\pm .5$ (.020)		Scale	Drawn By B.S.
2	ABG-195	NEGATIVE CONTACT, 301 STAINLESS STEEL, NICKEL PLTD.	2				Approved By T.B.
3	ABG-196-1	RIGHT NEG./POS. CONTACT, 301 STAINLESS STEEL, NICKEL PLTD.	1				
4	ABG-196-2	LEFT NEG./POS. CONTACT, 301 STAINLESS STEEL, NICKEL PLTD.	1	Fractional $\pm .8$ (.030)	Title FOUR "AA" CELL SPRINGLESS HOLDER		
5	ABG-187	BLACK POLYPROPYLENE HOLDER, UL94-HB	1				
6		RED WIRE, 24AWG, UL1007, CSA TR-164, 80°C	1				
7		BLACK WIRE, 24AWG, UL1007, CSA TR-164, 80°C	1	Angular $\pm 3^\circ$	Date 07/01/16	Drawing Number BA4AAW	