



DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
8/04/07	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

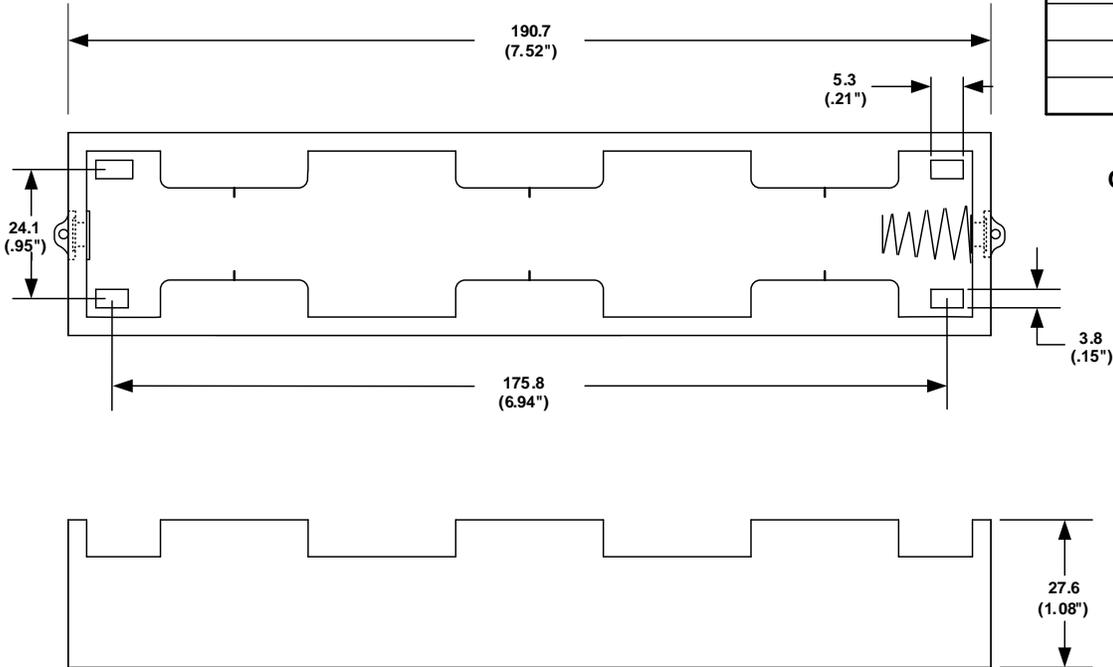

ORDERING CODE **BH13D**

SOLDER LUGS = L
WIRE LEADS = W



SOLDER LUGS SHOWN ABOVE

SPECIFICATIONS :

- Plastic material - Polypropylene, Black
- Flammability rating-UL94 HB, UL file no. E216959
- Temperature Range: -10°C to +100°C
- Springs - nickel plated spring steel
- Rivets - Brass, nickel plated
- 9 Volts Snaps - Brass, nickel plated
- Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000
- ROHS COMPLIANT

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL + .5 (.020") - .5 (.020")	SCALE	DRAWN BY S.C.	
FRACTIONAL + .8 (.030") - .8 (.030")	TITLE THREE "D" CELL HOLDER		
ANGULAR + 3° - 3°	DATE 8/04/2007	DRAWING NUMBER BH13DL	
		APPROVED BY	