


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XM-COLOR  
 HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
 CONTACT BLADE: GOLD PLATED BeCu.  
 SPRING: STAINLESS STEEL.
2. P/N: 9202-COLOR  
 HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
 FRAME: NICKEL PLATED BRASS.  
 CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
3. P/N: W-200/COLOR  
 22AWG TINNED COPPER  
 0.070 [1.78] O.D. PVC INSULATION  
 AVAILABLE IN TEN COLORS.
4. PERFORMANCE  
 MAXIMUM CURRENT: 2.5 AMPS  
 MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC  
                           HANDS FREE: 1000 W.V.D.C.  
 MAXIMUM TEMPERATURE: 200°F (93°C)

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

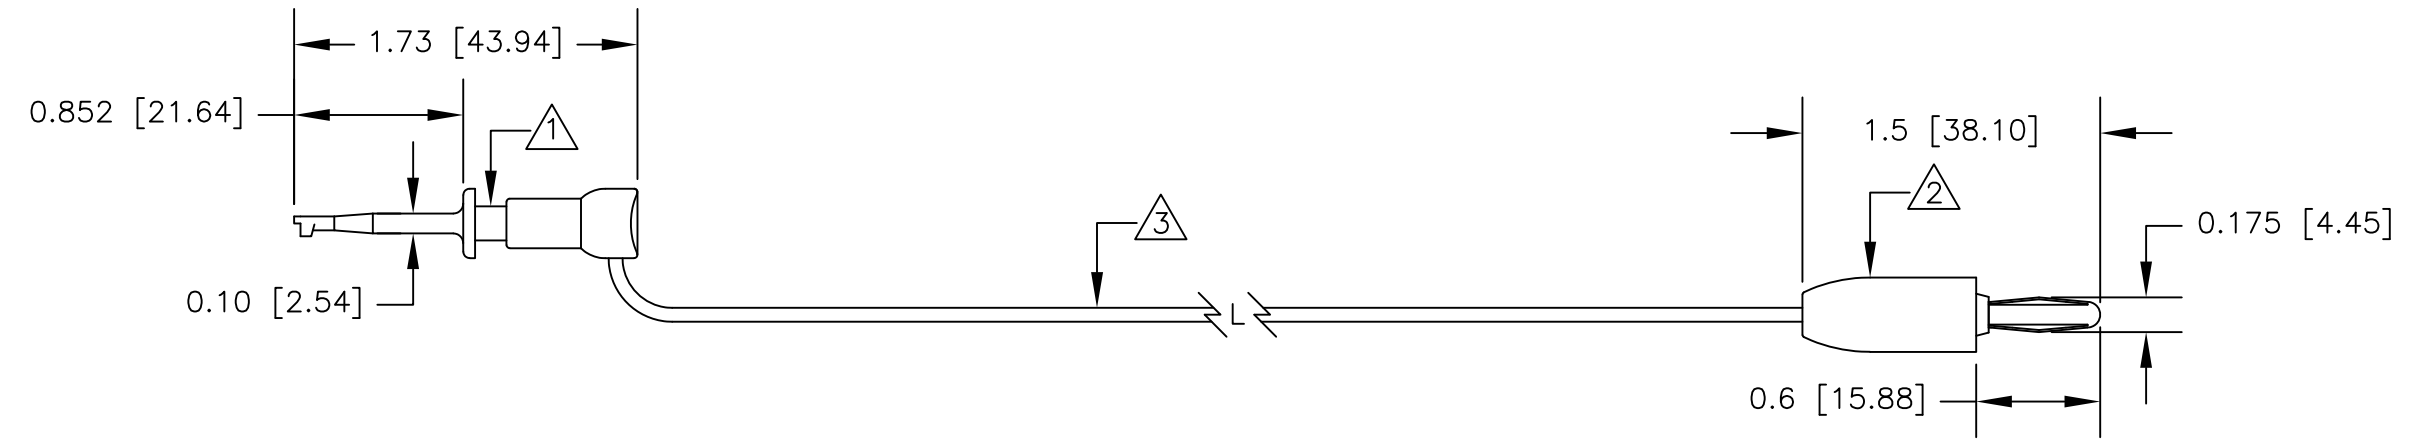

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN R.L.	4/19	DESCRIPTION XM MICROHOOK TO 9202 STD BAN PLUG
		FINISH SEE NOTE.	APPROVED BY		
NEXT ASSY	USED ON				SIZE <b>B</b>
APPLICATION		DO NOT SCALE DRAWING			CODE IDENT NO. <b>08505</b>
					DRAWING NO. BXM
					SCALE 1:1
					REV. 
					SHEET 1 OF 1