


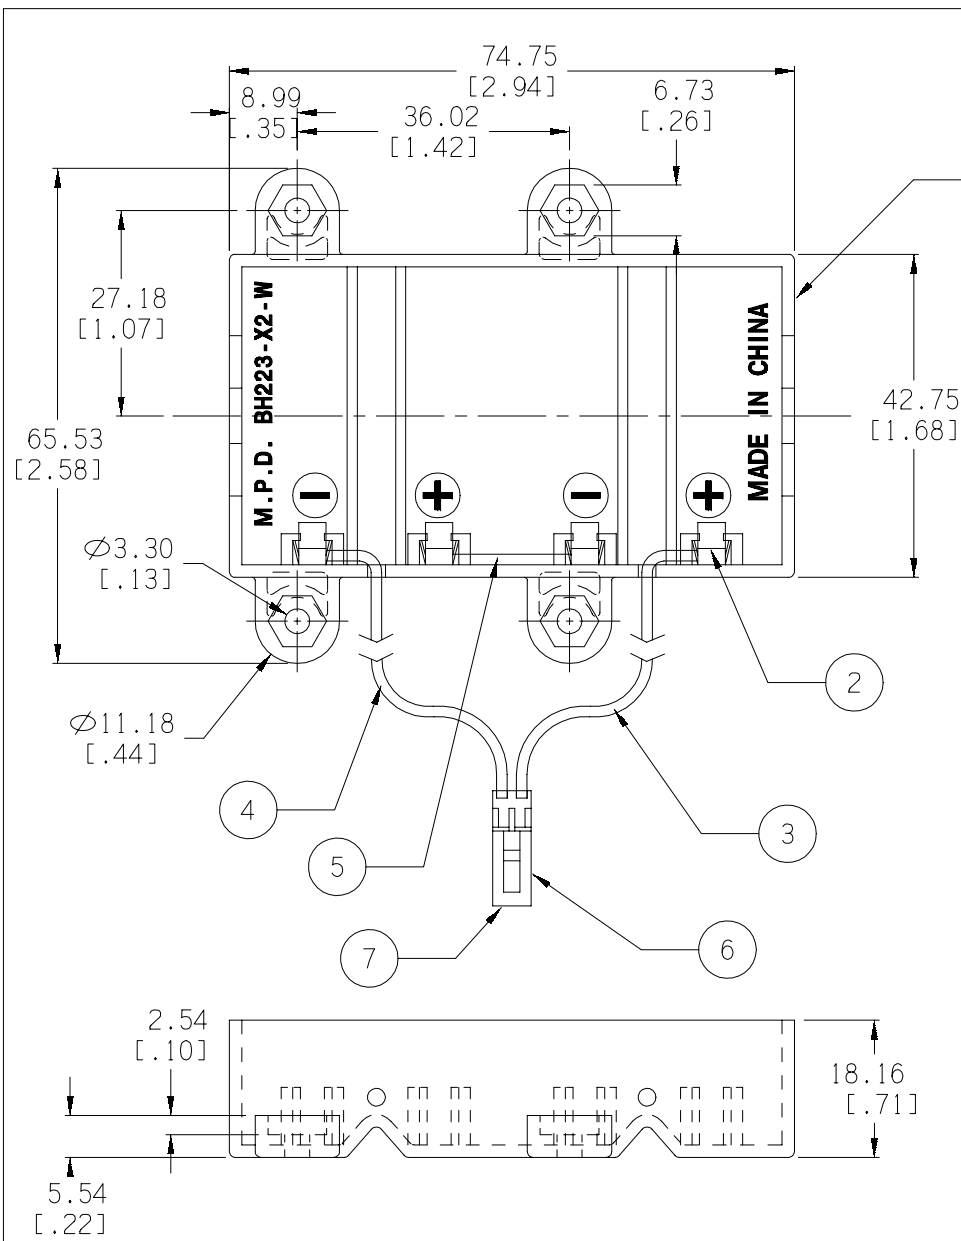

ACCEPTS: TWO DL223A OR CRP2 BATTERIES  
REQUIRES: FOUR .265" HEX NUTS TO MOUNT

| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|------|-----|-----------------|------|-----|-----|
|      |     |                 |      |     |     |
|      |     |                 |      |     |     |
|      |     |                 |      |     |     |
|      |     |                 |      |     |     |

| ITEM NO. | PART NAME                     | MATL. SPECIFICATION                         | QTY. |
|----------|-------------------------------|---------------------------------------------|------|
| 1        | MPD BATTERY CASE, DL223A TYPE | IMPACT MODIFIED HDPE, BLACK                 | 1    |
| 2        | ABG-161 CONTACT               | PHOSPORUS BONZE, NICKLE PLTD.               | 4    |
| 3        | WIRE                          | 12V LEAD, RED, #24 AWG, 18" LONG            | 1    |
| 4        | WIRE                          | GROUND LEAD, BLACK. #24 AWG, 16" LONG       | 1    |
| 5        | JUMPER                        | #24 AWG, 1.75" LONG                         | 1    |
| 6        | MOLEX HOUSING #50-57-9402     | BLACK GLASS-FILLED POLYESTER, UL94V-0       | 1    |
| 7        | MOLEX PINS #16-02-0069        | PHOSPHOR BRONZE, TIN/LEAD OVER NICKLE PLTD. | 2    |

|                           |                                                                                                                                       |                                |                                            |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------------------|
| Tolerance<br>(Inches)     | <div><div><div>MPD</div></div><div>Memory Protection Devices, Inc.<br/>200 Broad Hollow Road, Farmingdale, New York 11735</div></div> |                                |                                            |
| Decimal<br>±.5 (.020)     |                                                                                                                                       |                                | Scale<br>Drawn By B.S.<br>Approved By T.B. |
| Fractional<br>± .8 (.030) | Title<br>DL223A BATTERY HOLDER WITH MOLEX CONNECTOR                                                                                   |                                |                                            |
| Angular<br>± 3°           | Date<br>03/21/01                                                                                                                      | Drawing Number<br>BH223-X2-411 |                                            |