

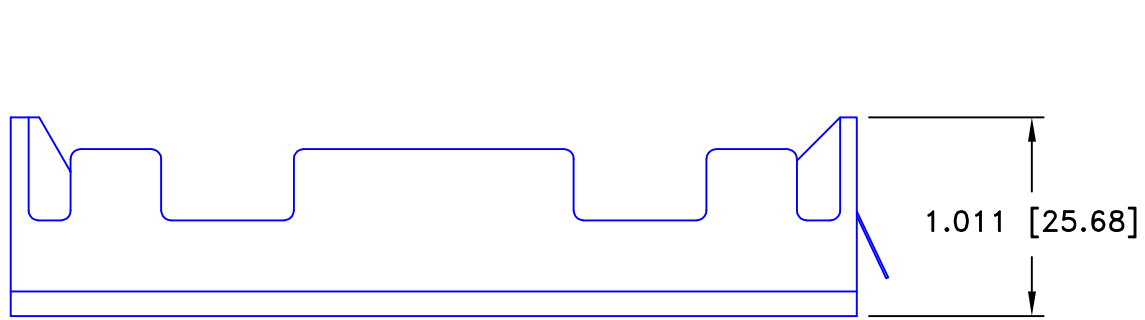


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/12/05	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/18/06	B	UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/06/06	C	ADDED CONTACT RESI. INFO.	T.B.	B.S.	

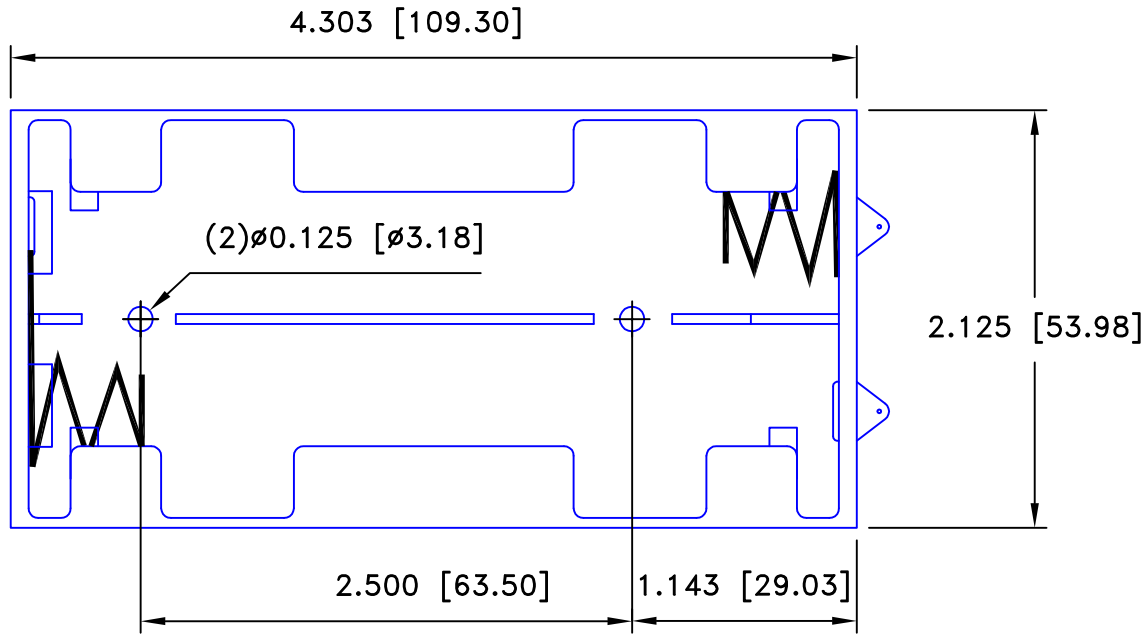

Solder Lugs shown

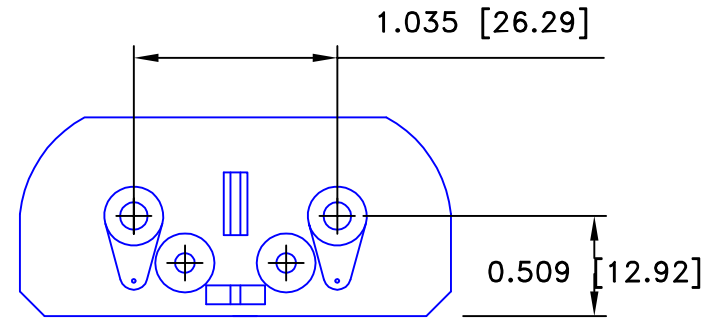

ORDERING CODE BH24C

SPECIFICATIONS

- Plastic material - Polypropylene
- Flammability Rating -UL94-HB, UL File NO. E216959
- Temperature Range: -10°C to +100°C
- Springs - Nickel Plated Spring Steel
- Wire - 26 AWG, UL1007, CSA
- Rivets - Brass, Nickel Plated
- 9Volt Snaps - Brass, Nickel Plated
- CONTACT RESISTANCE: UNDER 50mΩ FOR +/-
- CONTACTS PER EIA-540J000
- ROHS COMPLIANT

- L- Solder Lugs
- W- (6") Wire Leads
- SF- 9Volt type snaps
- B- Bump plates

Tolerance (Except as noted)	decimal ±.5 (.020)	Scale 1=1	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	
			Drawn By T.S.	Approved By T.B.
Fractional ± .8 (.030)	Title FOUR "C" CELL HOLDER			
Angular ± 3°	Date 5/06/06	Drawing Number BH24CL		