

SOLDER LUGS SHOWN ABOVE


ORDERING CODE BH48AA

SOLDER LUGS = L  
( 6") WIRE LEADS = W  
9 VOLT TYPE SNAPS =SF


### SPECIFICATIONS :

Plastic material - polypropylene  
Springs - nickel plated spring steel  
Wire - 152.4 mm Ref.Long 26 AWG,  
UL1007, CSA - TR-64, 300V, 80°C.  
Rivets - Brass, nickel plated  
9 Volts Snaps - Brass, nickel plated

DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

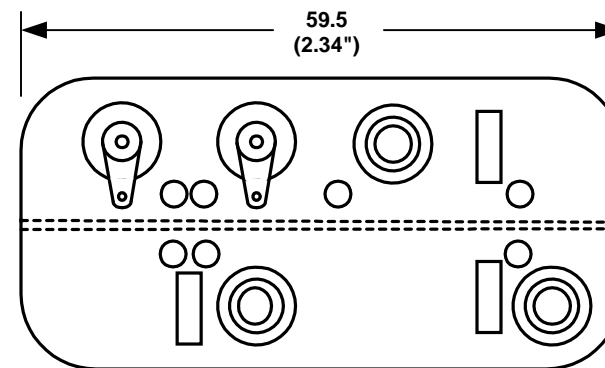

Note: Dimensions in mm. ( inches )

TOLERANCES (EXCEPT AS NOTED)		 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL			
+ .5 (.020")		SCALE NONE	DRAWN BY S.C.
FRACTIONAL		EIGHT "AA" CELL HOLDER	
+ .8 (.030")			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	02/08/2001	BH48AAL	
-			